


LEDLINE APO 10 HE IQ

-Tunable white version offers the flexibility of switching between 2700K+6500K, providing versatility in creating different moods and atmospheres.
-Strong reliability due to the co-extrusion technique. High light transmittance, anti-corrosion&anti-UV.
-Uniform light with IP65 rate suitable for indoor and outdoor decorative lighting, architectural outline lighting, etc.

ONE BIN ONLY


Color consistency
Today and tomorrow

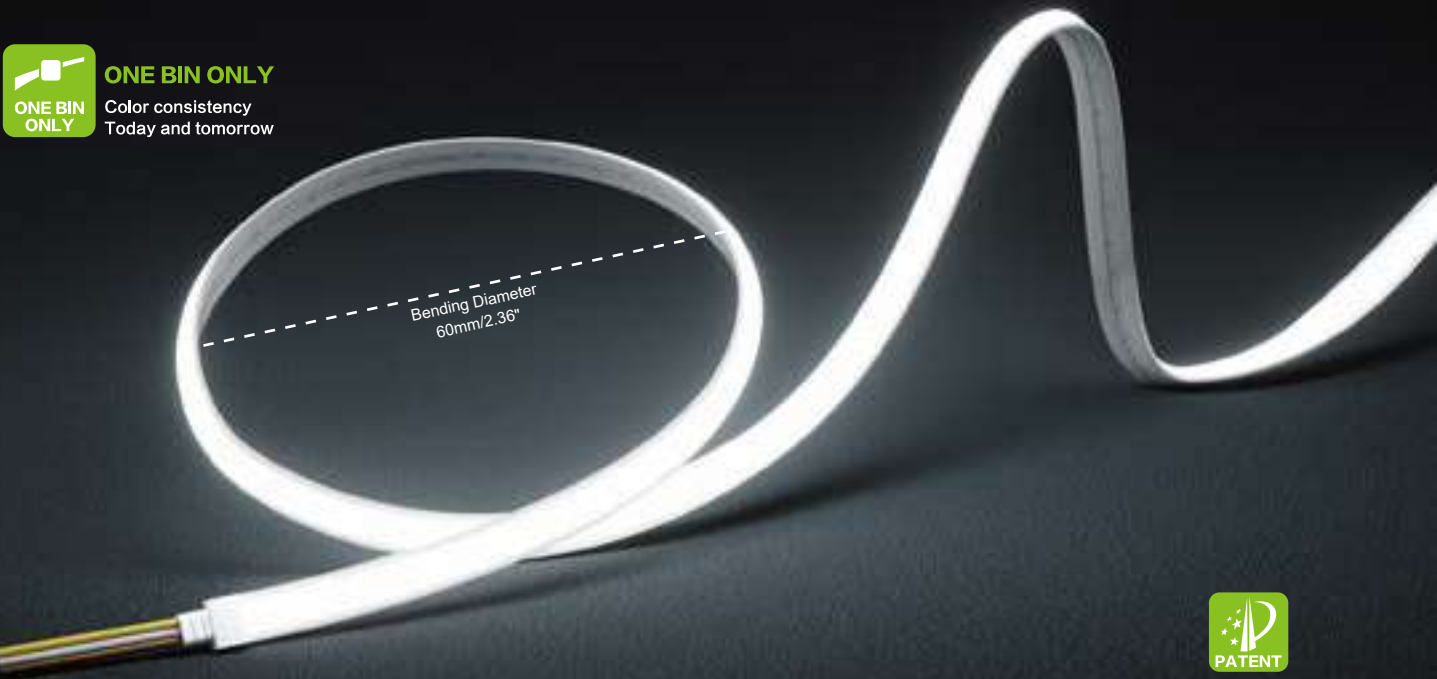

Note :
-Max. run length refers to single side feed in serial connection
-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
-To ensure proper heat dissipation and optimize performance, it is recommended to utilize aluminum profiles in conjunction with LED strips rated at or above 15W/M.

PARAMETER

LEDs/m	420LEDs/m
Voltage	DC24V
Width	10mm
Storage Temperature	-40°C /-40°F _{min} , 60°C /140°F _{max}
Ambient Temperature Ambient	Ta _{min} =-40°C /-40°F, Ta _{max} =45°C /113°F
Ambient Installation Temperature	-40°C /-40°F _{min} , 85°C /185°F _{max}
Power(W/m W/ft)	13.6/4.15
Efficacy(lm/W)	88
Life Span	>47000H
Waterproof rate	IP65
Warranty	5 Years
CRI	Ra≥90



SPECIFICATION


	CCT	LM/Mtr	Max.Watt	Max. Run Length	Unit Cut	LEDs/M
	2700K	620	6.8W/M	CV 5m	33.33mm	420
	6500K	630	6.8W/M	CV 5m	33.33mm	420
	2700K+6500K	1260	13.6W/M	CV 5m	33.33mm	420

ORDER CODE

SERIES NAME	COLOR	POWER	CC Or CV
NF APO 10 HE IQ	2765=2700+6500K	13=13.6W	CV=Constant Voltage

Example
NF.APO10HEIQ276513CV
NF APO 10 HE IQ, 2700K+6500K, 13.6W/m, Constant voltage 5m.

- 1.Max production length 20 meters per reel, and the standard packaging is 5meters per reel.
- 2.Standard cable length is 30cm, if you need cable longer than 30cm, please mention us the required cable length.

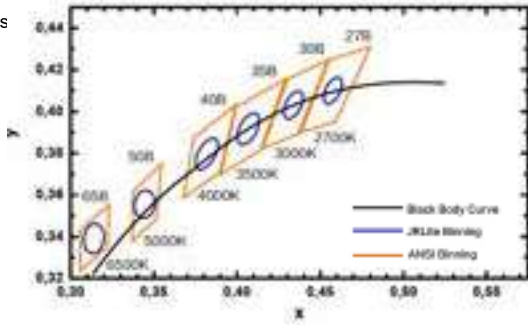

ACCESSORIES

Aluminium Profile
Order Code: AC107-AP-SA
Dimension: 1000x11.7x5.8mm/
39.37"x0.46"x0.23"(LxWxH)
Material: aluminium
Color: silver

Aluminium Profile
Order Code: AC107-AP-EA
Dimension: 1000x19x5.8mm/
39.37"x0.75"x0.23"(LxWxH)
Material: aluminium
Color: silver

Aluminium Profile
Order Code: AC107-AP-BA
Dimension: 1000x12.3x14mm/
39.37"x0.48"x0.55"(LxWxH)
Material: aluminium
Color: silver

Aluminium Profile
Order Code: AC107-CR
Dimension: 1000x11.7x5.8mm/
39.37"x0.46"x0.23"(LxWxH)
Material: aluminium
Color: silver

Mounting Clips
Order Code: AC085-10
Dimension: 14x12x5mm/
0.55"x0.47"x0.20"(LxWxH)
1Bag = 1 clip + 1 screw

Aluminium Profile
Order Code: AC107-AP-SF
Dimension: 1000x11.7x9.1mm/
39.37"x0.46"x0.36"(LxWxH)
Material: aluminium
Color: silver

Aluminium Profile
Order Code: AC107-VP
Dimension: 1000x8.27x15.41mm/
39.37"x0.33"x0.61"(LxWxH)
Material: aluminium+stainless steel
Color: silver

Aluminium Profile
Order Code: AC107-45P
Dimension: 1000x0.69x10mm/
39.37"x17.6"x0.39"(LxWxH)
Material: aluminium
Color: silver

End cap -3PIN
Order Code: AD110-3
Size: 11.8x6x15mm/
0.47"x0.24"x0.59" (LxWxH)
Material: silicone with 20cm cable
Color: white
3Pin for APO 10 tunable white

Closed end cap
Order Code: AD110
Size: 11.8x4.5x6mm/
0.46"x0.18"x0.24"(LxWxH)
Material: silicone
Color: white

Order code: M2+M3-3A
RF Controller 144W
DC24V, 3A*2Channel, Max 6A
IP20, Support remote control.

LEDLINE APO 10 Installer
Order Code: AF002-U1