


LEDLINE APO 15 RGB

-RGB version offers vibrant color options, allowing for creative and totally dot-free stunning colorful lighting effects.
-Strong reliability due to the co-extrusion technique. High light transmittance, anti-corrosion&anti-UV.
-Uniform light with IP65 rate suitable for indoor and outdoor decorative lighting, architectural outline lighting, etc.

ONE BIN ONLY


Color consistency
Today and tomorrow

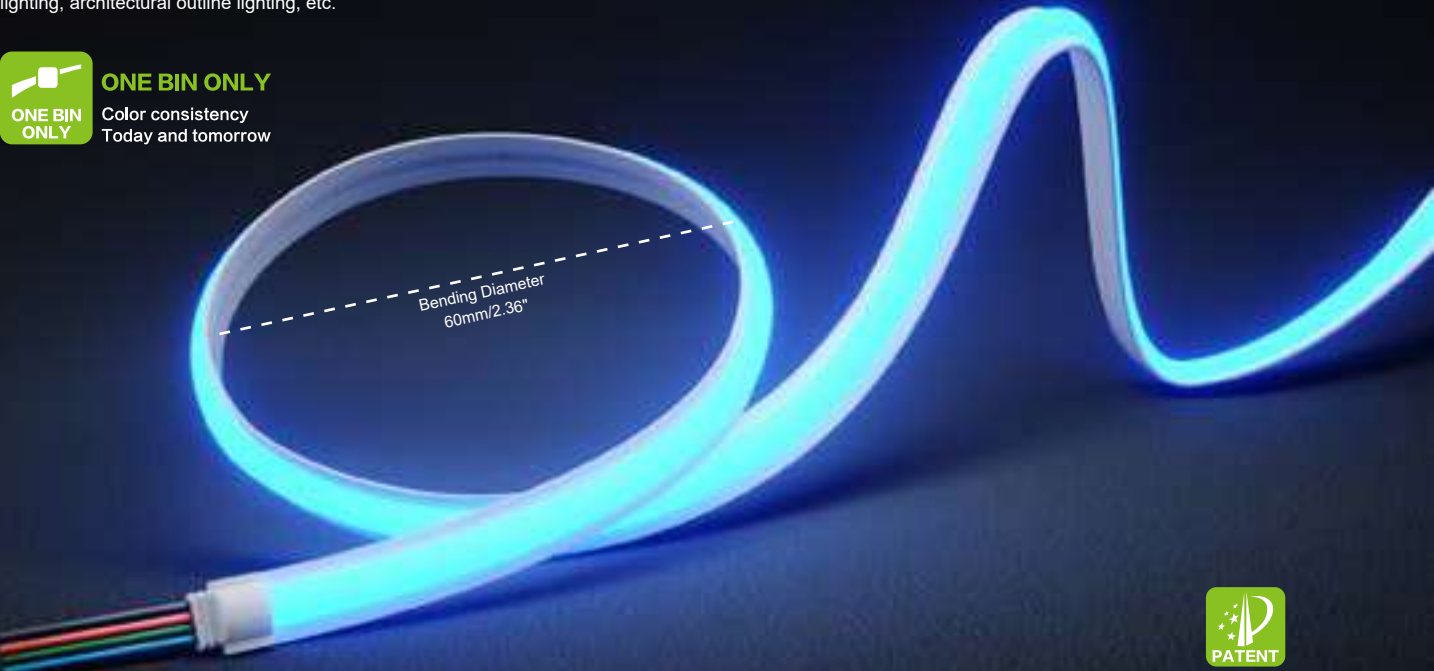

Note:
-Max. run length refers to single side feed in serial connection
-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
-To ensure proper heat dissipation and optimize performance, it is recommended to utilize aluminum profiles in conjunction with LED strips rated at or above 15W/M.

PARAMETER

Voltage	DC24V
Width	15mm
Storage Temperature	-40°C /-40°F _{min} , 60°C /140°F _{max}
Ambient Temperature Ambient	Ta _{min} =-40°C /-40°F, Ta _{max} =45°C /113°F
Ambient Installation Temperature	-40°C /-40°F _{min} , 85°C /185°F _{max}
Power(W/m W/ft)	15/4.57
Efficacy(lm/W)	37
Life Span	>38000H
Waterproof rate	IP65
Warranty	3 Years



SPECIFICATION


	CCT	LM/Mtr	Max.Watt	Max. Run Length	Unit Cut	LEDs/M
	R	115	5.8W/M	CV 5m	50mm	840
	G	375	4.2W/M	CV 5m	50mm	840
	B	70	5.8W/M	CV 5m	50mm	840
	RGB	560	15W/M	CV 5m	50mm	840

ORDER CODE

SERIES NAME	COLOR	POWER	CC Or CV
NF APO 15 RGB	RGB	15=15W	CV=Constant Voltage

Example
NF.APO15RGB15CV
APO 15 RGB, 15W/m, Constant voltage 5m.

- 1.Max production length 20 meters per reel, and the standard packaging is 5meters per reel.
- 2.Standard cable length is 30cm, if you need cable longer than 30cm, please mention us the required cable length.

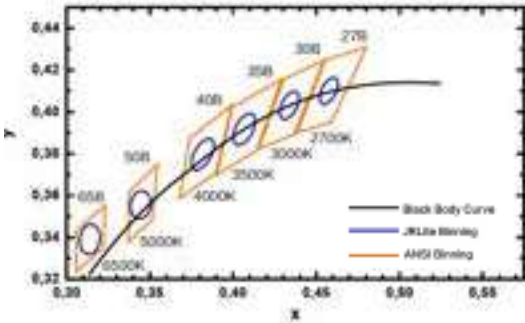

ACCESSORIES



Aluminium Profile
Order Code: AC207-AP-SA
Dimension: 1000x17x7.3mm/
39.37"x0.67"x0.29"(LxWxH)
Material: aluminium
Color: silver



Aluminium Profile
Order Code: AC207-AP-EA
Dimension: 1000x17x7.3mm/
39.37"x0.67"x0.29"(LxWxH)
Material: aluminium
Color: silver



Mounting Clips
Order Code: AC085-15
Dimension: 25x17.2x6.5mm/
0.98"x0.68"x0.26"(LxWxH)
1Bag = 1 clip + 1 screw



Aluminium Profile
Order Code: AC207-CR
Dimension: 1000x17x7.3mm/
39.37"x0.67"x0.29"(LxWxH)
Material: aluminium
Color: silver



End cap -4PIN
Order Code: AD115-4
Size: 20x17.4x9.8mm/
0.79"x0.69"x0.39" (LxWxH)
Material: silicone with 20cm cable
Color: white
4Pin for APO 15 RGB



Closed end cap
Order Code: AD115
Size: 8x17.4x9.8mm/
0.31"x0.69"x0.39" (LxWxH)
Material: silicone
Color: white



LEDLINE Scissor
Order Code: AF001-1



LEDLINE APO 15 Installer
Order Code: AF002-U2



Order code: XLG-150-24-A
AC100-305V DC24V 150W
IP67, Global certification.
Non Dimmable.



Order code: ELG-150-24B
AC100-305V DC24V 150W
IP67, Global certification
3in1 dimming function: 0-10Vdc,
10V PWM signal and resistance.



Order code: ELG-150-24DA
AC100-305V DC24V 150W
IP67, Global certification
Dali control technology.



Order code: M6+M3-3A
RF Controller 216W
DC24V, 3A*3Channel, Max 9A
IP20, Support remote control.