


WIRING DIAGRAM

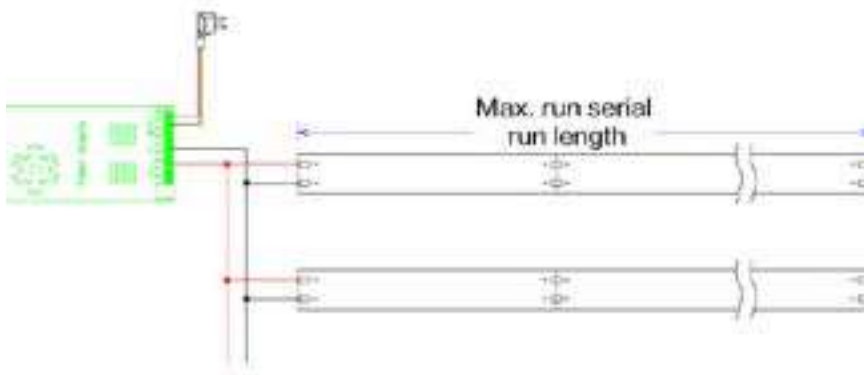

-Maximum single run length depends on the wattage of power supply and LED Strip:

For WHT Color (Single Color) :
6W/M - 10M Max. Single Run Length;

For Tunable white (IQ):
6W/M- 10M Max. Single Run Length

-The strip is 5m/reel at standard.
-Please contact us if >150W power supply is needed.

ACCESSORIES



PC Profile
Order Code: AC167-PC
Dimension: 1000x19.5x22.6mm/
39.37"x0.77"x0.89"(LxWxH)
Material: polycarbonate
Color: transparent



PC Profile
Order Code: AC167-CPC
Dimension: 1000x19.5x22.6mm/
39.37"x0.77"x0.89"(LxWxH)
Material: polycarbonate
Color: transparent



Insertion Fixture for ACE 1617
Order Code: IF-167



End Cap 2PIN
Order Code: ACS67-EC2-F
Dimension: 13x18.5x19.5mm/
0.52"x0.73"x0.77"(LxWxH)
Color: transparent
Cable Entry: front



End Cap 2PIN
Order Code: ACS67-EC2-S
Dimension: 14x19x19mm/
0.55"x0.75"x0.75"(LxWxH)
Color: transparent
Cable Entry: side




End Cap 2PIN
Order Code: ACS67-EC2-B
Dimension: 14x19x19mm/
0.55"x0.75"x0.75"(LxWxH)
Color: transparent
Cable Entry: bottom



Closed End Cap
Order Code: AC167-EC
Dimension: 14x19x19mm/
0.55"x0.75"x0.75"(LxWxH)
Color: transparent
Closed End Cap

*The number of lead wires (pin count) on the end caps/connectors varies depending on the LED strip's color temperature. If required, please consult JRL sales team for assistance.

LEDLINE SAUNA 1617

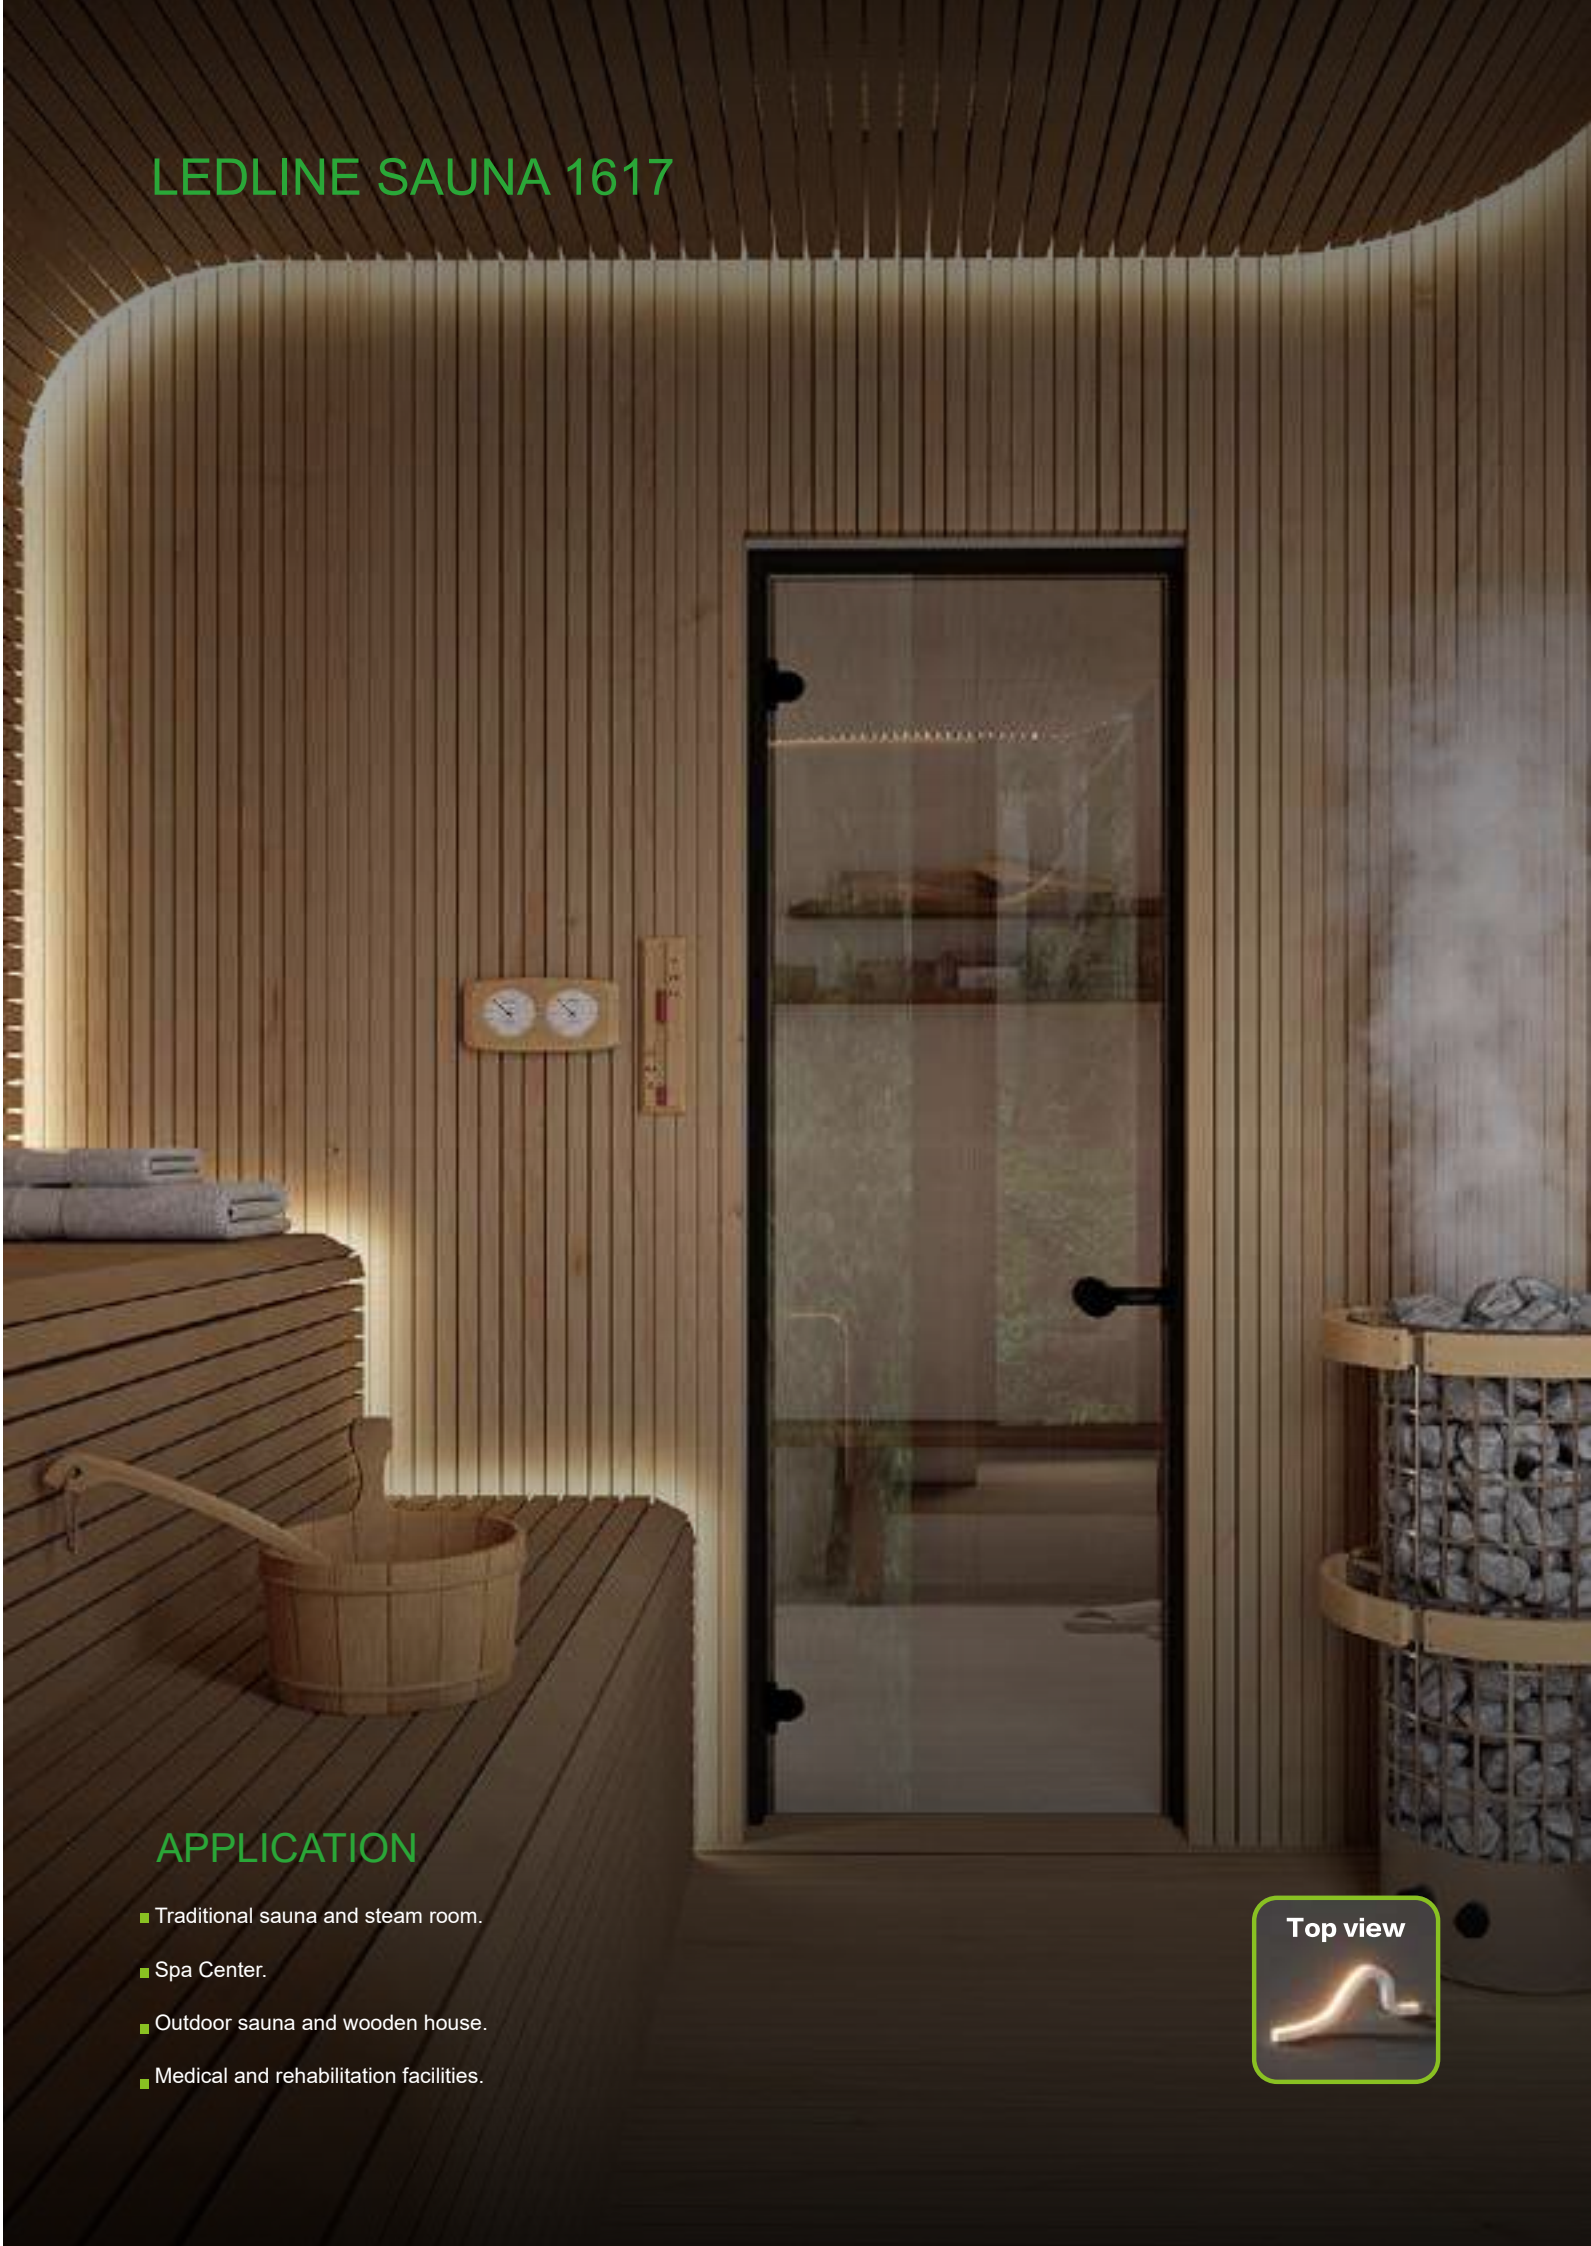

APPLICATION

- Traditional sauna and steam room.
- Spa Center.
- Outdoor sauna and wooden house.
- Medical and rehabilitation facilities.

