




LED LIGHTING
CATALOGUE

2026/02

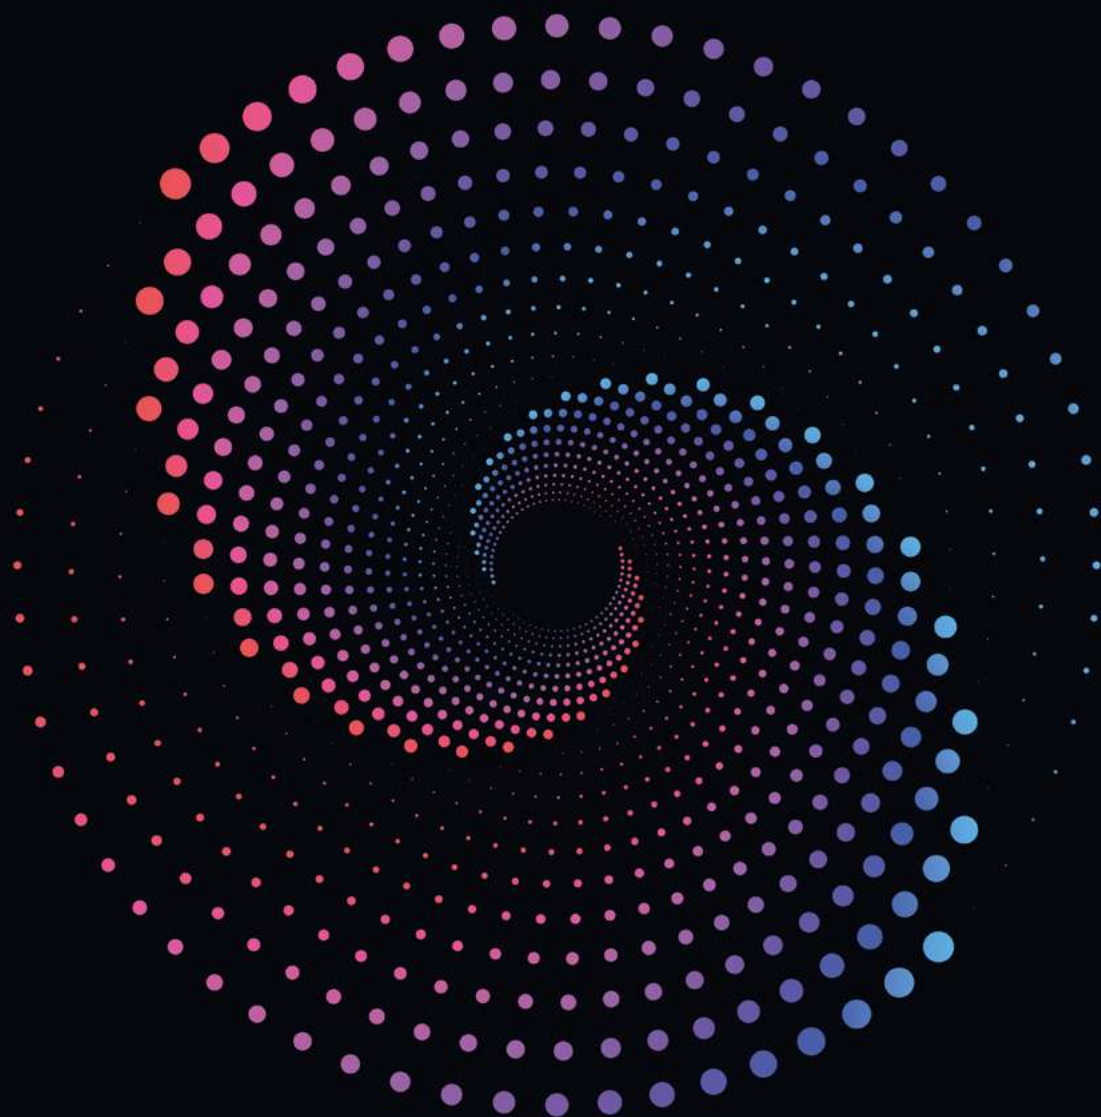

www.rglucesrl.it

WELCOME TO RG LUCE



RG LUCE s.r.l. nasce oggi come un'azienda specializzata nell'illuminazione a LED ed opera nel settore dal 2009.

Le soluzioni che l'azienda propone nascono dal desiderio di soddisfare in maniera ottimale le esigenze del mercato dell'illuminazione, ponendo particolare attenzione alle richieste personalizzate al fine di dare massima soddisfazione al cliente. L'interazione che si viene così a creare porta all'ottimizzazione del prodotto finito e allo sviluppo di nuovi progetti di illuminazione.

La ricerca e l'innovazione in campo illuminazione a LED sono gli elementi che contraddistinguono il nostro gruppo di lavoro, unito dalla stessa passione nel realizzare prodotti altamente tecnologici in ambito illuminotecnico.

Uno staff composto da personale qualificato e di provata esperienza è messo a disposizione della Clientela per curare gli aspetti di carattere tecnico-commerciale e per garantire la necessaria assistenza in fase di progettazione del tuo impianto di illuminazione ed in particolare di luci a LED.

RG LUCE s.r.l is a company specialized in led lighting system,founded by who have rich experience in this field. We offer only the good quality led products to our customers. We make special attention to the custom-made requests in order to give maximum satisfaction.

Research and innovation are the elements that characterize our working group,the same passion to build cohesive ad the most technologically powerful can be offered in the lighting field.

We have a team with professional technical and business people with knowledge for LED light source,available and happy to give our customers 360° service.Once our clients start business with us,we are sure to become long term and worry free business partners.



RGLUCE LUMINAIRES TO FACE THE PROJECTS OF THE FUTURE.

RGLUCE's lamps are total recyclable and sustainable innovative interchangeable features. We always consider environmental issues a key factor on developing our products. For this reason, we created a series of luminaires developed to help reduce environmental impact without compromising quality and functionality.

INDEX

LED DOWN LIGHTS & CEILING LIGHTS



05
D15100-A / D15150-A
D15180-A / D15205-A
D15250-A



06
D15100-B / D15150-B
D15180-B / D15205-B
D15250-B



09
D18170-A / D18100-A
D18130-A



10
MD6.5 / MD10



12
D9070-A1M
D9070-A1B



13
D10075-AM
D10095-AM



14
D2070 / D2100
D2130 / D2150
D2205



15
OD10T / OD14T
OD17T / OD25T



16
ODF10 / ODF14
ODF17 / ODF25



18
ODF40



21
LD386R / LD388R



22
LD486R / LD488R



23
LD90 / LD125
LD145 / LD170



24
LD640P-11 / LD640P-12
LD640P-13



29
C19360-A
C19410-A



31
C7022-A / C7028-A
C7033-A



C7220-A / C7280-A
C7330-A



CD0180 / CD0220
CD0300 / CD1818
CD2222 / CD3030



AR6W-CCT3
AR12W-CCT3
AR18W-CCT3
AR24W-CCT3



PDR09250 / PDR09400



D12090




C20090 / C20140
C20185

LED LINEAR LIGHT



L0601 / L1201



L1203-DA



L1203-DR



TRP-060C / TRP-120C
TRP-150C

LED PANEL LIGHTS



P0610-DTMH




P6060BLHU
P3120BLHU



P3030 / P3060 / P3120
P6060HU / P3120HU


LED TRACK LIGHTS



TS03L300 / TS03L600
TS03L1200



TS03R06T / TS03R12T



TS03L06T / TS03L12T
TS03L18T



TS03S35 / TS03S45
TS03S55 / TS03S65



TS03P01



TS12 / TS20 / TS33
TSN12 / TSN20 / TSN33



TS.U.20 / TS.U.30 / TS.U.40
TSN.U.20 / TSN.U.30 / TSN.U.40

LED GROUND LIGHTS & WALL LAMP



MINIFL-3W / MINIFS-3W



FL-3W / FS-3W
FT-3W



FL-3x1W / FL-6x1W
FL-9X1W / FL-3X3W-RGB
FL-9X1W-RGB



FL-7W
FL-14W
FL-21W



GL-3x1W / GL-3x3W-RGB



A615



A003CCT3B
A003CCT3N



B003CCT3B
B003CCT3N



A902-3CCT
A902E-3CCT



BH0117 / BH0118



BH1109 / BH1109N

LED FLOOD LIGHTS & STREET LIGHTS



FDBN / FDCN



FDT



Z120 / Z180



J50

LED Highbay Lights



LED Strip



LED Power Supply & Controller



LED Profile



LED DOWN LIGHTS & CEILING LIGHTS

■ PRESTAZIONI / PERFORMANCE

Serie di prodotti ideali per tutte le applicazioni ad incasso e a plafone in interno.

Ideali per l'illuminazione di uffici, zone comuni, aree di vendita, esposizioni ecc.

Una completa gamma di potenze, ottiche e diffusori danno la garanzia di poter trovare il prodotto corretto per ogni tipo di applicazione.

Series of products ideal for all indoor recessed and surface-mounted applications.


Ideal for lighting offices, common areas, sales areas, exhibitions, etc.

A complete range of powers, optics and diffusers give the guarantee of being able to find the correct product for each type of application.



EXPLORER


Series

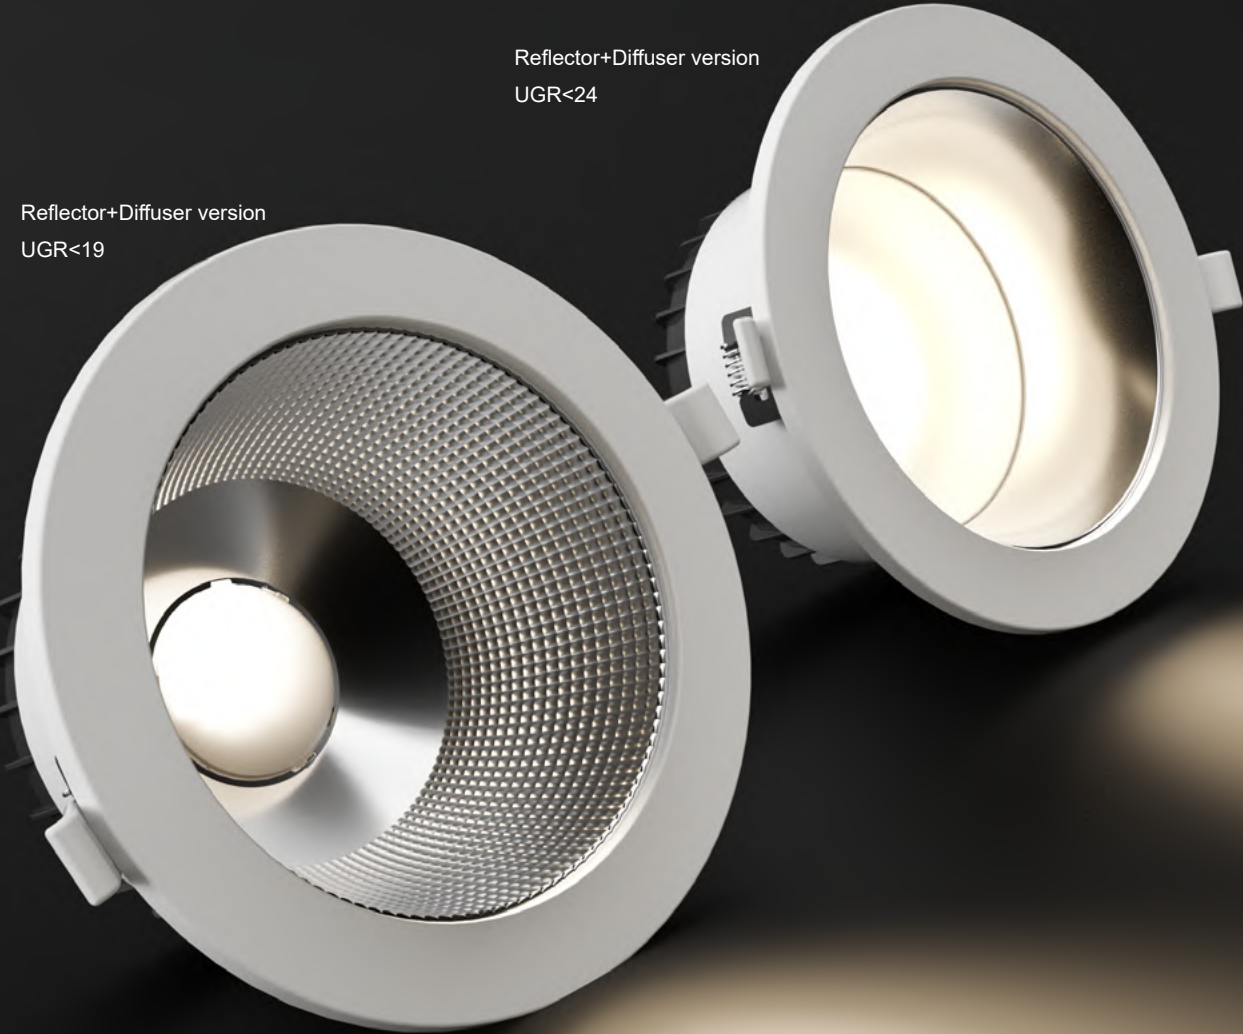

Only for reflector+diffuser version



White Bright silver Matt silver


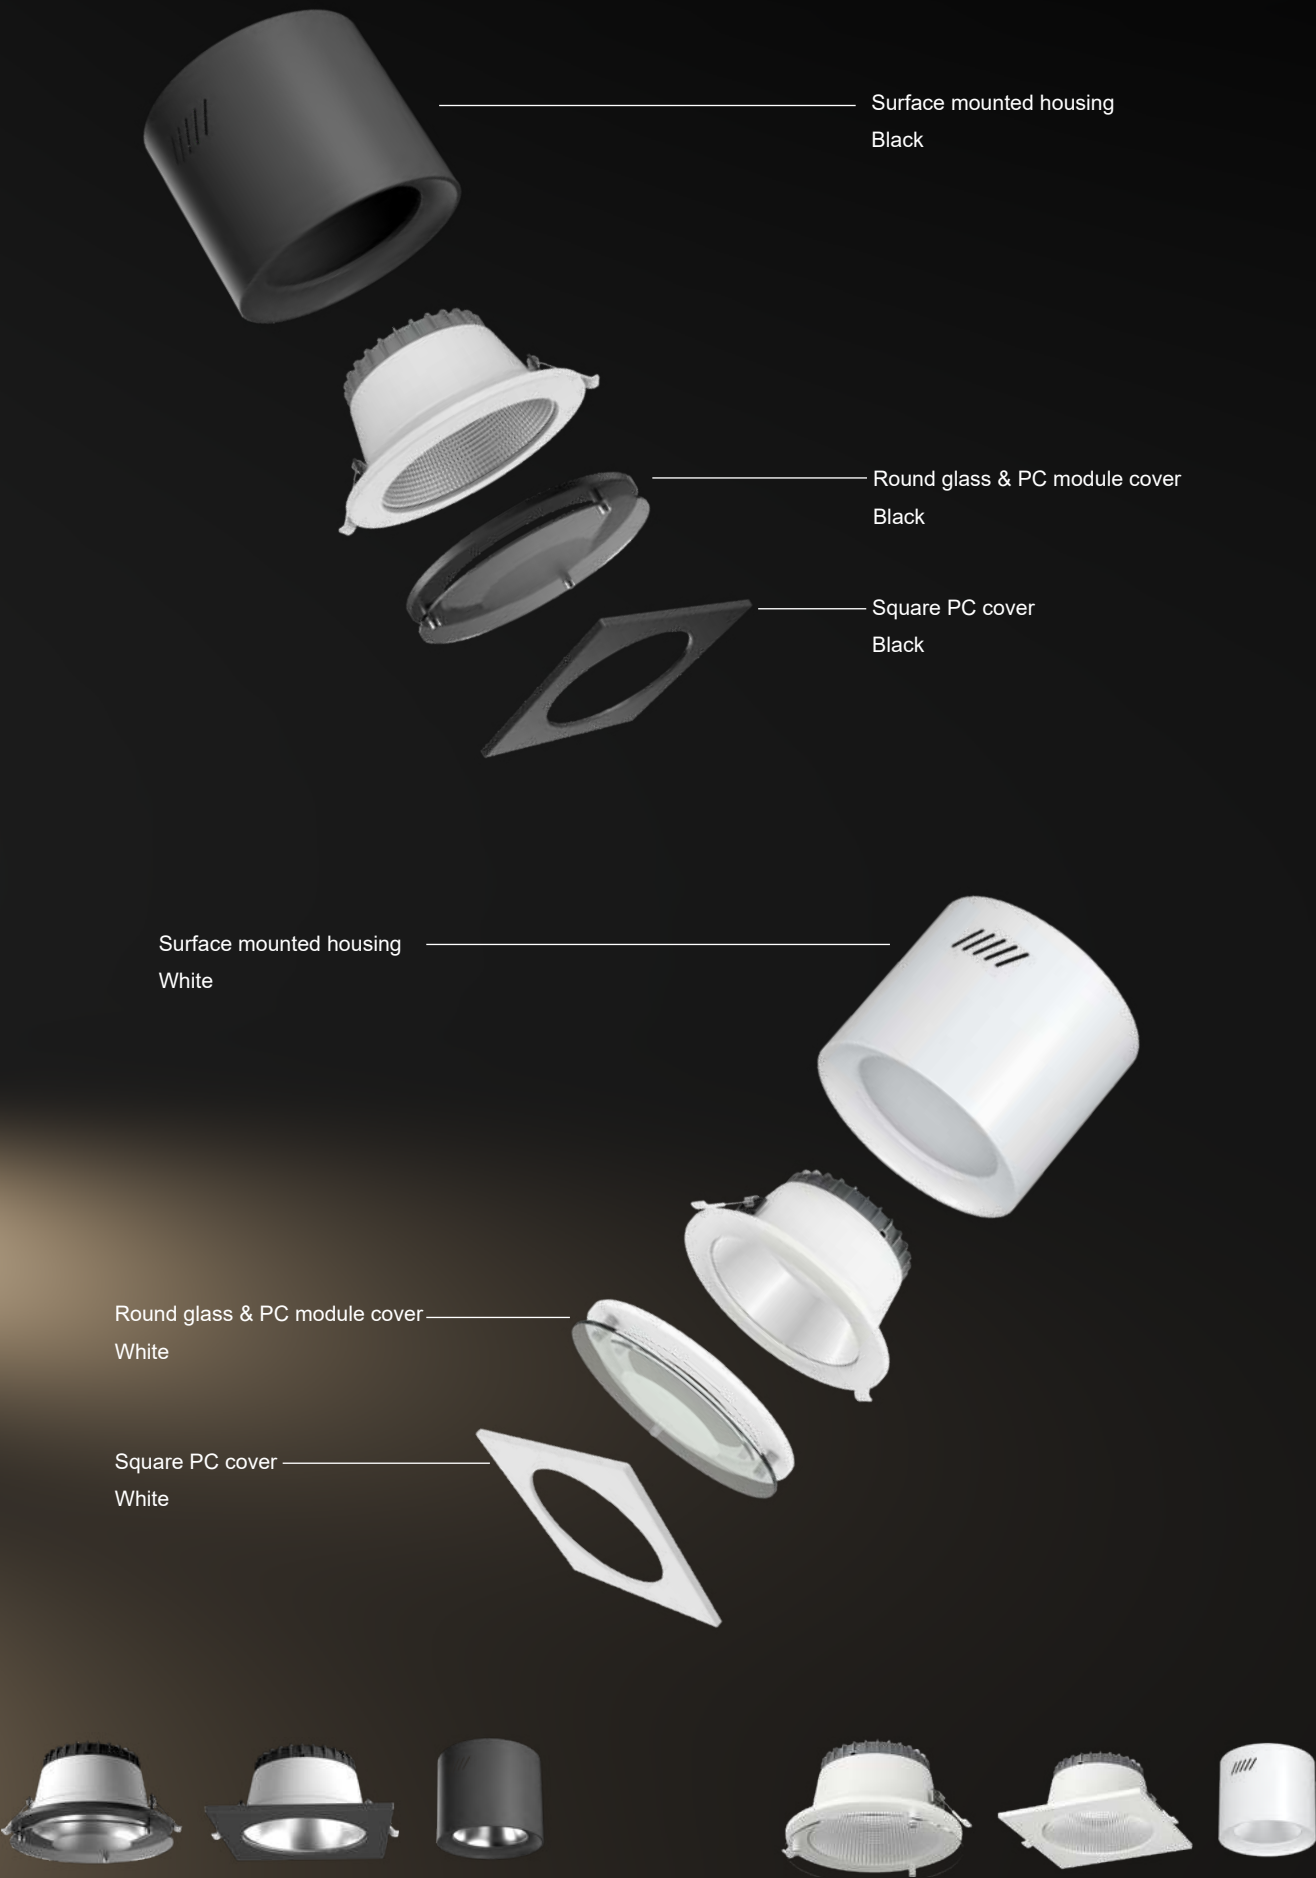


LED DOWN LIGHTS



EXPLORER

- Corpo in alluminio rivestito in plastica termo-conduttiva.
- Diversi accessori ad anello disponibili: rotondo/ quadrato/in vetro
- Garanzia: 5 anni
- Aluminum body covered in thermo-conductive plastic.
- Various ring accessories for options: Round/Square/Glass
- Warranty: 5 years

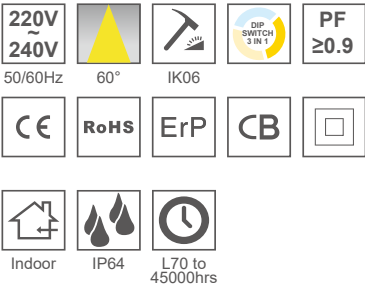

UGR <19 CRI >90 IP64 front side



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
D15100-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	10W	250mA	950lm	95lm/W	>90Ra	Φ114xH66mm	Φ90-102mm
D15150-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	20W	500mA	1900lm	95lm/W	>90Ra	Φ174xH87mm	Φ145-155mm
D15180-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	28W	700mA	2660lm	95lm/W	>90Ra	Φ200xH97mm	Φ165-180mm
D15205-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	35W	900mA	3325lm	95lm/W	>90Ra	Φ232xH110mm	Φ195-210mm
D15250-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	50W	1250mA	4750lm	95lm/W	>90Ra	Φ280xH130mm	Φ240-255mm

LED DOWN LIGHTS



EXPLORER

- Corpo in alluminio rivestito in plastica termo-conduttiva.
- Diversi accessori ad anello disponibili: rotondo/ quadrato/in vetro
- Garanzia: 5 anni
- Aluminum body covered in thermo-conductive plastic.
- Various ring accessories for options: Round/Square/Glass
- Warranty: 5 years

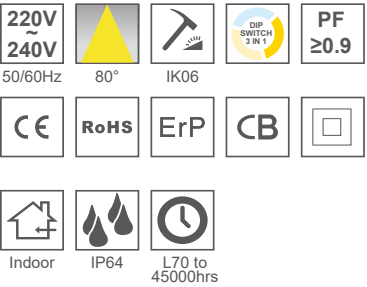

CRI >90 IP64 front side

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
D15100-B	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	10W	250mA	1100lm	110lm/W	>90Ra	Φ114xH66mm	Φ90-102mm
D15150-B	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	20W	500mA	2400lm	120lm/W	>90Ra	Φ174xH87mm	Φ145-155mm
D15180-B	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	28W	700mA	3220lm	115lm/W	>90Ra	Φ200xH97mm	Φ165-180mm
D15205-B	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	35W	900mA	4025lm	115lm/W	>90Ra	Φ232xH110mm	Φ195-210mm
D15250-B	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	50W	1250mA	5750lm	110lm/W	>90Ra	Φ280xH130mm	Φ240-255mm



DIAMOND

Series

4"/5"reflector
40°/60°



3"reflector
40°/60°



white ring



Black ring



Nickel black



Matt silver



Matt white



Bright silver



Matt black



Bright white





Bright black

LED DOWN LIGHTS



DIAMOND

- Corpo in alluminio rivestito in plastica termo-conduttiva.
- Classificazione V-0.
- Driver integrato dimmerabile triac.
- Garanzia: 3 anni
- Thermal conductive plastic coated aluminum housing,V-0 flame rating.
- Different color anti-glare reflector well suited for DIY.
- White & Black color face ring available.
- Driver built-in, triac Dimmable driver built-in,integrated design
- Warranty: 3 years


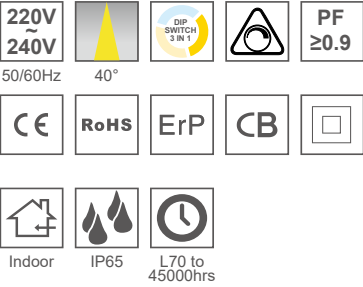


LED DOWN LIGHTS



MELODY

- Corpo in alluminio rivestito in plastica termo-conduttiva.
- Classificazione V-0
- Gruppo ottico basculante di 30°.
- Dimmerabile Trac.
- Garanzia: 3 anni
- Aluminum body covered in thermo-conductive plastic.
- V-0 classification
- 30 ° tilting optical unit.
- Triac Dimmable.
- Warranty: 3 years

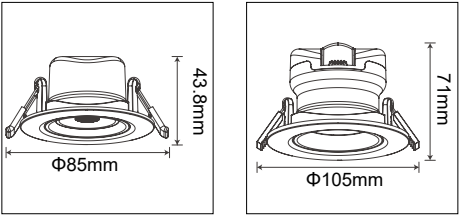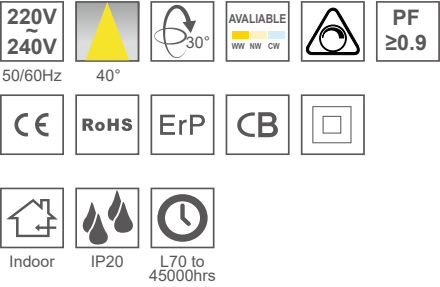

UGR <19 CRI >90 Triac Dimmable Dual Power IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
D18070-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	6W	80mA	570lm	95lm/W	>90Ra	Φ84x55mm	Φ68-76mm
D18100-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	6W	80mA	660lm	110lm/W	>90Ra	Φ106x67mm	Φ90-98mm
			9W	120mA	900lm	100lm/W			
D18130-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	9W	70mA	990lm	110lm/W	>90Ra	Φ140x80mm	Φ120-130mm
			12W	90mA	1260lm	105lm/W			

Triac Dimmable

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
MD6.5-WW	Bianco White	3000K	6.5W	90mA	550lm	92lm/W	>80Ra	Φ85x43.8mm	Φ68-75mm
MD6.5- NW		4000K	6.5W	90mA	600lm				
MD10-WW	Bianco White	3000K	10W	70mA	950lm	105lm/W	>80Ra	Φ105xH71mm	Φ83-95mm
MD10- NW		4000K	10W	70mA	1000lm				

MIRACLE



Series



LED DOWN LIGHTS

MIRACLE

- Corpo in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato dimmerabile triac.
 - Garanzia: 3 anni
- Body in thermo-conductive plastic.
 - V-0 classification.
 - Integrated triac dimmable driver.
 - Warranty: 3 years



Triac Dimmable

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
D9070-A1M-WW	Bianco White	3000K	6W	40mA	550lm	90lm/W	>80Ra	Φ81x79mm	Φ68-73mm
D9070-A1M-NW		4000K	6W	40mA	600lm				
D9100-A1M-WW	Bianco White	3000K	9W	70mA	810lm	100lm/W	>80Ra	Φ103x91mm	Φ90-95mm
D9100-A1M-NW		4000K	9W	70mA	900lm				
D9070-A1B-WW	Nero Black	3000K	6W	40mA	460lm	75lm/W	>80Ra	Φ81x79mm	Φ68-73mm
D9070-A1B-NW		4000K	6W	40mA	500lm				
D9100-A1B-WW	Nero Black	3000K	9W	70mA	680lm	81lm/W	>80Ra	Φ103x91mm	Φ90-95mm
D9100-A1B-NW		4000K	9W	70mA	730lm				

Triac Dimmable



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
D9070-A1M-TW	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	6W	40mA	530lm	88lm/W	>80Ra	Φ81x79mm	Φ68-73mm
D9100-A1M-TW	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	9W	70mA	780lm	86lm/W	>80Ra	Φ103x91mm	Φ90-95mm
D9070-A1B-TW	Nero Black	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	6W	40mA	470lm	78lm/W	>80Ra	Φ81x79mm	Φ68-73mm
D9100-A1B-TW	Nero Black	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	9W	70mA	630lm	70lm/W	>80Ra	Φ103x91mm	Φ90-95mm

LED DOWN LIGHTS



MAGIC

- Anello in alluminio verniciato bianco.
 - Dissipatore in alluminio verniciato nero
 - Gruppo ottico orientabile di 350° e basculante di 30°.
 - Driver esterno ON / OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Garanzia: 3 anni
- White painted aluminum ring.
 - Black painted aluminum heatsink
 - Optical unit adjustable by 350 ° and tilting by 30 °.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 3 years

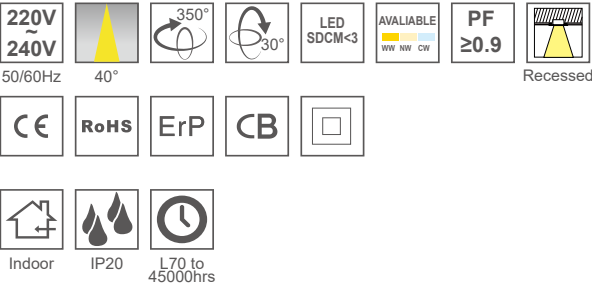

UGR <19



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
D10075-AM-WW	Bianco White	3000K	10W	70mA	750lm	85lm/W	>80Ra	Φ85x98mm	Φ73-78mm
D10075-AM-NW		4000K	10W	70mA	850lm				
D10095-AM-WW	Bianco White	3000K	15W	180mA	1125lm	85lm/W	>80Ra	Φ105x113mm	Φ90-95mm
D10095-AM-NW		4000K	15W	180mA	1275lm				

LED DOWN LIGHTS



LEGEND

- Anello e corpo in alluminio verniciato bianco.
 - Driver esterno ON / OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Garanzia: 3 anni
- Ring and body in white painted aluminum.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 3 years

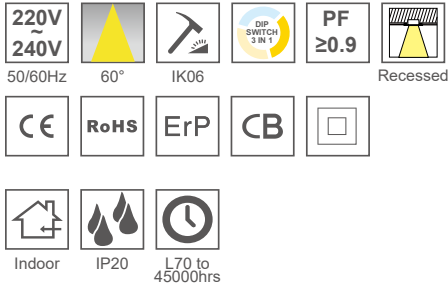

UGR <19

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
D2070-CM-TW	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	6W	200mA	490lm	88lm/W	>80Ra	Φ95xH57mm	Φ68-80mm
D2100-CM-TW	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	10W	350mA	880lm	88lm/W	>80Ra	Φ113xH68.5mm	Φ90-102mm
D2130-CM-TW	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	15W	700mA	1320lm	88lm/W	>80Ra	Φ145xH81.8mm	Φ120-130mm
D2150-CM-TW	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	20W	700mA	1800lm	90lm/W	>80Ra	Φ174xH88.8mm	Φ145-155mm
D2205-CM-TW	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	35W	900mA	3150lm	90lm/W	>80Ra	Φ232xH112.8mm	Φ195-210mm

LED DOWN LIGHTS



OD

- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato dimmerabile triac.
 - Garanzia: 3 anni
- Aluminum body covered in thermo-conductive plastic.
 - V-0 classification.
 - Integrated triac dimmable driver.
 - Warranty: 3 years

220V
240V

50/60Hz

90°

IK03

IK06

PF ≥0.9

Recessed

CE

RoHS


ErP

CB

Indoor

IP20

L70 to 45000hrs

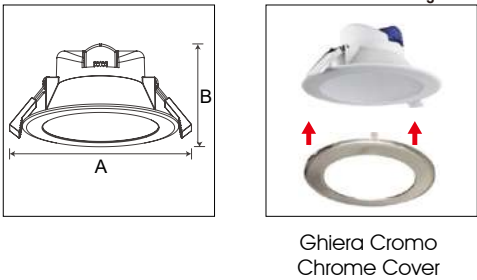

Triac Dimmable

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
OD10T	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	9W	70mA	800lm	88lm/W	>80Ra	Φ113xH58.6mm	Φ90-102mm
OD14T	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	14W	100mA	1260lm	90lm/W	>80Ra	Φ145xH65.8mm	Φ120-130mm
OD17T	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	17W	130mA	1530lm	90lm/W	>80Ra	Φ174xH68.5mm	Φ145-155mm
OD25T	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	25W	180mA	2450lm	98lm/W	>80Ra	Φ244xH84.5mm	Φ195-210mm

LED DOWN LIGHTS



ODF

- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato.
 - Garanzia: 3 anni
- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato.
 - Garanzia: 3 anni

220V
240V

50/60Hz

90°

IK03

IK06

PF ≥0.9

Recessed

CE

RoHS


ErP

CB

Indoor

IP20

L70 to 45000hrs

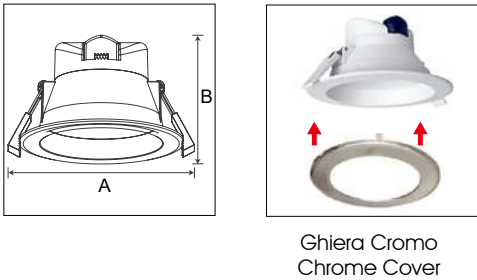

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
ODF10-WW	Bianco White	3000K	10W	70mA	820lm	90lm/W	>80Ra	Φ113xH72.5mm	Φ90-102mm
ODF10-NW		4000K	10W	70mA	900lm				
ODF14-WW	Bianco White	3000K	14W	100mA	1200lm	93lm/W	>80Ra	Φ145xH75mm	Φ120-130mm
ODF14-NW		4000K	14W	100mA	1300lm				
ODF17-WW	Bianco White	3000K	17W	130mA	1500lm	94lm/W	>80Ra	Φ174xH78.5mm	Φ145-155mm
ODF17-NW		4000K	17W	130mA	1600lm				
ODF25-WW	Bianco White	3000K	25W	180mA	2230lm	94lm/W	>80Ra	Φ244xH94.5mm	Φ195-210mm
ODF25-NW		4000K	25W	180mA	2350lm				

CYCLONE

Series



LED DOWN LIGHTS



CYCLONE

- Anello e corpo in alluminio verniciato bianco.
- Driver esterno ON / OFF incluso.
- Per opzione: driver dimmerabile, kit emergenza.
- Garanzia: 3 anni
- Ring and body in white painted aluminum.
- External ON / OFF driver included.
- For option: dimmable driver, emergency kit.
- Warranty: 3 years

220V
~
240V
50/60Hz

90°

IK07

AVAILABLE

WW NW CW

PF

≥0.9

Recessed

CE

RoHS


ErP

CB

Indoor

IP20

L70 to 45000hrs



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
ODF40-WW	Bianco White	3000K	40W	1050mA	3600lm	100lm/W	>80Ra	Φ279xH94mm	Φ240-255mm
ODF40-NW		4000K	40W	1050mA	3880lm				



CRISTAL

Series

Adjustable spring



- ✓ Super aluminum
- ✓ Brand driver
- ✓ Imported LED source
- ✓ Precise light control
- ✓ Top process
- ✓ Authorized certification
- ✓ Efficient and energy saving
- ✓ Soft light to protect eyes
- ✓ Bright and uniform
- ✓ Durable in use



+



Multi-option for cover shape and cover color

+



Drop glass version



LED DOWN LIGHTS



CRISTAL

- Anello e corpo in alluminio verniciato bianco.
 - Driver esterno ON / OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Garanzia: 5 anni
- Ring and body in white painted aluminum.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 5 years

220V
240V

50/60Hz

90°

LED SDCM<6

AVAILABLE
WW NW CW

PF ≥0.9

Recessed


CE

RoHS

Indoor

IP20

L70 to 45000hrs

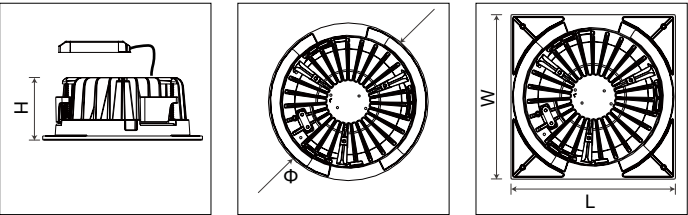

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
LD386R-WW	Bianco White	3000K	29W	700mA	2450lm	90lm/W	>80Ra	Φ195xH78mm	Φ170mm
LD386R-NW		4000K	29W	700mA	2600lm				
LD388R-WW	Bianco White	3000K	38W	900mA	3200lm	90lm/W	>80Ra	Φ230xH86mm	Φ200mm
LD388R-NW		4000K	38W	900mA	3400lm				

LED DOWN LIGHTS



CRISTAL

- Anello e corpo in alluminio verniciato bianco.
 - Driver esterno ON / OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Garanzia: 5 anni
- Ring and body in white painted aluminum.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 5 years

220V
240V

50/60Hz

60°

LED SDCM<6

AVAILABLE
WW NW CW

LED COB

PF ≥0.9

Recessed


CE

RoHS

Indoor

IP20

L70 to 45000hrs

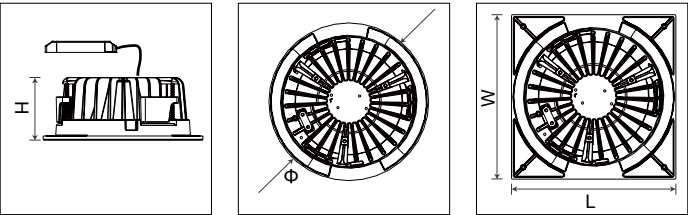




Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
LD486R-WW	Bianco White	3000K	30W	800mA	2530lm	90lm/W	>80Ra	Φ195xH78mm	Φ170mm
LD486R-NW		4000K	30W	800mA	2680lm				
LD488R-WW	Bianco White	3000K	40W	1200mA	3380lm	90lm/W	>80Ra	Φ230xH86mm	Φ200mm
LD488R-NW		4000K	40W	1200mA	3580lm				

LED DOWN LIGHTS




ATOM


- Anello in alluminio verniciato bianco.
- Dissipatore in alluminio verniciato bianco.
- LED COB ad alta efficienza e alta resa cromatica CRI>90.
- Gruppo ottico orientabile di 340° e basculante di 45°.
- Riflettore con ottica speculare sfaccettata.
- Installazione e regolazione semplice.
- Driver esterno ON / OFF incluso.
- Per opzione: Driver dimmerabile, kit emergenza.
- Garanzia: 5 anni
- White painted aluminum ring.
- White painted aluminum heatsink.
- COB LED with high efficiency and high color rendering CRI> 90.
- Optical unit 340 ° adjustable and 45° tilting.
- Reflector with faceted specular optic.
- Simple installation and adjustment.
- External ON / OFF driver included.
- For option: dimmable driver, emergency kit.
- Warranty: 5 years

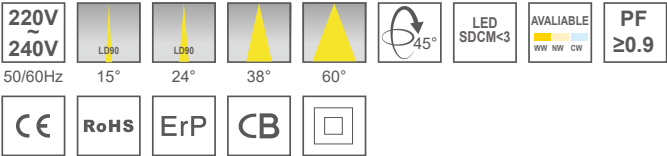


LD90



LD125



LD145



LD170



BRIDGELUX

CRI >90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
LD90K3	Bianco White	3000K	15W	350mA	1280lm	85lm/W	>90Ra	Φ105mm	Φ90mm
LD90K4		4000K	15W	350mA	1315lm				
LD125K3	Bianco White	3000K	28W	700mA	2000lm	85lm/W	>90Ra	Φ140mm	Φ125mm
LD125K4		4000K	28W	700mA	2100lm				
LD145K3	Bianco White	3000K	38W	900mA	2400lm	70lm/W	>90Ra	Φ158mm	Φ140mm
LD145K4		4000K	38W	900mA	2600lm				
LD170K3	Bianco White	3000K	40W	1050mA	2960lm	78lm/W	>90Ra	Φ188mm	Φ170mm
LD170K3		4000K	40W	1050mA	3100lm				
LD90K3-N	Nero Black	3000K	15W	350mA	1280lm	85lm/W	>90Ra	Φ105mm	Φ90mm
LD90K4-N		4000K	15W	350mA	1315lm				
LD125K3-N	Nero Black	3000K	28W	700mA	2000lm	85lm/W	>90Ra	Φ140mm	Φ125mm
LD125K4-N		4000K	28W	700mA	2100lm				
LD145K3-N	Nero Black	3000K	38W	900mA	2400lm	70lm/W	>90Ra	Φ158mm	Φ140mm
LD145K4-N		4000K	38W	900mA	2600lm				
LD170K3-N	Nero Black	3000K	40W	1050mA	2960lm	78lm/W	>90Ra	Φ188mm	Φ170mm
LD170K3-N		4000K	40W	1050mA	3100lm				


LED DOWN LIGHTS



GRID 1








GRID 2

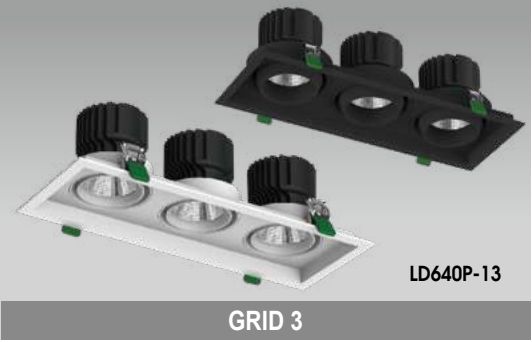

GRID 3

GRID



- Cornice in alluminio verniciato bianco per 1/2/3 faretti.
- Dissipatore in alluminio verniciato nero.
- LED COB ad alta efficienza e alta resa cromatica CRI>90.
- Gruppo ottico orientabile di 340° e basculante di 30°.
- Riflettore con ottica speculare sfaccettata a 38°, per opzione 15/24/55°.
- Installazione e regolazione semplice.
- Driver esterno ON / OFF incluso.
- Per opzione: driver dimmerabile, kit emergenza.
- Garanzia: 5 anni
- White painted aluminum frame for 1/2/3 spotlights.
- Black painted aluminum heatsink.
- COB LED with high efficiency and high color rendering CRI> 90.
- Optical unit adjustable by 340 ° and tilting by 30 °.
- Reflector with 38 ° faceted specular optic, for option 15/24/55 °.
- Simple installation and adjustment.
- External ON / OFF driver included.
- For option: dimmable driver, emergency kit.
- Warranty: 5 years



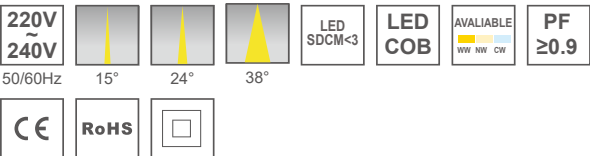


BRIDGELUX

CRI >90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
LD640P-11-WW	Bianco White	3000K	24W	600mA	2200lm	95lm/W	>90Ra	L140x140xH107mm	125x125mm
LD640P-11-NW		4000K	24W	600mA	2300lm				
LD640P-12-WW	Bianco White	3000K	2x24W	600mA	4400lm	95lm/W	>90Ra	L270x140xH107mm	255x125mm
LD640P-12-NW		4000K	2x24W	600mA	4600lm				
LD640P-13-WW	Bianco White	3000K	3x24W	600mA	6600lm	95lm/W	>90Ra	L375x140xH107mm	360x125mm
LD640P-13-NW		4000K	3x24W	600mA	6900lm				
LD640P-11-WW-N	Nero Black	3000K	24W	600mA	2200lm	95lm/W	>90Ra	L140x140xH107mm	125x125mm
LD640P-11-NW-N		4000K	24W	600mA	2300lm				
LD640P-12-WW-N	Nero Black	3000K	2x24W	600mA	4400lm	95lm/W	>90Ra	L270x140xH107mm	255x125mm
LD640P-12-NW-N		4000K	2x24W	600mA	4600lm				
LD640P-13-WW-N	Nero Black	3000K	3x24W	600mA	6600lm	95lm/W	>90Ra	L375x140xH107mm	360x125mm
LD640P-13-NW-N		4000K	3x24W	600mA	6900lm				

MODULE	HOUSING KIT	PRODUCT
	LD1011R-01  Ø68*27mm Hole Size Ø60mm	
	LD1003R-01  Ø85*52mm Hole Size Ø75mm	
LB1001R-01  Bridgelux V8 200mA 34V 9W 880-930lm Beam Angle:38°  BRIDGELUX	LD1012R-01  Ø85*30mm Hole Size Ø75mm	
LB1002R-01  Bridgelux V10B 350mA 34V 15W 1300-1400lm Beam Angle:38°  BRIDGELUX	LD1021R-01  Ø85*17mm Hole Size Ø75mm	
	LD1070R-01  Ø88*48mm Hole Size Ø75mm	
	LD1071R-01  Ø88*48mm Hole Size Ø75mm	

MODULE	HOUSING KIT	PRODUCT
LB1001R-01  Bridgelux V8 200mA 34V 9W 880-930lm Beam Angle:38°  BRIDGELUX	LD1071R-03  Ø88*48mm Hole Size Ø75mm IP54	
LB1002R-01  Bridgelux V10B 350mA 34V 15W 1300-1400lm Beam Angle:38°  BRIDGELUX	LD1071S-03  88*88*48mm Hole Size 75*75mm IP54	
	LD1089R-01  Ø88*47mm Hole Size Ø75mm	
MODULE	HOUSING KIT	PRODUCT
LB1005R-01  Bridgelux V13V 900mA 34V 38W (3400-3600lm) 1050mA 34V 42W (3750-4080lm)  BRIDGELUX	LD1008R-01  Ø165*86mm Hole Size Ø150mm	



Surface mounted




Wall mounted



Suspension



Track installed

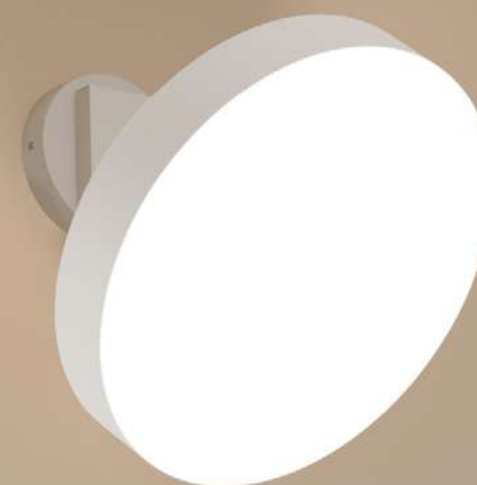

Wall mounted

SUNFLOWER

Series

LED CEILING LIGHTS



SUNFLOWER

- Corpo in alluminio and in PC plastica
 - Classificazione V-0.
 - Garanzia: 3 anni
- Aluminum and PC plastic housing
 - V-0 classification.
 - Warranty: 3 years

220V
240V

50/60Hz

110°

DIP SWITCH
3 IN 1

PIR
SENSOR

DUAL
POWER

PF
≥0.9

Surface

Wall
Mounted

Track

Suspended

CE

RoHS

ErP

CB

Indoor

IP54

L70 to
45000hrs

A

B

- SENSOR
- EMERGENCY
- SENSOR & EMERGENCY
- Dual Power
- IP54

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
C19360	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	13W	90mA	1625lm	125lm/W	>80Ra	Φ360x72mm
C19360-E (EMERGENCY)			18W	130mA	2160lm	120lm/W		
C19360-S (SENSOR)								
C19360-SE (SENSOR + EMERGENCY)								
C19410	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	22W	160mA	2640lm	120m/W	>80Ra	Φ410x76mm
C19410-E (EMERGENCY)			32W	240mA	3680lm	115lm/W		
C19410-S (SENSOR)								
C19410-SE (SENSOR + EMERGENCY)								
C19360.N	Nero Black	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	13W	90mA	1625lm	125lm/W	>80Ra	Φ360x72mm
C19360-E.N (EMERGENCY)			18W	130mA	2160lm	120lm/W		
C19360-S.N (SENSOR)								
C19360-SE.N (SENSOR + EMERGENCY)								
C19410.N	Nero Black	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	22W	160mA	2640lm	120m/W	>80Ra	Φ410x76mm
C19410-E.N (EMERGENCY)			32W	240mA	3680lm	115lm/W		
C19410-S.N (SENSOR)								
C19410-SE.N (SENSOR + EMERGENCY)								





LED CEILING LIGHTS



GLORIA

- Corpo in alluminio and in PC plastica
- Classificazione V-0.
- Garanzia: 3 anni
- Aluminum and PC plastic housing
- V-0 classification.
- Warranty: 3 years


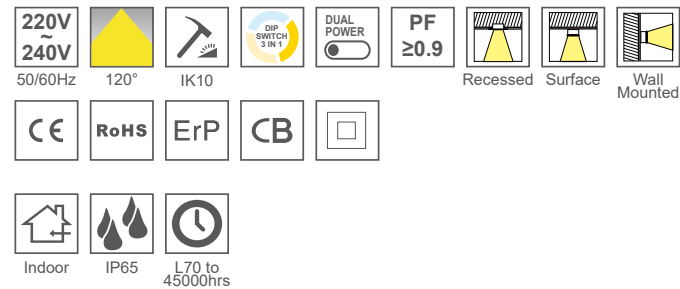


LED CEILING LIGHTS



GLORIA

- Corpo in alluminio and in PC plastica
- Classificazione V-0.
- Garanzia: 3 anni
- Aluminum and PC plastic housing
- V-0 classification.
- Warranty: 3 years

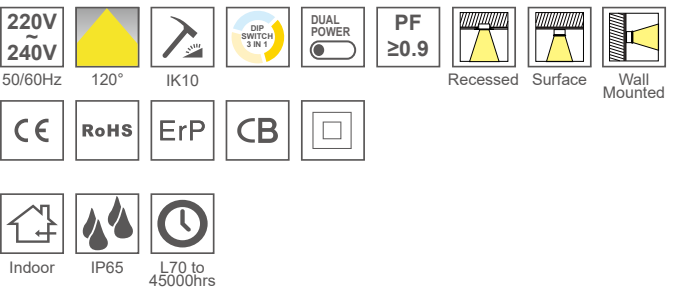

IK10 Dual Power IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
C7022-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	10W	110mA	1055lm	105lm/W	>80Ra	220x220x50mm
			15W	110mA	1568lm			
C7028-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	13W	130mA	1482lm	114lm/W	>80Ra	280x280x50mm
			18W	130mA	2052lm			
C7033-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	17W	180mA	2019lm	118lm/W	>80Ra	330x330x50mm
			24W	180mA	2850lm			

SENSOR IK10 Dual Power IP65

C7022-S	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	10W	110mA	1055lm	105lm/W	>80Ra	220x220x50mm
			15W	110mA	1568lm			
C7028-S	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	13W	130mA	1482lm	114lm/W	>80Ra	280x280x50mm
			18W	130mA	2052lm			
C7033-S	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	17W	180mA	2019lm	118lm/W	>80Ra	330x330x50mm
			24W	180mA	2850lm			

IK10 Dual Power IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
C7220-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	10W	110mA	1055lm	105lm/W	>80Ra	Φ220x50mm
			15W	110mA	1568lm			
C7280-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	13W	130mA	1482lm	114lm/W	>80Ra	Φ280x50mm
			18W	130mA	2052lm			
C7330-A	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	17W	180mA	2019lm	118lm/W	>80Ra	Φ330x50mm
			24W	180mA	2850lm			

SENSOR IK10 Dual Power IP65

C7220-S	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	10W	110mA	1055lm	105lm/W	>80Ra	Φ220x50mm
			15W	110mA	1568lm			
C7280-S	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	13W	130mA	1482lm	114lm/W	>80Ra	Φ280x50mm
			18W	130mA	2052lm			
C7330-S	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	17W	180mA	2019lm	118lm/W	>80Ra	Φ330x50mm
			24W	180mA	2850lm			

RAINBOW Series

DIP SWITCH 3 IN 1
3000K, 4000K, 5700K


CD0180-AM-TW-DP



CD2222-AM-TW-DP






CD0220-AM-TW-DP

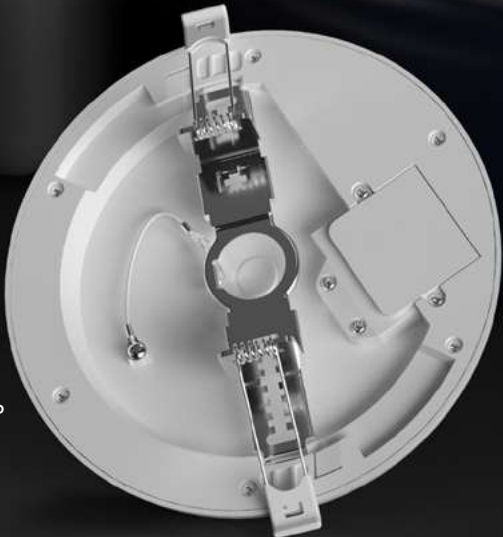

LED CEILING LIGHTS

RAINBOW

- Corpo in plastica termoconduttiva.
- Classificazione V-0.
- Schermo in PC.
- Driver incorporato no flickering.
- Installabile ad incasso o a plafone.
- Garanzia: 3 anni.
- Thermally conductive plastic body.
- V-0 classification.
- PC screen.Built-in driver no flickering.
- Can be recessed or ceiling mounted.
- Warranty: 3 years

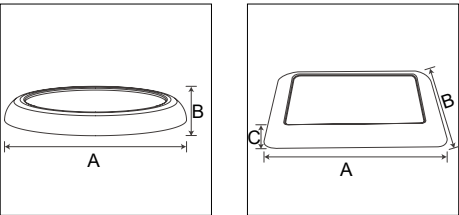

Dual Power IP44

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
CD0180-AM-TW-DP	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	8W	60mA	680lm	85lm/W	>80Ra	Φ180xH20.5mm	Φ80-160mm
			12W	90mA	960lm	80lm/W			
CD0220-AM-TW-DP	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	12W	90mA	1200lm	100lm/W	>80Ra	Φ220xH21.5mm	Φ120-200mm
			18W	140mA	1710lm	95lm/W			
CD0300-AM-TW-DP	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	18W	140mA	1890lm	105lm/W	>80Ra	Φ300xH25mm	Φ150-270mm
			25W	200mA	2375lm	95lm/W			

Dual Power IP44

CD1818-AM-TW-DP	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	8W	60mA	680lm	85lm/W	>80Ra	180x180xH20.5mm	Φ80-160mm
			12W	90mA	960lm	80lm/W			
CD2222-AM-TW-DP	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	12W	90mA	1200lm	100lm/W	>80Ra	220x220xH21.5mm	Φ120-200mm
			18W	140mA	1710lm	95lm/W			
CD3030-AM-TW-DP	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	18W	140mA	1800lm	100lm/W	>80Ra	300x300xH25mm	Φ180-270mm
			25W	200mA	2375lm	95lm/W			

LED CEILING LIGHTS



ESSENZA

- Driver integrato, non flicker
 - 3000K / 4000K / 6000K selezionabili
 - Montaggio ad incasso ed a plafone
 - Non dimmerabile, funzione di emergenza non disponibile
 - Magnete incorporato per una facile sostituzione dell'anello
 - Garanzia: 3 anni
- Driver Built-in, integrated design, non flicker
 - 3000K/4000K/6000K selectable
 - For both recessed mounting and surface mounting
 - Non Dimmable, emergency function non available
 - Magnet built-in for easy ring changing
 - Warranty: 3 years

175V
265V
50/60Hz

120°

DIP SWITCH 3 IN 1

PF ≥0.9

Recessed

Surface

CE

RoHS


ErP

CB

Indoor

IP20


L70 to 45000hrs

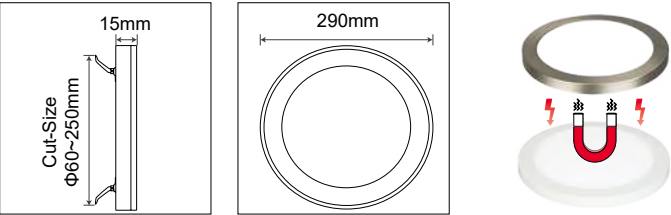

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
AR6WCCT3	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	6W	70mA	600lm	80-90lm/W	>80Ra	Φ139xH15mm	Φ55-100mm
AR12WCCT3			12W	100mA	1200lm	80-90lm/W	>80Ra	Φ164xH15mm	Φ55-125mm
AR18WCCT3			18W	130mA	1800lm	80-90lm/W	>80Ra	Φ217xH15mm	Φ55-175mm
AR24WCCT3			24W	180mA	2400lm	80-90lm/W	>80Ra	Φ290xH15mm	Φ60-250mm



COLORFUL RING EASY TO REMOVE AND CHANGE


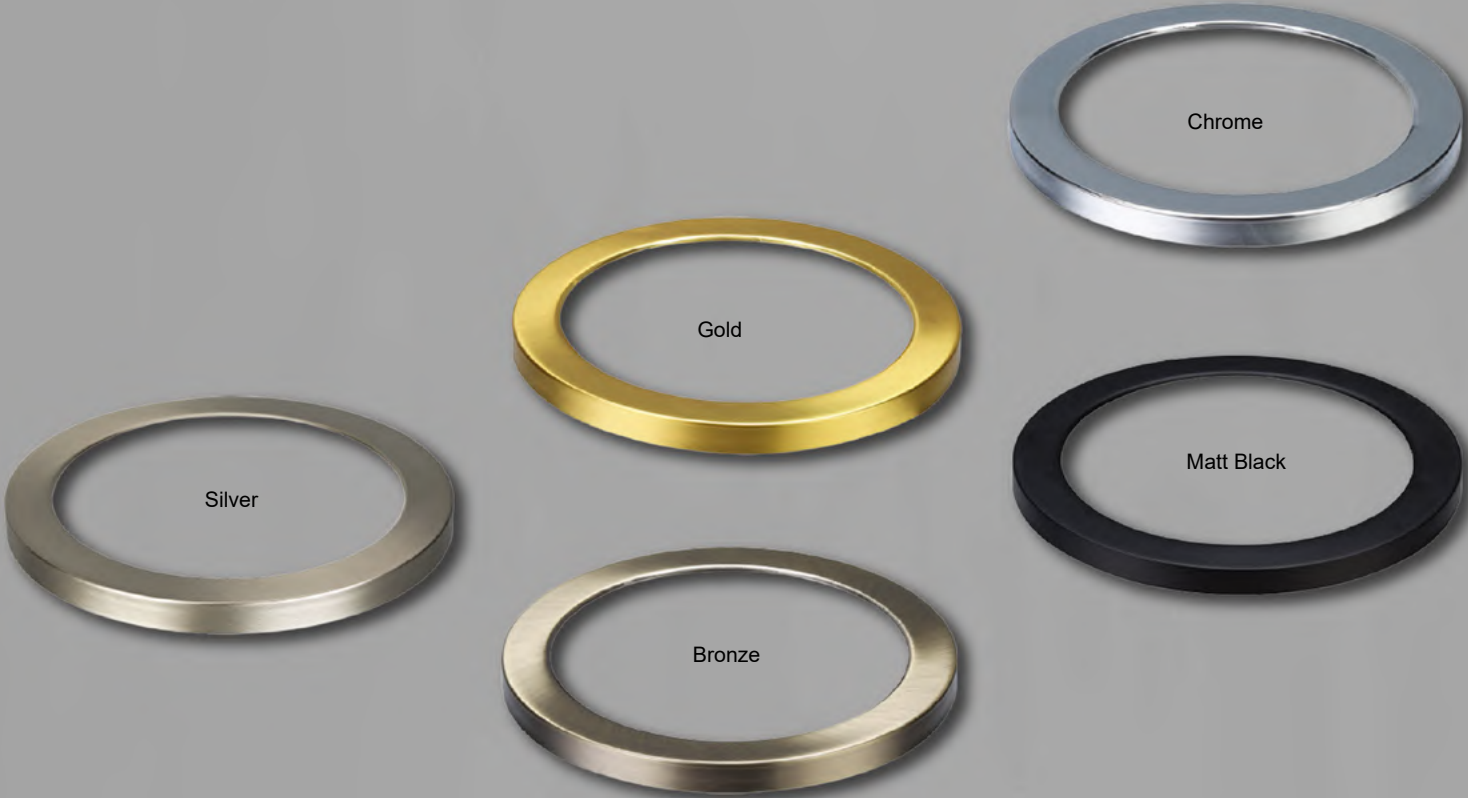


LED CEILING LIGHTS



MIRAGE

- Corpo in metallo con verniciatura a forno, finitura lucida.
 - Installazione semplice.
 - Lunghezza del cavo regolabile.
 - Assenza di sfarfallio.
 - Garanzia: 2 anni
- Metal body with oven painted, glossy finish
 - Simple installation.
 - Adjustable cable length.
 - Absence of flicker.
 - Warranty: 2 years

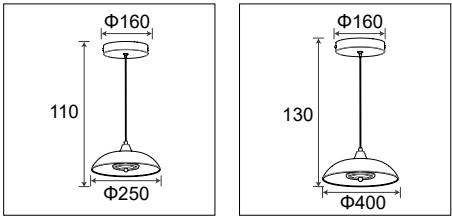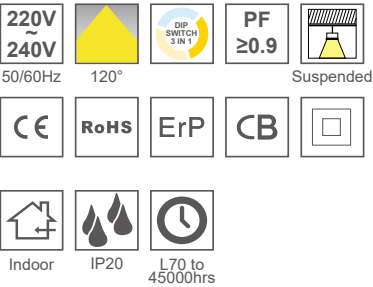

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
PDR09250A	Bianco White	 DIP SWITCH 3 IN 1 2700K, 3200K, 4000K	15W	110mA	950lm	63lm/W	>80Ra	Φ250x110xΦ160mm
PDR09400A	Bianco White	 DIP SWITCH 3 IN 1 2700K, 3200K, 4000K	30W	220mA	1850lm	62lm/W	>80Ra	Φ400x130xΦ160mm
PDR09250B	Nero Black	 DIP SWITCH 3 IN 1 2700K, 3200K, 4000K	15W	110mA	950lm	63lm/W	>80Ra	Φ250x110xΦ160mm
PDR09400B	Nero Black	 DIP SWITCH 3 IN 1 2700K, 3200K, 4000K	30W	220mA	1850lm	62lm/W	>80Ra	Φ400x130xΦ160mm



LED CEILING LIGHTS



BLOSSOM

- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Cilindro/parallelepipedo esterno in PC.
 - Classificazione V-2
 - Riflettore lucido sfaccettato, orientabile e basculante fino a 30°.
 - Ottica 24 o 36° per opzione.
 - Driver integrato.
 - Installazione a plafone senza viti a vista.
 - Garanzia: 3 anni
- Aluminum body covered in thermo-conductive plastic.
 - External cylinder / parallelepiped in PC.
 - V-2 classification.
 - Glossy faceted reflector, adjustable and tilting up to 30 °.
 - Optics 24 or 36 ° for option.
 - Integrated driver.
 - Ceiling-mounted installation without visible screws.
 - Warranty: 3 years

220V
240V
50/60Hz

AVAILABLE

WW NW CW

PF
≥0.9


CE

RoHS

Indoor

IP20

L70 to 45000hrs

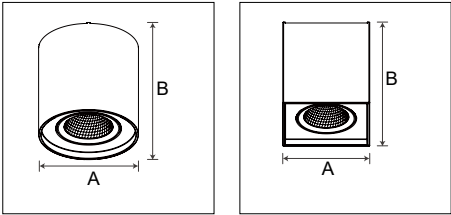

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
D12090-A-WW	Bianco White	3000K	10W	130mA	920lm	92lm/W	>80Ra	Φ110x111mm
D12090-A-NW		4000K						
D12090-B-WW	Bianco White	3000K	10W	130mA	920lm	92lm/W	>80Ra	104x104x111mm
D12090-B-NW		4000K						

LED CEILING LIGHTS



AMBER

- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Cilindro/parallelepipedo esterno in PC.
 - Classificazione V-2
 - Ottica 60° o 40° per opzione.
 - Driver integrato.
 - Installazione a plafone senza viti a vista.
 - Garanzia: 5 anni
- Aluminum body covered in thermo-conductive plastic.
 - External cylinder / parallelepiped in PC.
 - V-2 classification.
 - Optics 60° or 40° for option.
 - Integrated driver.
 - Ceiling-mounted installation without visible screws.
 - Warranty: 5 years

220V
240V
50/60Hz

DIP SWITCH 3 IN 1

3000K 4000K 5700K

PF
≥0.9


CE

RoHS

Indoor

IP65

L70 to 45000hrs



UGR <19 IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
C20090-14W	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	14W	350mA	1610lm	115lm/W	>80Ra	Φ86x125mm
C20140-28W	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	28W	700mA	3220lm	115lm/W	>80Ra	Φ136x145mm
C20185-40W	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	40W	1000mA	4800lm	120lm/W	>80Ra	Φ184x164mm
C20185-50W	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 5700K	50W	1250mA	6000lm	120lm/W	>80Ra	Φ184x164mm

LED LINEAR LIGHT

■ PRESTAZIONI / PERFORMANCE

Elementi lineari dalle linee sobrie ed eleganti, ideali per essere utilizzati sia come lampada singola che come sistema componibile.

Realizzati in alluminio naturale.

Emissione luminosa diretta o diretta/indiretta con diffusori opali o schermo lamellare cromato.

Disponibili ampie gamme di accessori per la composizione e l'installazione dei prodotti.

Linear elements with sober and elegant lines, ideal to be used both as a single lamp and as a modular system.

Made of natural aluminum.

Direct or direct / indirect light emission with opal diffusers or chromed lamellar screen.

Wide ranges of accessories available for the composition and installation of products.





FASHION

Series

LED LINEAR LIGHT FASHION SERIES

FASHION

- Corpo in alluminio non verniciato, testate di chiusura in PC.
- Diffusore in PC opale.
- Driver isolato incorporato.
- Già predisposto per il cablaggio passante.
- Disponibili accessori per la sospensione, attacco a soffitto, giunto interno lineare.
- Garanzia: 5 anni
- Unpainted aluminum body, PC end caps. Diffuser in opal PC.
- Built-in isolated driver. Already prepared for pass-through wiring.
- Accessories for suspension, ceiling attachment, internal linear joint available.
- Warranty: 5 years

220V
240V
50/60Hz

AVAILABLE

WW NW CW

PF

≥0.9

Surface

Suspended

CE

RoHS


ErP

CB

Indoor

IP20

L70 to 45000hrs



KIT1-1201AS

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
L0601-AS WW	Argento Silver	3000K	20W	700mA	2000lm	100lm/W	>90Ra	L614x64xH75mm
L0601-AS NW		4000K	20W	700mA	2000lm			
L1201-AS WW	Argento Silver	3000K	40W	1050mA	4000lm	100lm/W	>90Ra	L1217x64xH75mm
L1201-AS NW		4000K	40W	1050mA	4000lm			

LED LINEAR LIGHT



BLOCK

- Corpo in alluminio non verniciato, testate di chiusura in PC.
- Doppia emissione 70% verso il basso e 30% verso l'alto.
- Diffusori in PC opale.
- Driver isolato incorporato.
- Già predisposto per il cablaggio passante.
- Disponibili accessori per la sospensione, attacco a soffitto, giunto interno lineare, giunti esterni per composizioni a 2,3,4 vie.
- Garanzia: 5 anni
- Unpainted aluminum body, PC end caps.
- Double emission 70% downwards and 30% upwards.
- Diffusers in opal PC.
- Built-in isolated driver.
- Already prepared for pass-through wiring.
- Available accessories for suspension, ceiling attachment, internal linear joint, external joints for 2,3,4-way compositions.
- Warranty: 5 years

220V
240V

50/60Hz

110°

DIP SWITCH 3 IN 1

PF ≥0.9

Suspended

CE

RoHS

ErP


CB

Indoor

IP20


L70 to 45000hrs

Accessories



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
L1203-DA-TW	Argento Silver	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	48W	1200mA	4800lm	100lm/W	>80Ra	L1130xW50xH76mm

LED LINEAR LIGHT

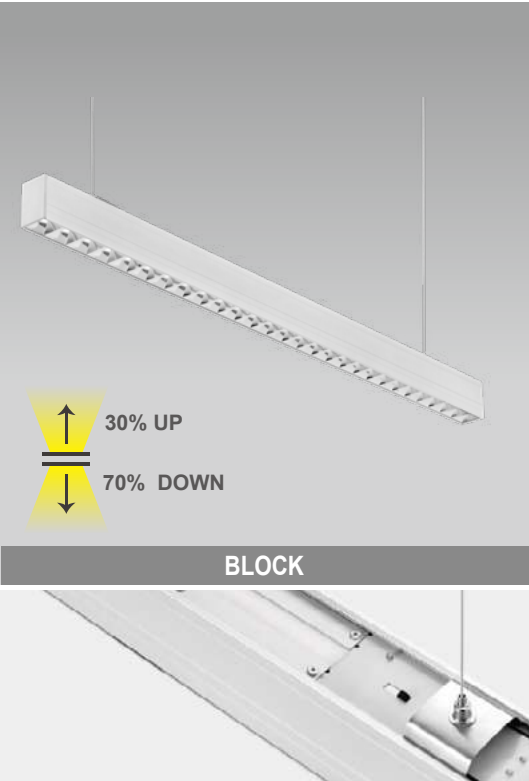

BLOCK

- Corpo in alluminio non verniciato, testate di chiusura in PC.
- Doppia emissione 70% verso il basso e 30% verso l'alto.
- Diffusori superiori in PC opale.
- Schermo inferiore lamellare cromato dark light.
- Driver isolato incorporato.
- Già predisposto per il cablaggio passante.
- Disponibili accessori per la sospensione, attacco a soffitto, giunto interno lineare, giunti esterni per composizioni a 2,3,4 vie.
- Garanzia: 5 anni
- Unpainted aluminum body, PC end caps.
- Double emission 70% downwards and 30% upwards.
- Upper diffusers in opal PC.
- Dark light chromed lamellar lower screen.
- Built-in isolated driver.
- Already prepared for pass-through wiring.
- Available accessories for suspension, ceiling attachment, internal linear joint, external joints for 2,3,4-way compositions.
- Warranty: 5 years

220V
240V

50/60Hz

110°

DIP SWITCH 3 IN 1

PF ≥0.9

Suspended

CE

RoHS

ErP


CB

Indoor

IP20

L70 to 45000hrs

Accessories



UGR <19

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
L1203-DR-TW	Argento Silver	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	48W	1200mA	5280lm	110lm/W	>80Ra	L1130xW50xH76mm



DURALINE

Series



DURALINE

- Corpo stampato ad iniezione, in policarbonato autoestinguente di colore grigio, di elevata resistenza meccanica.
- Diffusore stampato ad iniezione in policarbonato opale autoestinguente V2, finitura esterna liscia.
- Connettore rapido maschio/femmina per il collegamento alla linea di alimentazione.
- Fattore di potenza > 0.9.
- Versione in emergenza disponibile.
- Garanzia: 5 anni
- Injection molded body in self-extinguishing gray polycarbonate with high mechanical resistance.
- Injection molded diffuser in self-extinguishing V2 opal polycarbonate, smooth external finish.
- Male / female quick connector for connection to the power supply line.
- Power factor> 0.9.
- Emergency version available.
- Warranty: 5 years

220V
240V
50/60Hz

 112°

 IK08



PF
≥0.9



Surface

CE

RoHS

ErP

CB




 Indoor

 Outdoor

 IP65

 L70 to 45000hrs

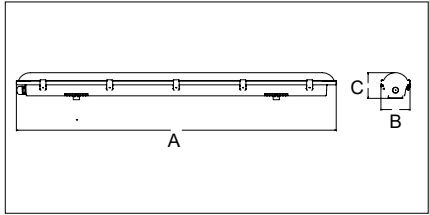

IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TRP-060C-TW	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	20W	200mA	2400lm	120lm/W	>80Ra	660x80x72mm
TRP-120C-TW	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	40W	200mA	4800lm	120lm/W	>80Ra	1200x80x72mm
TRP-150C-TW	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	60W	200mA	7200lm	120lm/W	>80Ra	1500x80x72mm

LED PANEL LIGHTS

Progettati per l'illuminazione di uffici, hotel, sale meeting, ambienti con video terminali e in generale per tutti gli ambienti che necessitano di un'illuminazione omogenea e costante nel tempo.

Una soluzione semplice per disporre della tecnologia più aggiornata in tema di illuminazione d'interni.

Cura nell'assemblaggio (giunzione dei profili assolutamente invisibile), omogeneità di luminanza dei diffusori, ottima resa luminosa, resa cromatica eccellente, uniformità di colore dei lotti di fornitura anche a distanza nel tempo, fanno di questa serie un prodotto eccellente.

La gamma copre tutte le necessità dimensionali e una completa serie di accessori ne consentono l'utilizzo in ogni tipo di installazione.

Designed for the lighting of offices, hotels, meeting rooms, environments with video terminals and in general for all environments that require homogeneous and constant lighting over time.

A simple solution to have the most up-to-date technology in interior lighting.

Care in assembly (junction of the profiles absolutely invisible), homogeneity of luminance of the diffusers, excellent light output, excellent color rendering, color uniformity of the supply batches even at a distance over time, make this series an excellent product.

The range covers all dimensional needs and a complete series of accessories allow it to be used in any type of installation.

IBIS Series

with edge-lit led emitting technology.
Extrusion aluminum round frame,good for heat
dissipation.

- Designed with stylish and fashionable
lamp body

70% DOWN



Uniform and smooth light beam,low glare.

LED PANEL LIGHT




IBIS

- Doppia emissione 70% verso il basso e 30% verso il basso.
- Cornice in alluminio verniciata bianca,nessuno spazio di giunzione.
- Kit sospensione incluso.
- Driver ON/OFF incluso.
- Per opzione: driver dimmerabile, kit emergenza.
- Schermo microprismatizzato per un eccellente controllo della luce.
- Garanzia: 3 anni
- Double emission 70% downwards and 30% downwards.
- White painted aluminum frame, no joint space.
- Suspension kit included.
- ON / OFF driver included.
- For option: dimmable driver, emergency kit.
- Micro prismatic screen for excellent light control.
- Warranty: 3 years

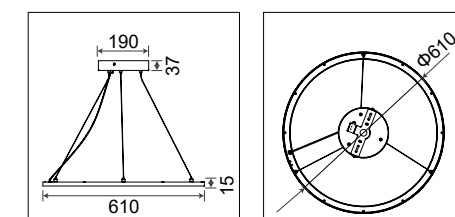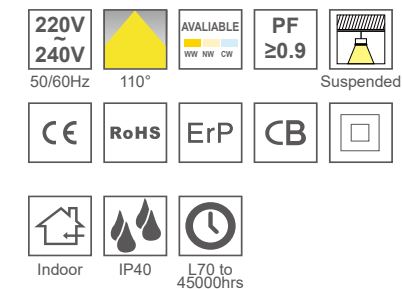

UGR <19

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
P0610-DTMH-WW	Bianco White	3000K	50W	1050mA	4930lm	98lm/W	>80Ra	Φ610x15mm
P0610-DTMH-NW		4000K	50W	1050mA	5400lm	106lm/W		

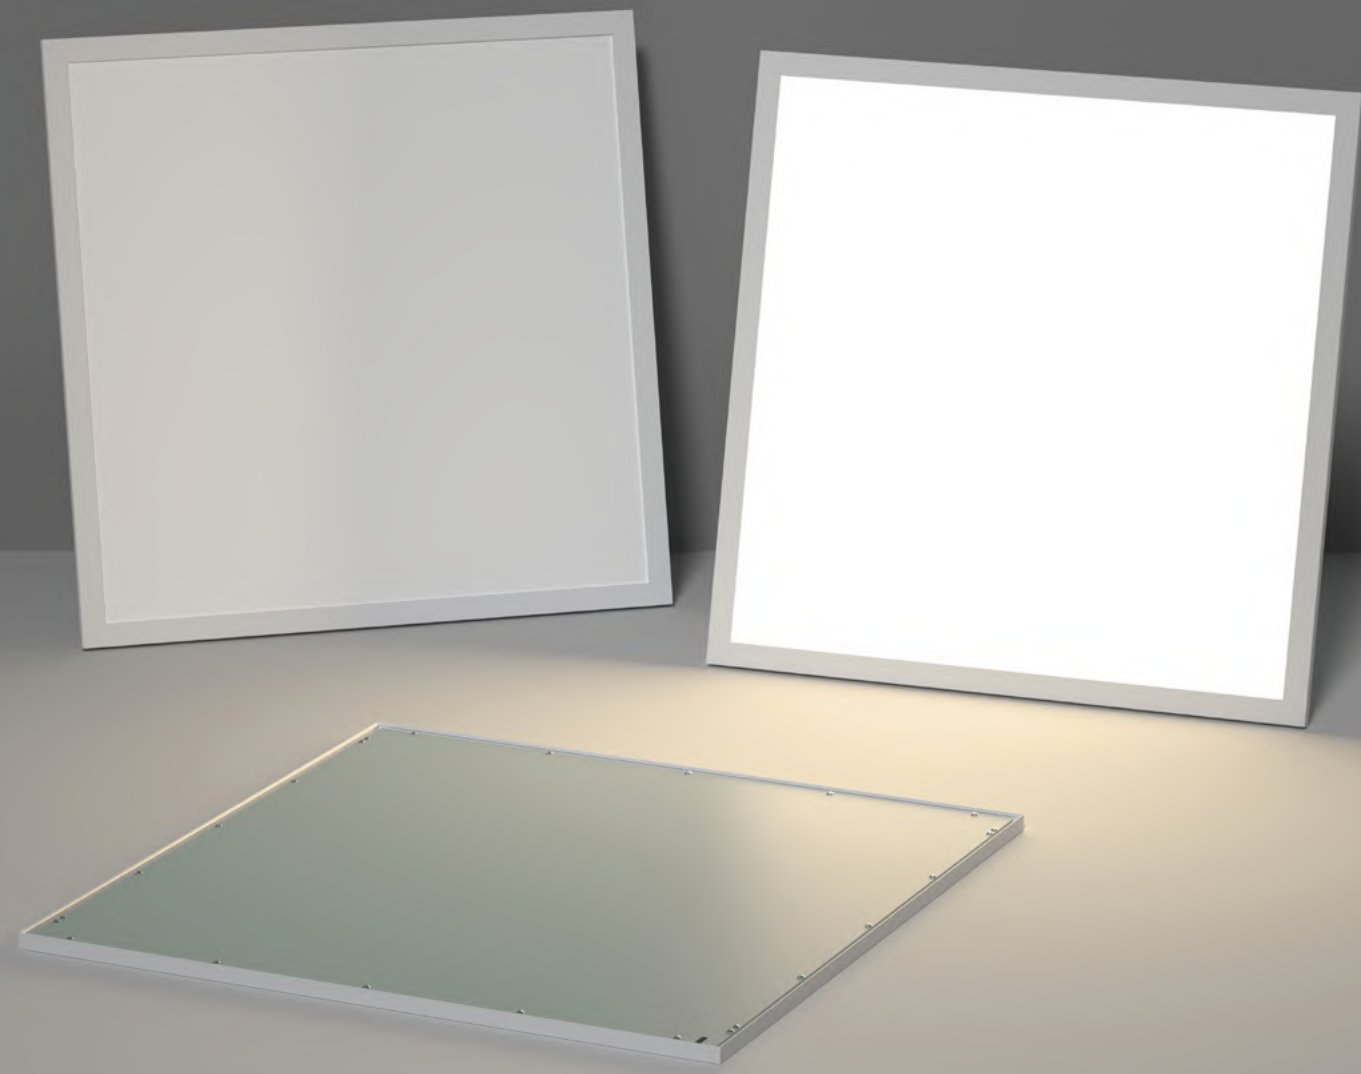

LED PANEL LIGHTS

LED PANEL LIGHT



SWAN

- Cornice in alluminio verniciata bianca, nessuno spazio di giunzione.
 - Driver ON/OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Schermo in PC con distribuzione diffondente.
 - Garanzia: 3 anni
 - L93/B10:30000h L90/B10:50000h
 - L80/B10:80000h L75/B10:100000h
- White painted aluminum frame, no joint space.
 - ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - PC screen with wide distribution.
 - Warranty: 3 years
 - L93/B10:30000h L90/B10:50000h
 - L80/B10:80000h L75/B10:100000h

220V
240V
50/60Hz

120°

AVAILABLE
WW NW CW

PF
≥0.9

Surface

Suspended

Recessed

CE


RoHS

ErP

CB

Indoor

IP54



UGR <19 100⁺lm/W CRI >90 IP54 Front Side

P6060BLHU-WW-40	Bianco White	3000K	40W	1000mA	3605lm	100lm/W	>90Ra	595x1195x33mm
P6060BLHU-NW-40		4000K	40W	1000mA	3880lm			
P3120BLHU-WW-40	Bianco White	3000K	40W	1000mA	3605lm	100lm/W	>90Ra	295x1195x33mm
P3120BLHU-NW-40		4000K	40W	1000mA	3880lm			

LED PANEL LIGHT



FAIRY

- Cornice in alluminio verniciata bianca, nessuno spazio di giunzione.
 - Driver ON/OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Schermo in PC con distribuzione diffondente.
 - Garanzia: 3 anni
- White painted aluminum frame, no joint space.
 - ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - PC screen with wide distribution.
 - Warranty: 3 years

220V
~
240V

50/60Hz

AVAILABLE

WW NW CW

PF

≥0.9


CE

RoHS

ErP

CB

IP20

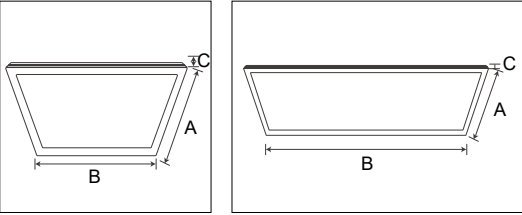

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
P3030-WW	Bianco White	3000K	12W	350mA	900lm	100lm/W	>80Ra	295x295x10mm
P3030-NW		4000K	12W	350mA	960lm			
P3060-WW	Bianco White	3000K	18W	450mA	1520lm	100lm/W	>80Ra	295x595x10mm
P3060-NW		4000K	18W	450mA	1620lm			
P6120-WW	Bianco White	3000K	48W	1200mA	4470lm	100lm/W	>80Ra	595x1195x10mm
P6120-NW		4000K	48W	1200mA	4800lm			

UGR <19

P6060HU-WW-40	Bianco White	3000K	40W	1050mA	3640lm	100lm/W	>80Ra	595x595x10mm
P6060HU-NW-40		4000K	40W	1050mA	3920lm			
P3120HU-WW	Bianco White	3000K	40W	1050mA	3640lm	100lm/W	>80Ra	295x1195x10mm
P3120HU-NW		4000K	40W	1050mA	3920lm			





Track Spot

Track Grille

Track Grille

Track Spot

Suspension

Suspension

COMBO

Series

LED TRACK LIGHTS



COMBO

La pulizia delle forme si unisce ad una completa gamma di corpi illuminanti con svariate distribuzioni luminose atte a coprire una moltitudine soluzioni illuminotecniche nell'ambito della illuminazione architettonica.

Il sistema COMBO si basa sull'utilizzo di un binario elettrificato a bassa tensione, disponibile nelle versioni da incasso / incasso con bordo nascosto / sospensione e plafone.

Al suo interno si possono inserire apparecchi lineari di lunghezza da 12cm sino a 1200cm con distribuzione luminosa diffondente oppure con apertura 25° o 40°, e potenze che vanno dai 6W sino ai 40W.

The clean lines are combined with a complete range of lighting bodies with various light distributions designed to cover a multitude of lighting solutions in the field of architectural lighting.

The COMBO system is based on the use of a low voltage electrified track, available in the recessed / recessed versions with hidden edge / suspension and ceiling.

Inside you can insert linear luminaires with a length from 12cm up to 1200cm with a diffused light distribution or with an opening of 25 ° or 40 °, and powers ranging from 6W up to 40W.



È altresì possibile utilizzare apparecchi orientabili sia lineari che a spot con potenze dai 6W ai 20W con distribuzione 25° o 40°

It is also possible to use both linear and spot adjustable luminaires with powers from 6W to 20W with 25 ° or 40 ° distribution.



A completamento della gamma anche l'impiego di uno spot a sospensione consente di integrare COMBO in ogni situazione che necessiti di soluzioni estetiche o illuminotecniche complesse.


To complete the range, the use of a suspended spot also allows COMBO to be integrated in any situation that requires complex aesthetic or lighting solutions.



Tutti gli apparecchi utilizzano LED di ultima generazione con alta resa cromatica CRI > 90 nelle temperature di colore di 2700K o 4000K. Particolare attenzione è stata posta nello studio delle ottiche per garantire un elevato confort visivo e distribuzione luminosa ottimizzata.



All the luminaires use the latest generation LEDs with high color rendering CRI> 90 in color temperatures of 2700K or 4000K. Particular attention was paid to the study of the optics to ensure high visual comfort and optimized light distribution.

LED TRACK LIGHTS

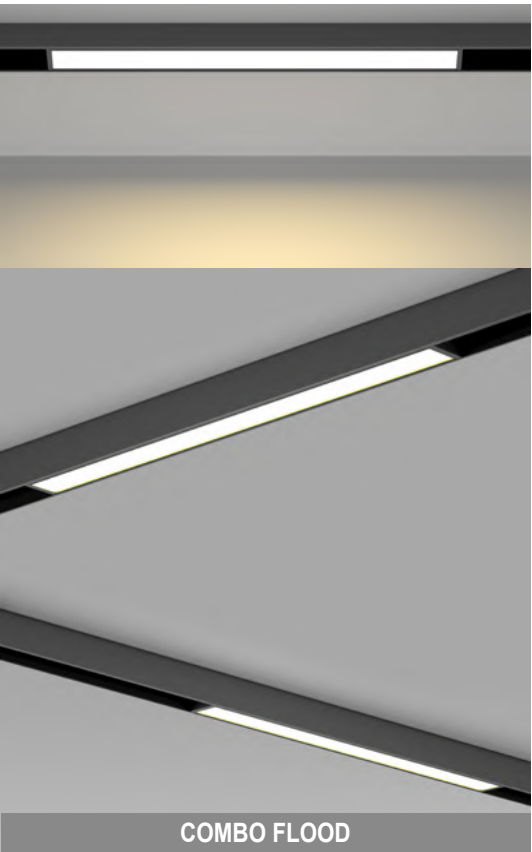

COMBO FLOOD

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza
- Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety
- Warranty: 3 years

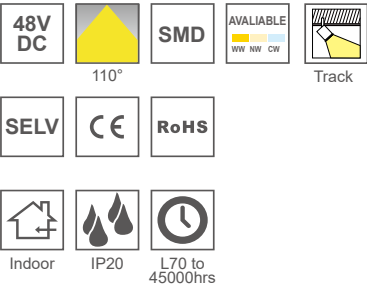

CRI > 90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TS03L300-S	Nero Black	2700K	10W	250mA	850lm	85lm/W	>90Ra	300x22x43mm
TS03L300-WW		3000K						
TS03L300-NW		4000K						
TS03L600-S	Nero Black	2700K	20W	530mA	1700lm	85lm/W	>90Ra	600x22x43mm
TS03L600-WW		3000K						
TS03L600-NW		4000K						
TS03L1200-S	Nero Black	2700K	40W	1000mA	3400lm	85lm/W	>90Ra	1200x22x43mm
TS03L1200-WW		3000K						
TS03L1200-NW		4000K						

LED TRACK LIGHTS



COMBO FOLDING GRILLE

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza
 - Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety
 - Warranty: 3 years

48V DC

24°

40°

SMD

AVAILABLE

WW NW CW

SELV


CE

RoHS

Indoor

IP20

L70 to 45000hrs




COMBO FOLDING GRILLE

UGR <19 CRI >90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TS03R06T-S	Nero Black	2700K	6W	140mA	420lm	70lm/W	>90Ra	112x23x108.5mm
TS03R06T-WW		3000K						
TS03R06T-NW		4000K						
TS03R12T-S	Nero Black	2700K	12W	280mA	840lm	70lm/W	>90Ra	220x23x108.5mm
TS03R12T-WW		3000K						
TS03R12T-NW		4000K						

LED TRACK LIGHTS

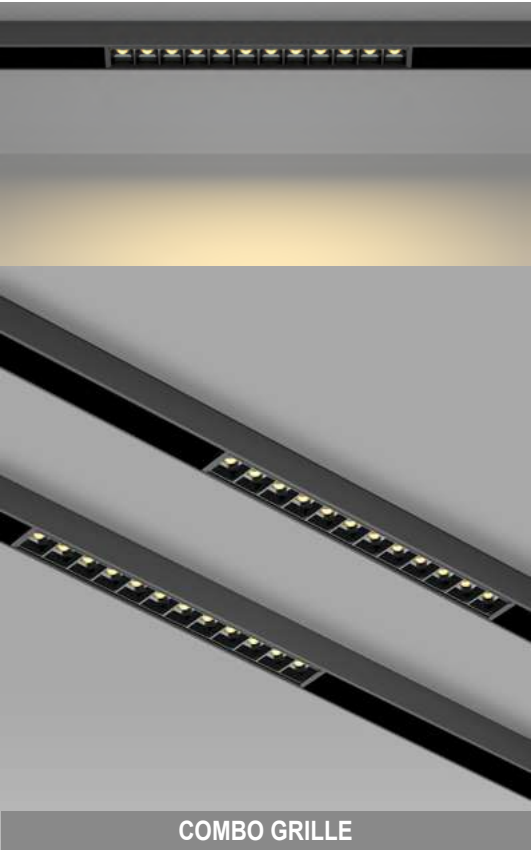

COMBO GRILLE

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza
 - Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety
 - Warranty: 3 years

48V DC

24°

40°

SMD

AVAILABLE

WW NW CW

SELV


CE

RoHS

Indoor

IP20

L70 to 45000hrs



COMBO GRILLE

UGR <19 CRI >90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TS03L06T-S	Nero Black	2700K	6W	140mA	480lm	80lm/W	>90Ra	114x22x43mm
TS03L06T-WW		3000K						
TS03L06T-NW		4000K						
TS03L12T-S	Nero Black	2700K	12W	280mA	960lm	80lm/W	>90Ra	222x22x43mm
TS03L12T-WW		3000K						
TS03L12T-NW		4000K						
TS03L18T-S	Nero Black	2700K	18W	420mA	1440lm	80lm/W	>90Ra	330x22x43mm
TS03L18T-WW		3000K						
TS03L18T-NW		4000K						

LED TRACK LIGHTS



COMBO SPOT

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza
 - Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety
 - Warranty: 3 years

48V DC

SMD

AVAILABLE

WW NW CW

Track

SELV


CE

RoHS

Indoor

IP20

L70 to 45000hrs



Optional

15°

40°

60°

LED TRACK LIGHTS



COMBO SUSPENSION

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza
 - Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety
 - Warranty: 3 years

48V DC

SMD

AVAILABLE

WW NW CW

Track

SELV


CE

RoHS

Indoor

IP20

L70 to 45000hrs



Optional

15°

40°

60°

UGR <19 CRI >90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TS03S35-S	Nero Black	2700K	6W	150mA	480lm	75lm/W	>90Ra	Φ35x80x40mm
TS03S35-WW		3000K						
TS03S35-NW		4000K						
TS03S45-S	Nero Black	2700K	10W	250mA	800lm	75lm/W	>90Ra	Φ45x100x40mm
TS03S45-WW		3000K						
TS03S45-NW		4000K						
TS03S55-S	Nero Black	2700K	15W	400mA	1500lm	95lm/W	>90Ra	Φ55x120x40mm
TS03S55-WW		3000K						
TS03S55-NW		4000K						
TS03S65-S	Nero Black	2700K	20W	530mA	2000lm	95lm/W	>90Ra	Φ65x140x40mm
TS03S65-WW		3000K						
TS03S65-NW		4000K						

UGR <19 CRI >90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TS03P01-S	Nero Black	2700K	12W	250mA	960lm	80lm/W	>90Ra	Φ40x297mm
TS03P01-WW		3000K						
TS03P01-NW		4000K						




Magnetic Track lights

48Vdc

Binario nero a plafone 48Vdc
Surface Mounted Track 48Vdc

Corrente massima: 16Amp
Tensione: 48Vdc
Materiale: Estruso in alluminio

Max Current: 16Amp
Voltage: 48Vdc
Materials: extruded aluminum



Codice / Code
TS48-BIN1M-NE
TS48-BIN2M-NE
TS48-BIN3M-NE

Lunghezza / Length
1mt
2mt
3mt




Magnetic Track lights

48Vdc

Binario nero a incasso 48Vdc
Recessed Mounted Track 48Vdc

Corrente massima: 16Amp
Tensione: 48Vdc
Materiale: Estruso in alluminio

Max Current: 16Amp
Voltage: 48Vdc
Materials: Extruded Aluminum



Codice / Code
TS48-BIN1M-INC2
TS48-BIN2M-INC2
TS48-BIN3M-INC2

Lunghezza / Length
1mt
2mt
3mt


TS48-COVER-NE

Copertura opale
Track Cover



Lunghezza: 2mt
Copertura opale per binario 48V

Length: 2mt
48Vdc Track Cover




TS48-SOSP-NE

Kit installazione a sospensione
Suspension Mounted Kit



Lunghezza Cavo: 200 cm
Materiale Cavo: acciaio inguainato
Materiale supporto: alluminio verniciato

Cable Length: 200cm
Cable Material: sheathed steel
Support Material: painted aluminum




TS48-PLAF-NE

Kit installazione a plafone
Surface Monted kit



Materiale: ferro
Dimensioni: 58x29mm

Material: Iron
Dimensions: 58x29mm




TS48-POWERCONN-NE

Connettore di alimentazione
Power Supply Connector




Corrente massima: 16Amp
Tensione: 48Vdc
Materiale: Plastica
Dimensioni: 143,7x16,2x17mm

Max Current: 16Amp
Voltage: 48Vdc
Material: Plastic
Dimensions: 143,7x16,2x17mm

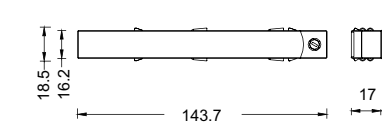


TS48-ENCAP-NE

Tappi Endcap



Materiale: Plastica

Material: Plastic




Alimentatori a scomparsa 48Vdc
Recessed Power Supply 48Vdc



Alimentazione: 220-240Vac 50/60 Hz
Tensione uscita: 48 Vdc
Fattore di potenza: ≥ 0,95
Classe di isolamento: classe II
Efficienza: ≥ 90%
Dimensioni: 268x22x44mm

Input: 220-240Vac 50/60 Hz
Output: 48Vdc
Power factor: ≥ 0,95
Insulation Class: classe II
Efficiency: ≥ 90%
Dimensions: 268x22x44mm



Codice / Code
DR-100W48N
DR-150W48N
DR-200W48N

Potenza / Power
100W
150W
200W


TS48-LIN-NE

Connessione lineare
Linear Connection



Corrente massima: 16Amp
Tensione: 48Vdc
Dimensioni: 142,8x16,2x17mm

Max Current: 16Amp
Voltage: 48Vdc
Dimensions: 142,8x16,2x17mm




TS48-LINFL-NE

Connessione flessibile
Flexible Vonnerction



Corrente massima: 16Amp
Tensione: 48Vdc
Dimensioni: 99,4x99,4mm

Max Current: 16Amp
Voltage: 48Vdc
Dimensions: 99,4x99,4mm




TS48-T-NE

Connessione a T flessibile
Flexible T Connection



Corrente massima: 16Amp
Tensione: 48Vdc
Dimensioni: 227x122mm
Materiale: plastica

Max Current: 16Amp
Voltage: 48Vdc
Dimensions: 227x122mm
Material: Plastic




TS48-L-NE

Connessione a L
L Connection




Corrente massima: 16Amp
Tensione: 48Vdc
Dimensioni: 99,4x99,4mm

Max Current: 16Amp
Voltage: 48Vdc
Dimensions: 99,4x99,4mm




TS8-L1-PLAF-NE

Connessione a L a plafone
Surface Monted L Connection Kit



Corrente massima: 16Amp
Tensione: 48Vdc
Materiale: estruso alluminio
Dimensioni: 67x67 mm

Max Current: 16Amp
Voltage: 48Vdc
Material: Extruded Aluminum
Dimensions: 67x67 mm




TS-L2-PLAF-NE

Connessione a L a plafone
Surface Mounted L Connection Kit



Corrente massima: 16Amp
Tensione: 48Vdc
Materiale: estruso alluminio
Dimensioni: 82x82 mm

Max Current: 16Amp
Voltage: 48Vdc
Material: Extruded Aluminum
Dimensions: 82x82 mm




TS48-L1-INC-NE

Connessione a L a incasso
Recessed Mounted L Connection Kit



Corrente massima: 16Amp
Tensione: 48Vdc
Materiale: estruso alluminio
Dimensioni: 67x67 mm

Max Current: 16Amp
Voltage: 48Vdc
Material: Extruded Aluminum
Dimensions: 67x67 mm




TS48-L2-INC-NE


Connessione a L a incasso
Recessed Mounted L Connection Kit



Corrente massima: 16Amp
Tensione: 48Vdc
Materiale: estruso alluminio
Dimensioni: 82x82 mm

Max Current: 16Amp
Voltage: 48Vdc
Material: Extruded Aluminum
Dimensions: 82x82 mm



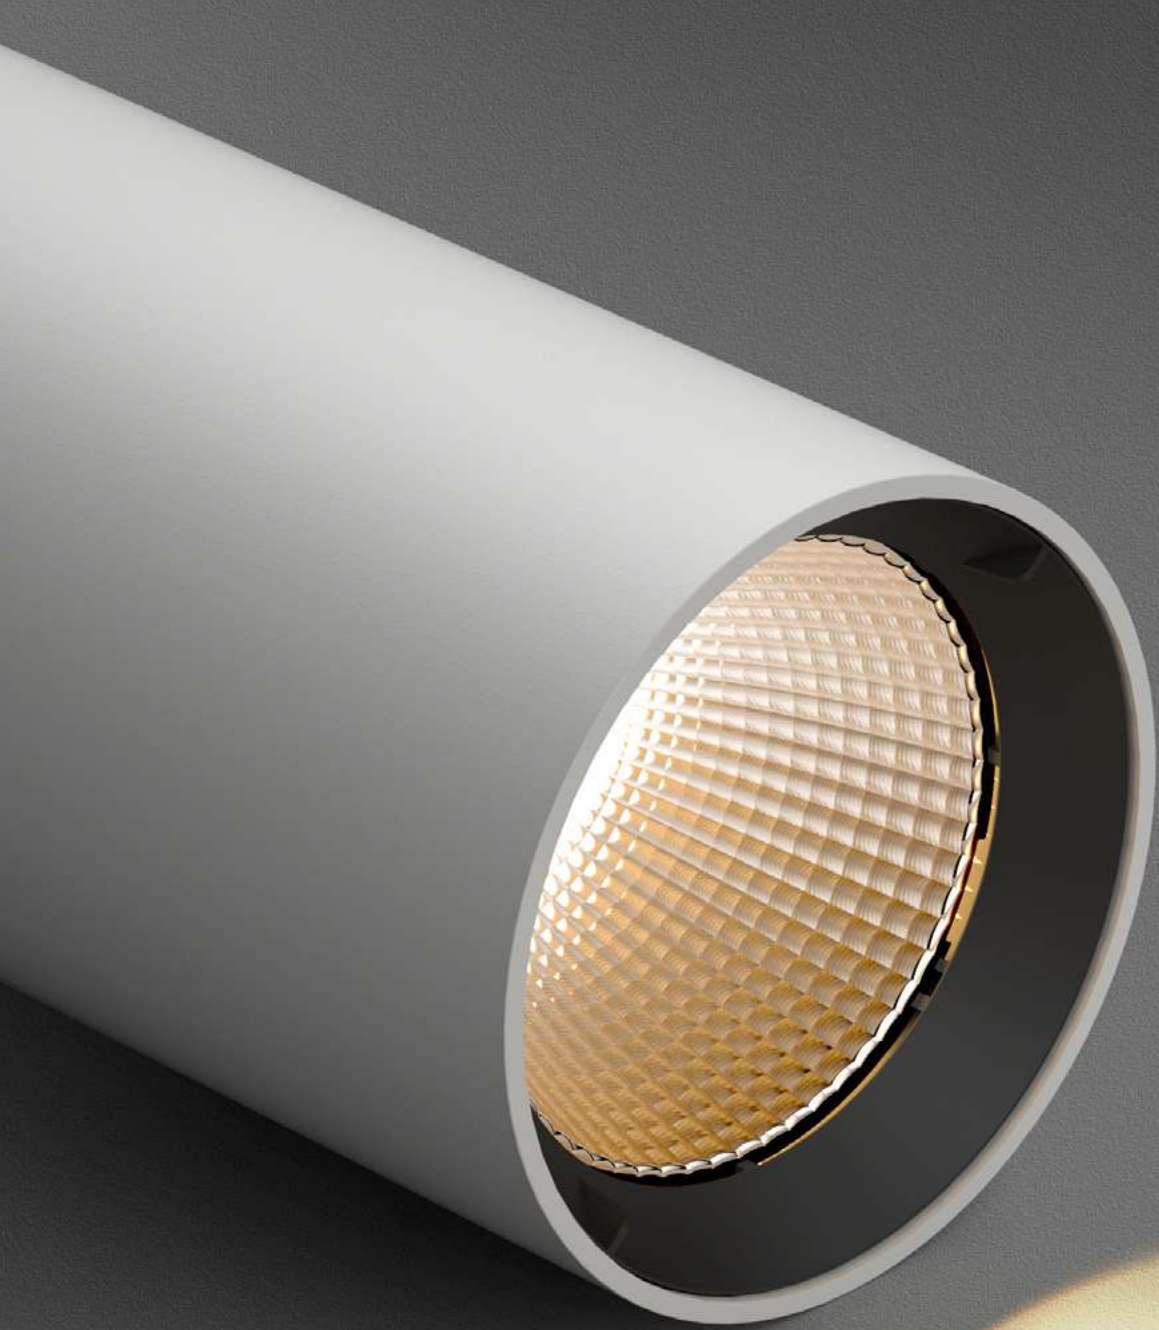

Spot a binario trifase dal design semplice e moderno.

Dimensioni contenute, driver integrato.

Grazie alla gamma delle potenze disponibili e alla completa serie di ottiche, risulta ideale per tutte le applicazioni nell'illuminazione direzionale.

Three-phase track spot with a simple and modern design.

Small size, integrated driver.

Thanks to the range of powers available and the complete series of optics, it is ideal for all applications in directional lighting.

LED TRACK LIGHTS

LED TRACK LIGHTS



DIONE

- Corpo in alluminio, verniciato a forno.
 - Attacco standard trifase, adatto a vari binari.
 - Driver integrato senza sfarfallio.
 - Ottica sfaccettata.
 - Facile da installare e da regolare.
 - Ottica standard 38°, 15°/24°/55°/ per opzione.
 - Garanzia: 5 anni
- Aluminum body, oven painted.
 - Standard three-phase connection, suitable for various tracks.
 - Integrated driver without flicker.
 - Faceted optics.
 - Easy to install and adjust.
 - Standard optics 38°, 15° / 24° / 55° / for option.
 - Warranty: 3 years

220V
240V
50/60Hz

350°

90°

<3

SCDM

COB

AVALIABLE

WW NW CW

PF

≥0.9

Track

SELV

CE

RoHS

Indoor

IP20

L70 to 45000hrs


Optional

15°

24°

38°


55°

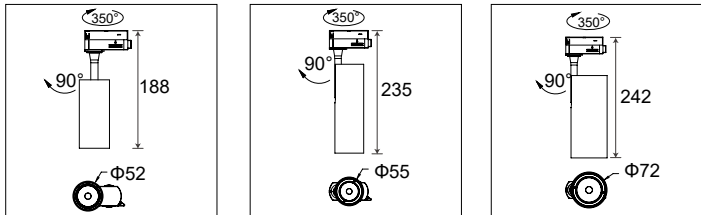

UGR <19 CRI >90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TS12K3-38-WW	Bianco White	3000K	12W	300mA	860lm	81lm/W	>90Ra	Φ52xH188mm
TS12K4-38-NW		4000K			977lm			
TS20K3-38-WW	Bianco White	3000K	20W	550mA	1545lm	90lm/W	>90Ra	Φ55xH235mm
TS20K4-38-NW		4000K			1807lm			
TS33K3-38-WW	Bianco White	3000K	33W	800mA	2420lm	85lm/W	>90Ra	Φ72xH242mm
TS33K4-38-NW		4000K			2805lm			
TSN12K3-38-WW	Nero Black	3000K	12W	300mA	860lm	81lm/W	>90Ra	Φ52xH188mm
TSN12K4-38-NW		4000K			977lm			
TSN20K3-38-WW	Nero Black	3000K	20W	550mA	1545lm	90lm/W	>90Ra	Φ55xH235mm
TSN20K4-38-NW		4000K			1807lm			
TSN33K3-38-WW	Nero Black	3000K	33W	800mA	2420lm	85lm/W	>90Ra	Φ72xH242mm
TSN33K4-38-NW		4000K			2805lm			

LED TRACK LIGHTS

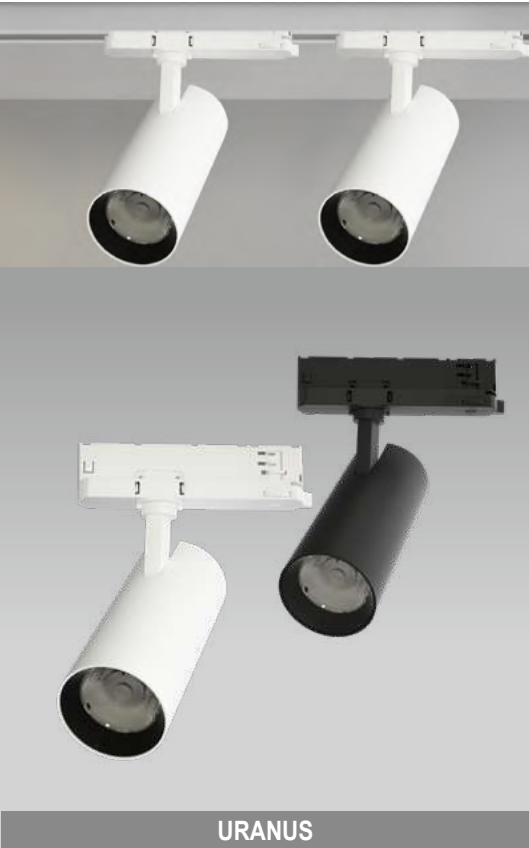

UGR <19 CRI >90

URANUS

- Corpo in alluminio, verniciato a forno.
 - Attacco standard trifase, adatto a vari binari.
 - Driver integrato senza sfarfallio.
 - Ottica sfaccettata.
 - Garanzia: 5 anni
- Aluminium body, varnished in the oven;
 - Standard triphase coupling, suitable for different tracks
 - Integrated driver without flickering;
 - Multifaceted optics
 - Warranty: 5 years

220V
240V
50/60Hz

350°

90°

COB

DP SWITCH

5 W 1

PF

≥0.9

Track

SELV

CE

RoHS

Indoor

IP20

L70 to 45000hrs

Optional

20°


40°

60°

Triac

DALI

Dimmable Dimmable




Codice Code	Finitura Finishing	CCT	Potenza Wattage	Current Corrente	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
TS.U.20.27	Bianco White	2700K	20W	500mA	2400lm	120lm/W	>90Ra	Φ60xH140x45mm
TS.U.20.WW		3000K						
TS.U.20.NW		4000K						
TS.U.30.27	Bianco White	2700K	30W	750mA	3600lm	120lm/W	>90Ra	Φ70xH165x45mm
TS.U.30.WW		3000K						
TS.U.30.NW		4000K						
TS.U.40.27	Bianco White	2700K	40W	1000mA	4800lm	120lm/W	>90Ra	Φ90xH190x45mm
TS.U.40.WW		3000K						
TS.U.40.NW		4000K						
TSN.U.20.27	Nero Black	2700K	20W	500mA	2400lm	120lm/W	>90Ra	Φ60xH140x45mm
TSN.U.20.WW		3000K						
TSN.U.20.NW		4000K						
TSN.U.30.27	Nero Black	2700K	30W	750mA	3600lm	120lm/W	>90Ra	Φ70xH165x45mm
TSN.U.30.WW		3000K						
TSN.U.30.NW		4000K						
TSN.U.40.27	Nero Black	2700K	40W	1000mA	4800lm	120lm/W	>90Ra	Φ90xH190x45mm
TSN.U.40.WW		3000K						
TSN.U.40.NW		4000K						

ACCESSORIES FOR TRACK LIGHT


POWERGEAR®




■ Dimension




3-PHASE TRACK



- White TS1MT / TS2MT / TS3MT
■ Black TSN1MT / TSN2MT / TSN3MT

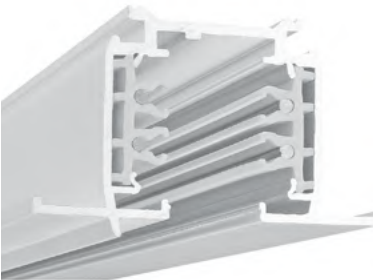


- White TS1MT-R / TS2MT-R / TS3MT-R
■ Black TSN1MT-R / TSN2MT-R / TSN3MT-R

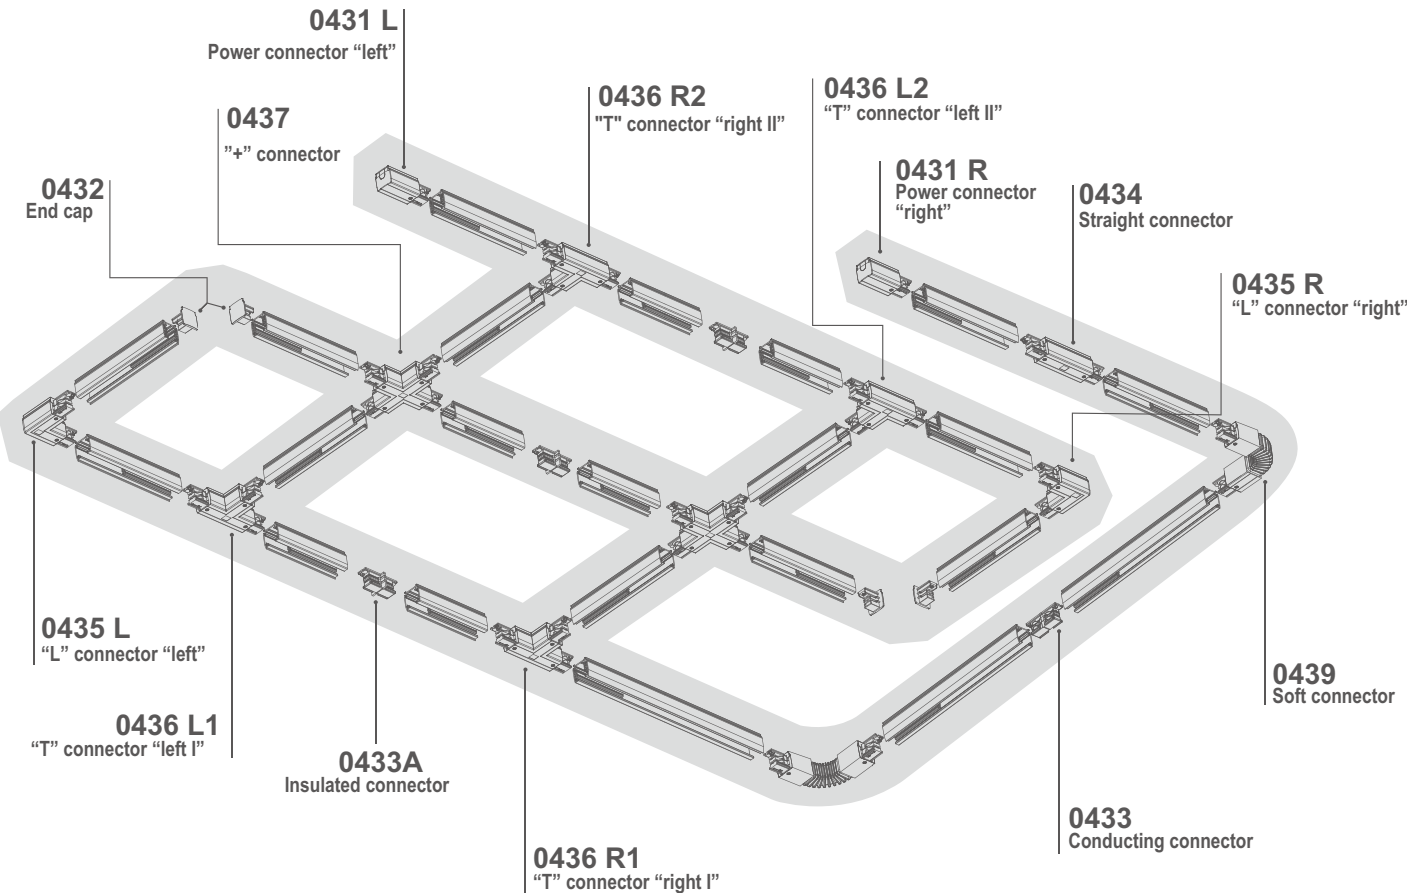


ACCESSORIES FOR TRACK LIGHT

Power connector "left"

- White TS0431L
■ Black TSN0431L




Zero line position



Power connector "right"

- White TS0431R
■ Black TSN0431R




Zero line position




End cap

- White TS0432
■ Black TSN0432




Conducting connector

- White TS0433
■ Black TSN0433




"L" connector "left"

- White TS0435L
■ Black TSN0435L




Zero line position




"L" connector "right"

- White TS0435R
■ Black TSN0435R




Zero line position




"+" connector

- White TS0437
■ Black TSN0437




Zero line position



"T" connector "right II"

- White TS0436R2
■ Black TSN0436R2




Zero line position




suspension kit

- White TS0448
■ Black TSN0448



Fixed monopoint track adaptor

- White TSC100
■ Black TSNC100





LED GROUND LIGHTS & WALL LAMP

Ideali per arricchire ambienti esterni o interni con un prodotto semplice ma elegante. L'ampia gamma e versatilità d'applicazione (pavimento, parete) offre soluzioni alle esigenze più diverse con la garanzia di un alto grado di protezione.

.....
A wide range of outdoor recessed LED equipment, perfect for architectural, accent or pathway lighting.


The materials used and the ample choice of available configurations, together with high protection rating, enable a wide range of uses for many applications, about outside and the ground or wall and inside, on the floor, wall and ceiling.

The range is made up of drive, walk over recessed spotlights.




GROUND LIGHTS

Series

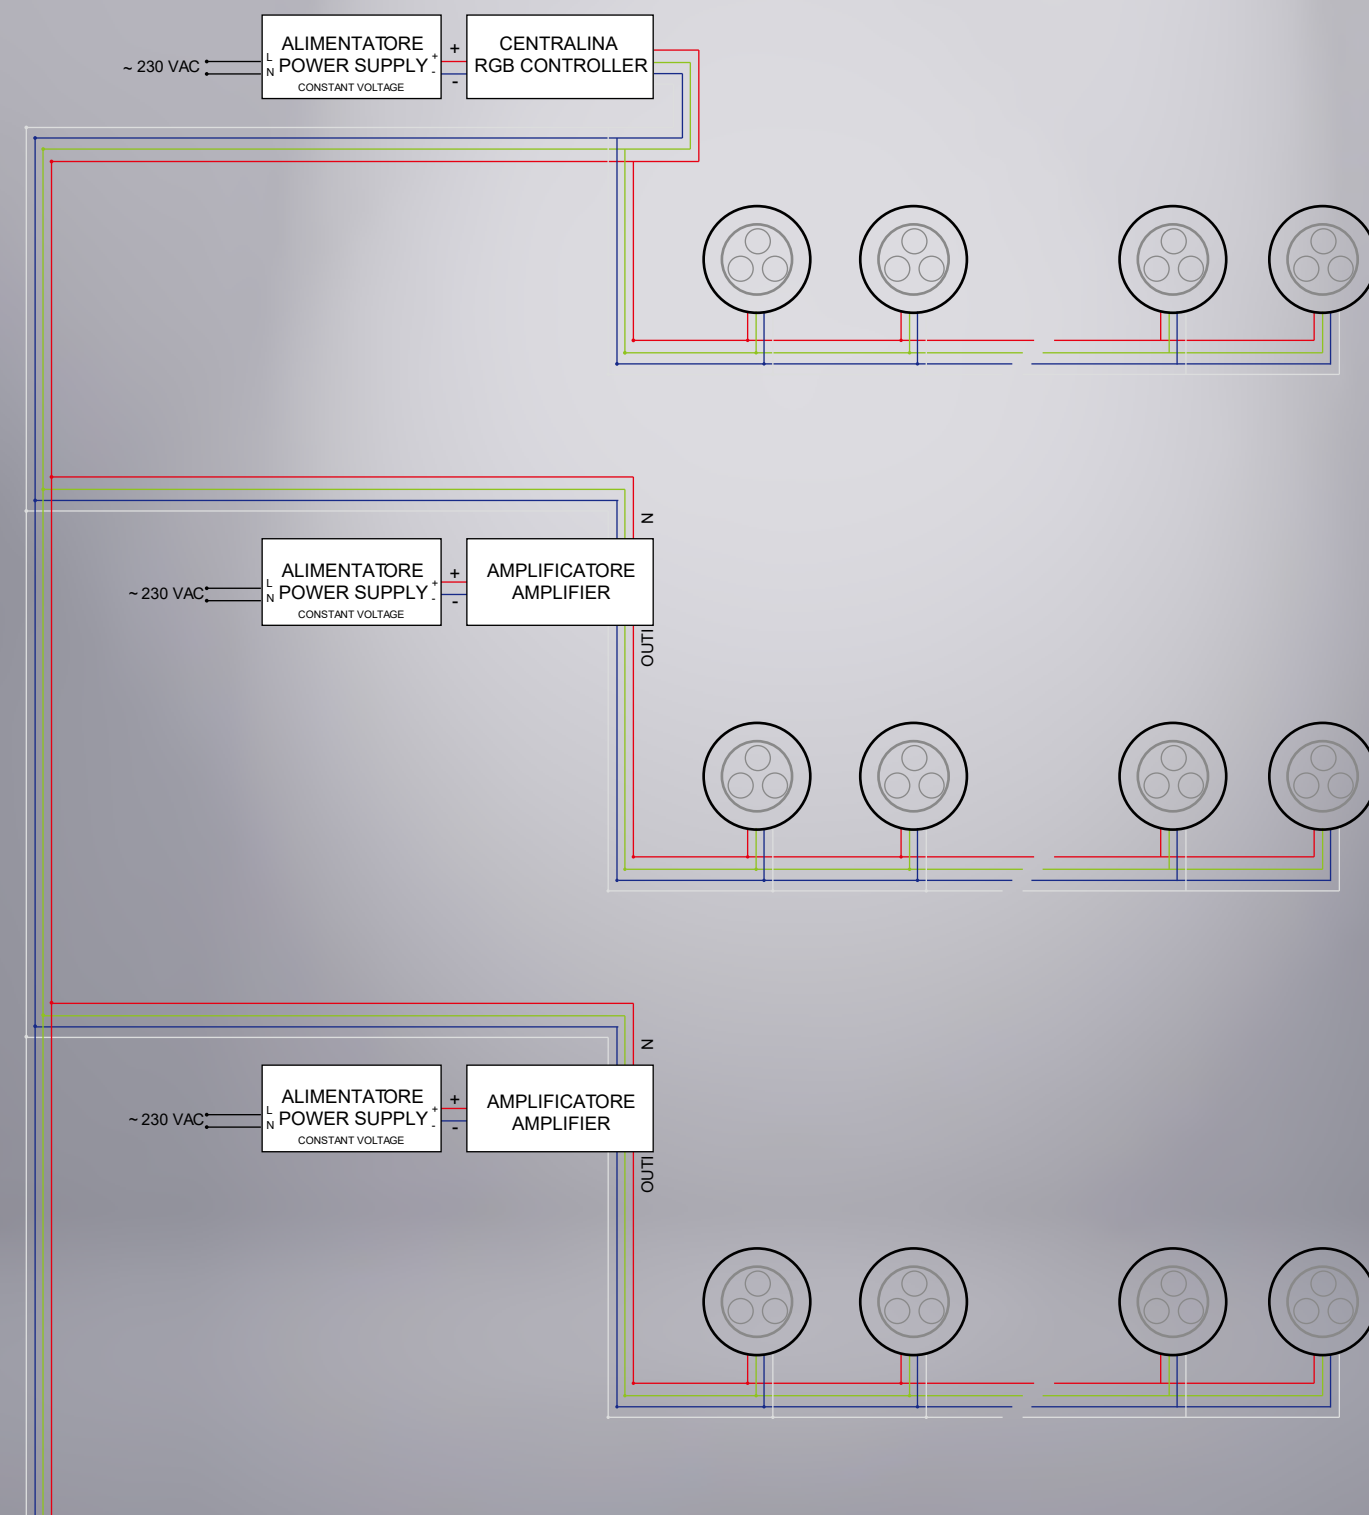

LED GROUND LIGHTS

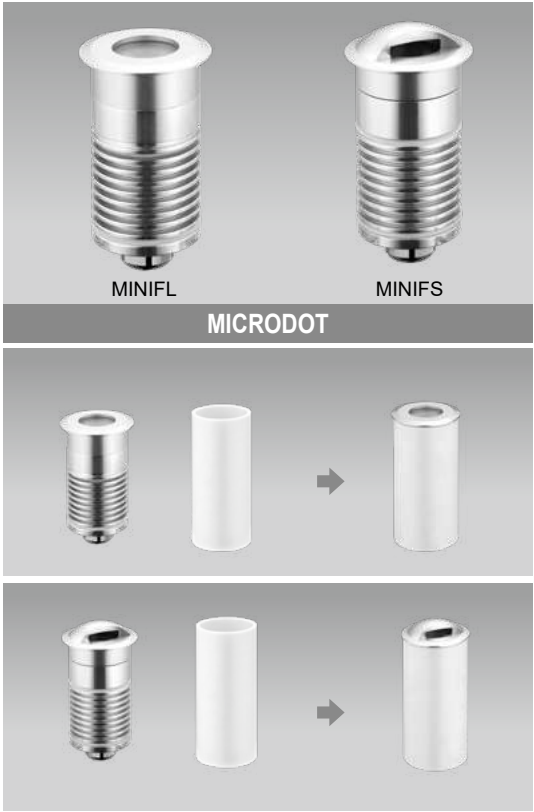

MICRODOT





- Materiale: Alluminio anodizzato
- Material: Anodised Aluminium

DC 12V

AVAILABLE WW NW CW

CE RoHS


Outdoor IP67 L70 to 45000hrs



IP67

Codice Code	Potenza Wattage		Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
MINIFL-3W-WW	Argento Silver	3000K	3W	240lm	80lm/W	Φ40x62.7mm
MINIFL-3W-NW		4000K				
MINIFL-3W-CW		6500K				
MINIFS-3W-WW	Argento Silver	3000K	3W	240lm	80lm/W	Φ40x69mm
MINIFS-3W-NW		4000K				
MINIFS-3W-CW		6500K				

LED GROUND LIGHTS

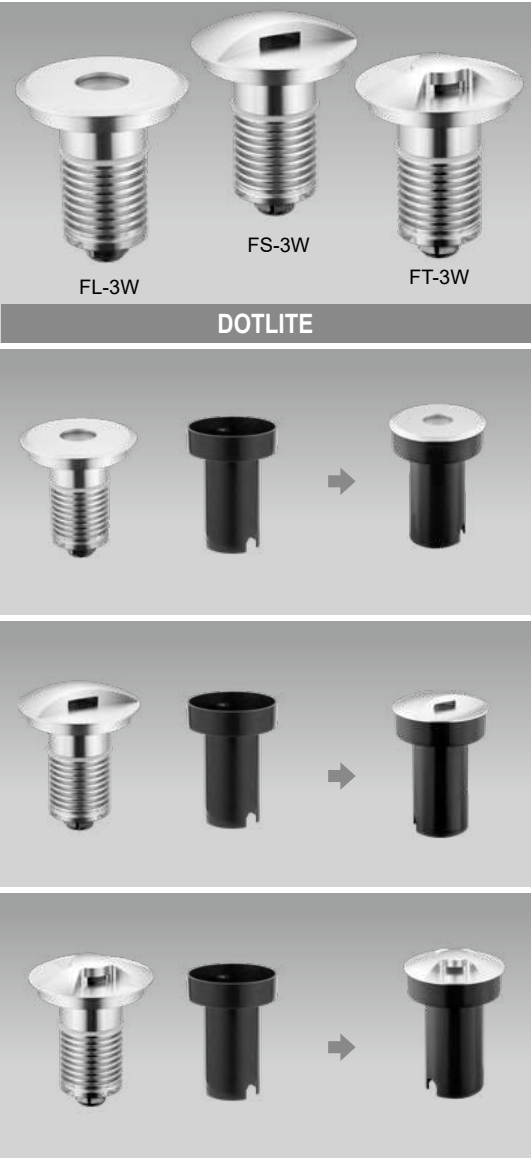

DOTLITE



- Materiale: Alluminio anodizzato
- Material: Anodised aluminium

DC 12V

AVAILABLE WW NW CW

CE RoHS

Outdoor IP67 L70 to 45000hrs



IP67






Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
FL-3W-WW	Argento Silver	3000K	3W	240lm	80lm/W	>80Ra	Φ64.5x69mm
FL-3W-NW		4000K					
FL-3W-CW		6500K					
FS-3W-WW	Argento Silver	3000K	3W	240lm	80lm/W	>80Ra	Φ64.5x71mm
FS-3W-NW		4000K					
FS-3W-CW		6500K					
FT-3W-WW	Argento Silver	3000K	3W	240lm	80lm/W	>80Ra	Φ64.5x71mm
FT-3W-NW		4000K					
FT-3W-CW		6500K					

LED GROUND LIGHTS



FOCUS

- Materiale: Alluminio e acciaio
Inox 304
- Material: Aluminium and 304
stainless stee

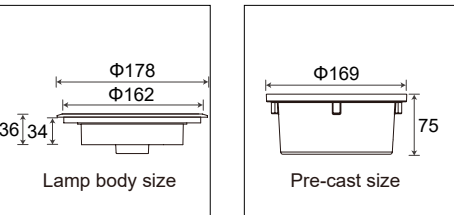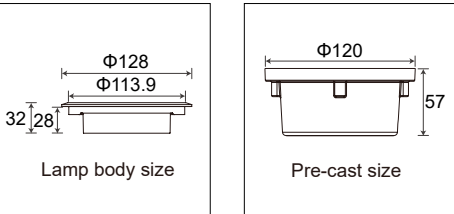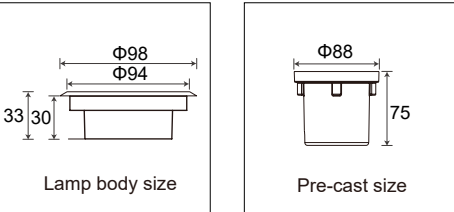


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
FL-3x1W-WW	Inox	3000K	3W	240lm	80lm/W	>80Ra	$\Phi 98 \times 33 \text{mm}$
FL-3x1W-NW		4000K					
FL-3x1W-CW		6500K					
FL-6x1W-WW	Inox	3000K	6W	480lm	80lm/W	>80Ra	$\Phi 128 \times 32 \text{mm}$
FL-6x1W-NW		4000K					
FL-6x1W-CW		6500K					
FL-9x1W-WW	Inox	3000K	9W	720lm	80lm/W	>80Ra	$\Phi 178 \times 36 \text{mm}$
FL-9x1W-NW		4000K					
FL-9x1W-CW		6500K					
FL-3x3W-RGB	Inox		9W	420lm	46lm/W	>80Ra	$\Phi 98 \times 33 \text{mm}$
FL-9x1W-RGB	Inox			420lm	46lm/W	>80Ra	$\Phi 178 \times 36 \text{mm}$

LED GROUND LIGHTS





DOTCAST

- Acciaio #316 alta qualità.
- Chip CREE.
- Viti speciali antintrusione
- Possibilità vetro satinato opzionale
- High quality # 316 steel.
- CREE chip.
- Special anti-intrusion screws
- Optional satin glass





Optional

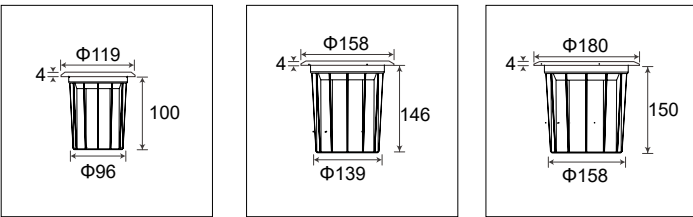

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
FL-7W-COB-WW	Argento Silver	3000K	7W	500lm	71lm/W	>80Ra	$\Phi 102 \times 120 \text{mm}$
FL-7W-COB-NW		4000K					
FL-14W-COB-WW	Argento Silver	3000K	14W	960lm	68lm/W	>80Ra	$\Phi 146 \times 163 \text{mm}$
FL-14W-COB-NW		4000K					
FL-21W-COB-WW	Argento Silver	3000K	21W	1400lm	66lm/W	>80Ra	$\Phi 165 \times 165 \text{mm}$
FL-21W-COB-NW		4000K					



BEAM



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
GL-3x1W-WW	Nero Black	3000K	3W	240lm	80lm/W	>80Ra	$\Phi 70.6 \times 265 \text{mm}$
GL-3x1W-NW		4000K					
GL-3x1W-CW		6500K					
GL-3x3W-RGB	Nero Black		9W	420lm	46lm/W	>80Ra	$\Phi 70.6 \times 265 \text{mm}$

LED WALL LAMP SERIES



ALA

- 3000/4000/6000K 3 in 1
 - Materiale: Alumimio
- 3000/4000/6000K 3 in 1
 - Material: Aluminum

175V
265V
50/60Hz

38°

PF
>0.5

Recessed

CE


RoHS

Indoor

Outdoor

IP44

L70 to 45000hrs

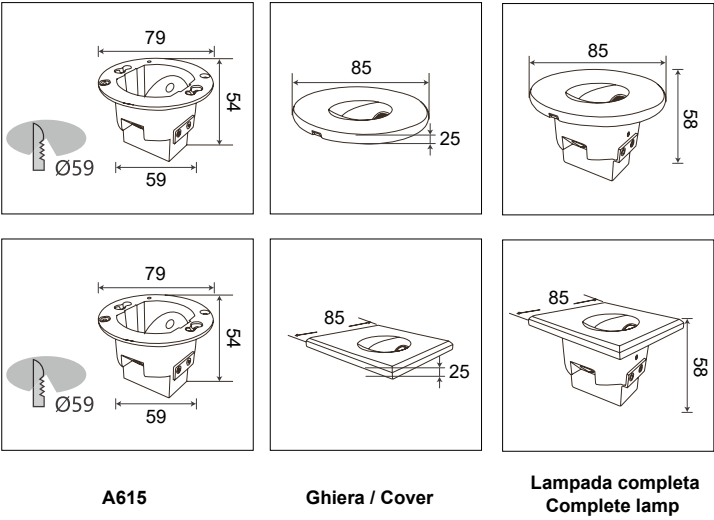

IP44

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
A615	Nero Black	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	3W	120lm	40lm/W	>80Ra	85x85x57mm Φ85x58mm	Φ59mm

Ghiere disponibili
Available cover



LED WALL LAMP SERIES



AMA

- 3000/4000/6000K 3 in 1
 - Corpo: Alumimio
 - Frontale: Vetro temperato
 - Predisposto per alloggiamento della scatola 503
- 3000/4000/6000K 3 in 1
 - Housing: Aluminum
 - Cover: Temprated glass
 - Suitable to box 503

175V
265V

50/60Hz

120°

DIP SWITCH
3 IN 1

IK06

503

PF
>0.5

Recessed


CE

RoHS

Outdoor

IP66


L70 to
50000hrs

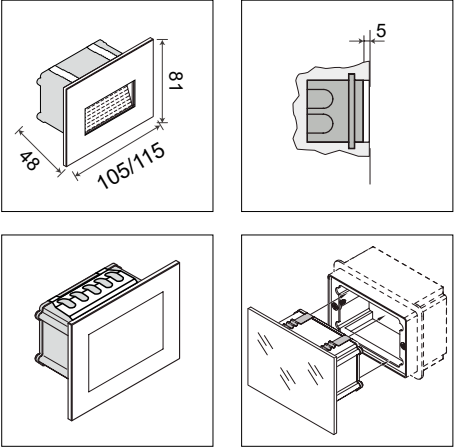

IP66

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
A003CCT3B	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	3W	200lm	70lm/W	>80Ra	105/115x81x48mm	87.5x53x55mm
A003CCT3N	Nero Black	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	3W	200lm	70lm/W	>80Ra	105/115x81x48mm	87.5x53x55mm

LED WALL LAMP SERIES

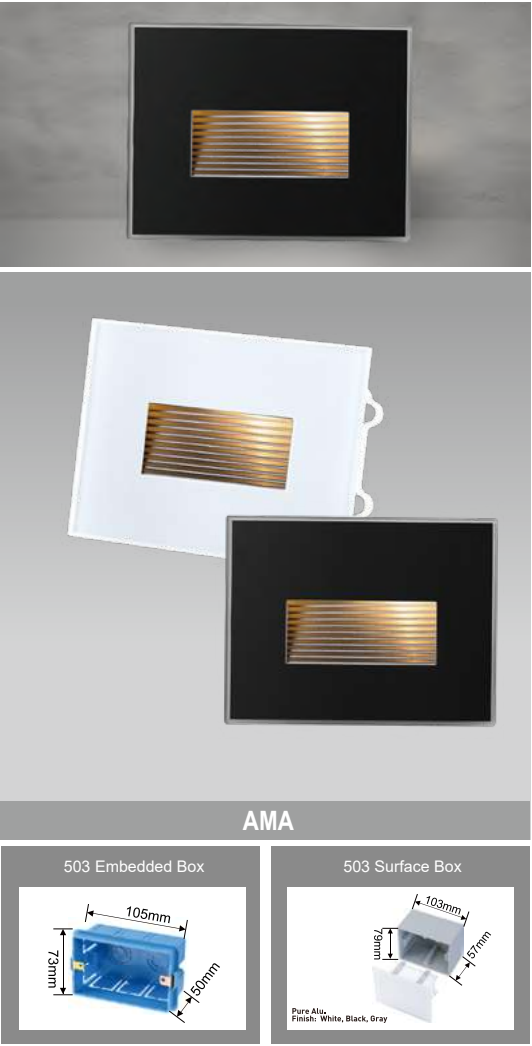

AMA

- 3000/4000/6000K 3 in 1
 - Corpo: Alumimio
 - Frontale: Vetro temperato
 - Predisposto per alloggiamento della scatola 503
- 3000/4000/6000K 3 in 1
 - Housing: Aluminum
 - Cover: Temprated glass
 - Suitable to box 503

175V
265V

50/60Hz

38°

DIP SWITCH
3 IN 1

IK06

503

PF
>0.5

Recessed


CE

RoHS

Outdoor

IP66

L70 to
50000hrs

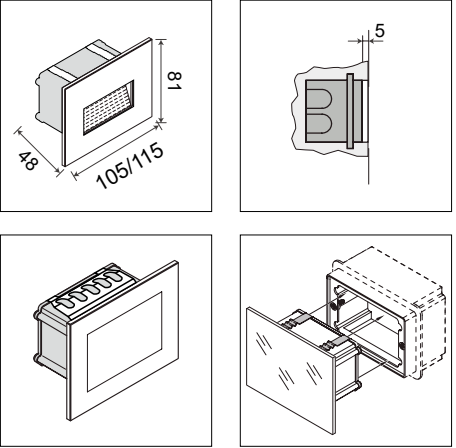

IP66

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
B003CCT3B	Bianco White	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	4.5W	150lm	70lm/W	>80Ra	105/115x81x48mm	87.5x53x55mm
B003CCT3N	Nero Black	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	4.5W	150lm	70lm/W	>80Ra	105/115x81x48mm	87.5x53x55mm

LED WALL LAMP SERIES



FLAT

- 3000/4000/6000K 3 in 1
 - Corpo: Alumimio
 - Frontale: Vetro temperato
 - Predisposto per alloggiamento della scatola 503
 - Garanzia: 2 anni
- 3000/4000/6000K 3 in 1
 - Housing: Aluminum
 - Cover: Temprated glass
 - Suitable to box 503
 - Warranty: 2 years

175V
265V
50/60Hz

120°

CLASS II

IK08

503

PF >0.5

Recessed

CE

RoHS

Indoor

Outdoor

IP65

L70 to 45000hrs


FLAT

503 Embedded Box

3 Cover Color Included

3 Ghiere incluse

LED WALL LAMP SERIES

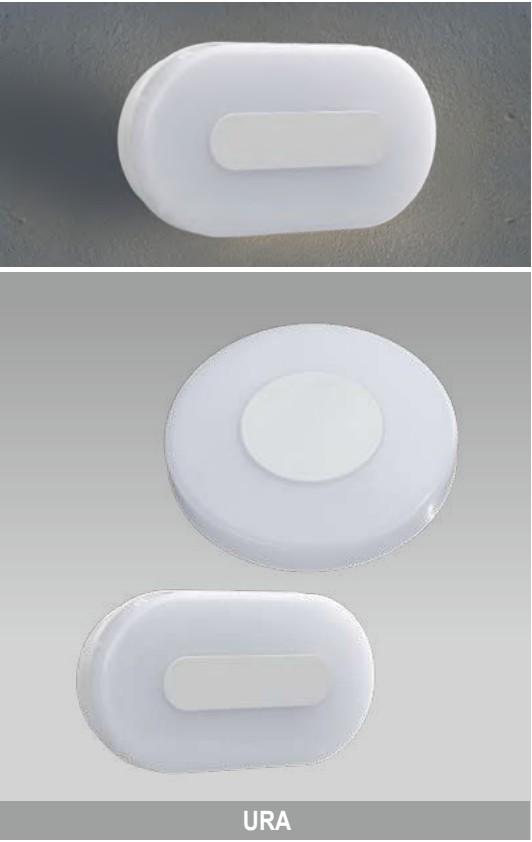

URA

- Base e copertura per PC, resistenti alle alte temperature
 - Installazione facile
 - Garanzia: 2 anni
- Premium PC base and PC cover, resistant to high temperature and low glare effect
 - Easy installation
 - Warranty: 2 years

175V
265V
50/60Hz

120°

CLASS II

PF >0.7

Surface

CE

RoHS

Outdoor

IP65

L70 to 45000hrs

URA

BH0117

BH0118

IP65

Codice Code	CCT	Potenza Wattage	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions	Foro Cutout
A902-3CCT	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	2.5W	150lm	70lm/W	>80Ra	107x67x50mm	102x60mm

EMERGENCY

IP66

Codice Code	CCT	Potenza Wattage	Lumen @4000K	Potenza in emergenza Wattage in emergency	Durata batteria (ore) Battery working time (hrs)
A902E-3CCT	DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	2.5W	150lm	1.5W	2 / TSN0570

Batteria: 3.7V / 1200mA 18650 LITIO
Battery: 3.7V / 1200mA 18650 LITHIUM

IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
BH0117	Bianco White	4000K	12W	840lm	70lm/W	>80Ra	Φ170x50mm
BH0118	Bianco White	4000K	12W	840lm	70lm/W	>80Ra	Φ205x115x50mm

ROCK

Series

LED WALL LAMP SERIES

ROCK

- 3000/4000/6000K 3 in 1
- Corpo in alluminio
- Garanzia: 3 anni
- 3000/4000/6000K 3 in 1
- Aluminum housing
- Warranty: 3 years

175V
265V
50/60Hz

100°

DIP SWITCH 3 IN 1

PF
>0.7

Surface

CE

RoHS

ErP




Indoor

Outdoor

IP65

L70 to 45000hrs



ROCK

 IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen @4000K	Efficacy @4000K	CRI	Dimensioni Dimensions
BH1109	Bianco White	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	12W	1000lm	83lm/W	>80Ra	175x90x29/51mm
BH1109N	Nero Black	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	12W	1000lm	83lm/W	>80Ra	175x90x29/51mm

LED FLOOD LIGHTS & STREET LIGHTS

■ PRESTAZIONI / PERFORMANCE

Prodotti concepiti per l'illuminazione di tutti gli spazi esterni come grandi aree, giardini e portici, illuminazione residenziale e stradale.

I prodotti offrono ottime prestazioni illuminotecniche con un consumo energetico ridotto fino al 70% rispetto ai sistemi tradizionali.

I materiali utilizzati, alluminio pressofuso, vetri di protezione temprati, minuterie in acciaio, garantiscono resistenza e durata nel tempo.

Products designed for the lighting of all outdoor spaces such as large areas, gardens and arcades, residential and street lighting.

The products offer excellent lighting performance with energy consumption reduced by up to 70% compared to traditional systems.



LED FLOOD LIGHTS



LYNX

- Corpo in pressofusione di alluminio.
 - Vetro di chiusura temprato e serigrafato.
 - Design brevettato
 - Garanzia: 2 anni
- Die-cast aluminum body.Tempered and silk-screened closing glass.
 - Patented design.
 - Warranty: 2 years

175V
265V

50/60Hz

120°

AVAILABLE

WW WW CW

CLASS

I

IK08

PF

>0.9

CE


RoHS

ErP

Outdoor

IP65

L70 to 45000hrs



IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
FDBN-10W-WW	Bianco White	3000K	10W	900lm	90lm/W	>90Ra	118x85x20.5mm
FDBN-10W-NW		4000K					
FDBN-20W-WW	Bianco White	3000K	20W	1800lm	90lm/W	>90Ra	162x115x20.5mm
FDBN-20W-NW		4000K					
FDBN-30W-WW	Bianco White	3000K	30W	2700lm	90lm/W	>90Ra	193x138x20.5mm
FDBN-30W-NW		4000K					
FDBN-50W-WW	Bianco White	3000K	50W	4500lm	90lm/W	>90Ra	235x165x20.5mm
FDBN-50W-NW		4000K					
FDBN-100W-WW	Bianco White	3000K	100W	9000lm	90lm/W	>90Ra	300x220x31mm
FDBN-100W-NW		4000K					

FDCN-10W-WW	Nero Black	3000K	10W	900lm	90lm/W	>90Ra	118x85x20.5mm
FDCN-10W-NW		4000K					
FDCN-20W-WW	Nero Black	3000K	20W	1800lm	90lm/W	>90Ra	162x115x20.5mm
FDCN-20W-NW		4000K					
FDCN-30W-WW	Nero Black	3000K	30W	2700lm	90lm/W	>90Ra	193x138x20.5mm
FDCN-30W-NW		4000K					
FDCN-50W-WW	Nero Black	3000K	50W	4500lm	90lm/W	>90Ra	235x165x20.5mm
FDCN-50W-NW		4000K					
FDCN-100W-WW	Nero Black	3000K	100W	9000lm	90lm/W	>90Ra	300x220x31mm
FDCN-100W-NW		4000K					

LED FLOOD LIGHTS



SEPIK

- Corpo in pressofusione di alluminio.
 - Vetro di chiusura temprato e serigrafato.
 - Box di connessione sul retro IP65
 - Design brevettato
 - Garanzia: 2 anni
- Die-cast aluminum body.
 - Tempered and silk-screened closing glass.
 - Connection box on the back IP65
 - Patented design.
 - Warranty: 2 years

180V
260V

50/60Hz

120°

DIP SWITCH 3 IN 1

CLASS

I

IK07

PF

>0.9

CE


RoHS

ErP

Outdoor

IP65

25000hrs



IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
FDT-30W	Nero Black	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	30W	2400lm	80lm/W	>80Ra	198x190.5x43.5mm
FDT-50W	Nero Black	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	50W	4000lm	80lm/W	>80Ra	229x213x43.5mm

LED STREET LIGHTS



FORTE

- Armatura stradale realizzata in alluminio pressofuso verniciato a polvere.
- Vetro trasparente temprato e resistente agli shock termici.
- Ottica in PMMA ad alto rendimento, resistente alle alte temperature.
- Staffa adatta sia per i pali diritti che per i pali a frusta.
- Garanzia: 5 anni
- Street lighting made of powder-coated die-cast aluminum.
- Transparent tempered glass resistant to thermal shocks.
- High-performance PMMA optic, resistant to high temperatures.
- Bracket suitable for both straight poles and whip poles.
- Warranty: 5 years

200V
265V
50/60Hz

90V
305V
50/60Hz

90°

AVAILABLE

WW NW CW

CLASS
I


IK08

PF
>0.9

Outdoor

IP65

L70 to 50000hrs

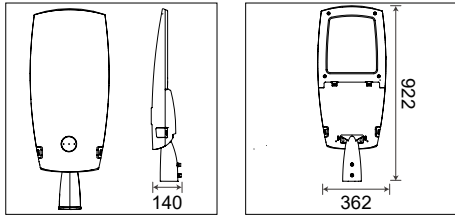

LED STREET LIGHTS



STORM

- Armatura stradale realizzata in alluminio pressofuso verniciato a polvere.
- Vetro trasparente temprato e resistente agli shock termici.
- Ottica in PMMA ad alto rendimento, resistente alle alte temperature.
- Staffa adatta sia per i pali diritti che per i pali a frusta.
- Garanzia: 5 anni
- Street lighting made of powder-coated die-cast aluminum.
- Transparent tempered glass resistant to thermal shocks.
- High-performance PMMA optic, resistant to high temperatures.
- Bracket suitable for both straight poles and whip poles.
- Warranty: 5 years

200V
265V
50/60Hz

90°

AVAILABLE

WW NW CW

CLASS
I

IK08

PF
>0.9

Outdoor

IP65

L70 to 50000hrs

IP65

Codice Code	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	LED Type	Dimensioni Dimensions	Installation Pipe Diameter	Installation Height
Z120-60W-NW	4000K	60W	7200lm	120lm/W	>80Ra	3030 SMD	621x287x105mm	Φ60mm	6-8m
Z120-100W-NW	4000K	100W	12000lm	120lm/W	>80Ra	3030 SMD	738x289x118mm	Φ60mm	6-8m
Z180-150W-NW	4000K	150W	18000lm	120lm/W	>80Ra	3030 SMD	922x362x140mm	Φ60mm	8-10m
Z180-200W-NW	4000K	200W	24000lm	120lm/W	>80Ra	3030 SMD	922x362x140mm	Φ60mm	10-12m

IP65

Codice Code	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	LED Type	Dimensioni Dimensions	Installation Pipe Diameter	Installation Height
J50-NW	4000K	50W	5000lm	100lm/W	>80Ra	3030 SMD	490x165x72mm	ø60mm	6-8m

LED HIGHBAY LIGHTS

Riflettore industriale progettato per l'installazione in ambienti industriali di grandi dimensioni, reparti produttivi, magazzini e grandi aree.

Industrial reflector designed for installation in large industrial environments, production departments, warehouses and large areas.





IRON MAN

- Supporto e vano ottico realizzati in alluminio verniciati a forno colore nero.
- Ottiche in PC.
- Vano ottico orientabile fino a 45°.
- Angolo del fascio standard 60°, 25° e 90° disponibile per opzione.
- Disponibili kit di sospensione e montaggio a parete.
- Garanzia: 5 anni
- Strong modern aluminum housing, Excellent finish.
- Standard beam angle 60°, 25° & 90° available for option.
- Suspension kit and wall mounting available.
- Warranty: 5 years.

175V
277V
50/60Hz

AVALIABLE
WW NW CW

Suspended

CE

RoHS


CB

Indoor

Outdoor

IP66

L70 to 50000hrs

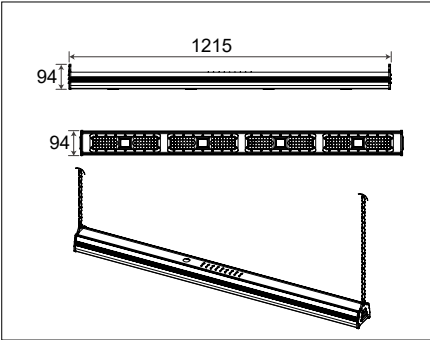

1-10V dimmable

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
B1201-NW	Nero Black	4000K	200W	25000lm	125lm/W	>80Ra	1215X94X94mm



LED NEW HIGHBAY LIGHTS



APEX

- Riflettore industriale con corpo e dissipatore integrato in pressofusione di alluminio verniciato nero.
 - Schermo in policarbonato resistente agli shock termici.
 - Garanzia: 5 anni
- Industrial reflector with body and integrated heat sink in black painted die-cast aluminum.
 - Thermal shock resistant polycarbonate screen.
 - Warranty: 5 years

220V
~
240V

50/60Hz

90°

DIP SWITCH 3 IN 1

CLASS I

IK08

PF >0.9

Suspended

CE

RoHS


CB

Indoor

Outdoor

IP66

L70 to 50000hrs

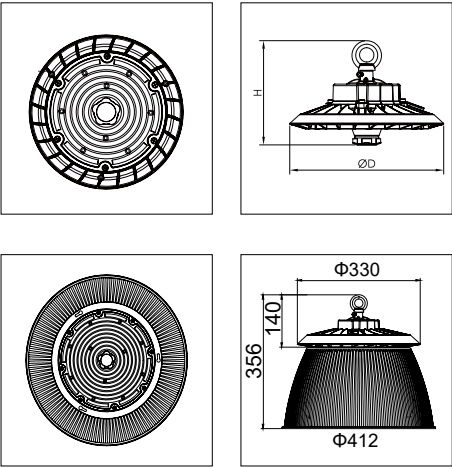

3CCT & 3 Power 

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
B2330	Nero Black	 DIP SWITCH 3 IN 1 3000K, 4000K, 6000K	120W	20400lm	170lm/W	>80Ra	Φ330x162mm
			160W	26400lm	165lm/W		
			200W	32000lm	160lm/W		

LED NEW HIGHBAY LIGHTS



VORTEX

- Riflettore industriale con corpo e dissipatore integrato in pressofusione di alluminio verniciato nero.
 - Schermo in policarbonato resistente agli shock termici.
 - Garanzia: 5 anni
- Industrial reflector with body and integrated heat sink in black painted die-cast aluminum.
 - Thermal shock resistant polycarbonate screen.
 - Warranty: 5 years

175V
~
277V

50/60Hz

90°

AVAILABLE
WW NW CW

Suspended

CE

RoHS


CB

Indoor

Outdoor

IP66

L70 to 50000hrs

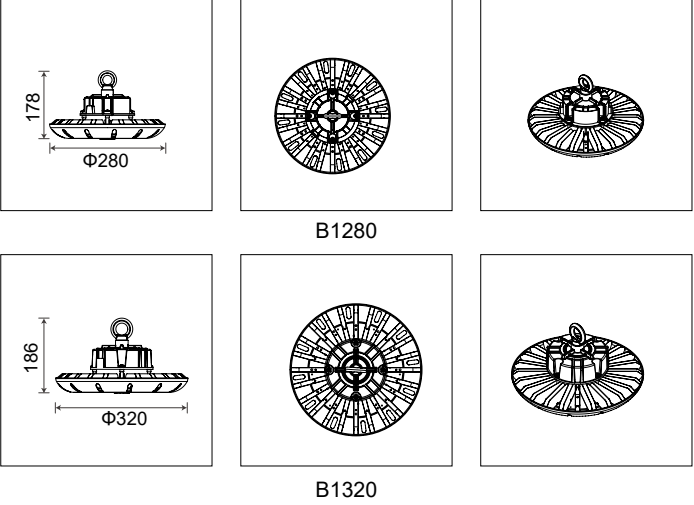

1-10V dimmable 

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Efficacy @4000K	CRI	Dimensioni Dimensions
B1280-NW	Nero Black	4000K	100W	14000lm	140lm/W	>80Ra	Φ280x178mm
B1320-NW	Nero Black	4000K	150W	21000lm	140lm/W	>80Ra	Φ320x186mm

Caratterizzate da un'ampia versatilità, queste strisce sono particolarmente utili per molteplici applicazioni,

Le strisce LED sono facili da installare, sono caratterizzate da un bassissimo consumo energetico e durano per oltre 30.000 ore senza alcuna manutenzione.

la gamma offre diverse tipologie di led e tre differenti gradi di protezione IP20 / IP64 / IP67 così da soddisfare le esigenze più disparate.

Characterized by a wide versatility, these strips are particularly useful for multiple applications.

The LED strips are easy to install, are characterized by a very low energy consumption and last for over 30,000 hours without any maintenance.

The range offers different types of LEDs and three different degrees of protection IP20 / IP64 / IP67 in order to satisfy the most diverse needs.



LED STRIP

NEON FLEX STRIP



DC
24V

120°

CE


RoHS

Outdoor

IP67

40000hrs

14.4W 450 lm 120LED/m

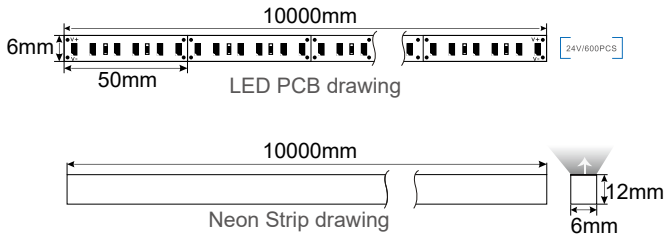

Accessories



0612KIT-AL



0612KIT-CON



0612KIT-TP



0612KIT-ML



0612KIT-PR1M

CRI>90


Step MacAdam:3

Codice Code	Leds/m	CCT	Potenza Wattage	Lumen	CRI	Strip Width	Max Length to be Connercted
K0612K3	120pcs	3000K	14.4W/m	450LM/m	>90Ra	6mm	≤5m
K0612K4	120pcs	4000K	14.4W/m	450LM/m	>90Ra	6mm	≤5m
K0612K6	120pcs	6500K	14.4W/m	450LM/m	>90Ra	6mm	≤5m
K0612R	120pcs	Red	14.4W/m	—	—	6mm	≤5m
K0612G	120pcs	Green	14.4W/m	—	—	6mm	≤5m
K0612B	120pcs	Blue	14.4W/m	—	—	6mm	≤5m
K0612Y	120pcs	Yellow	14.4W/m	—	—	6mm	≤5m
K0612-RGB	120pcs 4040RGB	RGB	9.6-28.8W/m	—	—	6mm	≤10m




3528 SMD LED STRIP

- Striscia led flessibile su circuito bianco riflettente.
 - Le versione IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
 - IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
 - La striscia è fornita in bobina da 5m.
 - Temperatura di Lavoro:-20°C ~ +35°C
 - Disponibile anche 2700K su richiesta
- Flexible led strips with reflective white circuit
 - The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
 - IP64 is protected with silicone, IP67 is protected with the silicone tube
 - The strip is supplied in 5m/reel
 - Working temperature:-20°C ~ +35°C
 - Available on request 2700K

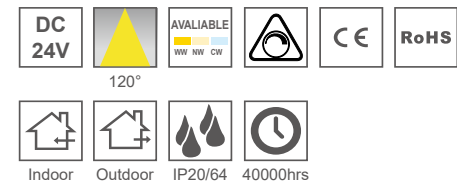

9.6W 720 lm 120LED/m




Versione DC24V: ogni 6 LED/50mm
DC24V version: every 6 LED/50mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3

Codice Code	n° Led	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R600/352820WW24	120/m	3000K	9.6W/m	720lm/m	>80Ra	3528 SMD	5m	20
R600/352820NW24		4000K						
R600/352820CW24		6000K						
R600/352864WW24	120/m	3000K	9.6W/m	640lm/m	>80Ra	3528 SMD	5m	64
R600/352864NW24		4000K						
R600/352864CW24		6000K						

20W 1440 lm 240LED/m



Versione DC24V: ogni 6 LED/25mm
DC24V version: every 6 LED/25mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3


Codice Code	n° Led	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R1200/352820WW24	240/m	3000K	20W/m	1440lm/m	>80Ra	3528 SMD	2.50m	20
R1200/352820NW24		4000K						
R1200/352820CW24		6000K						
R1200/352864WW24	240/m	3000K	20W/m	1440lm/m	>80Ra	3528 SMD	2.50m	64
R1200/352864NW24		4000K						
R1200/352864CW24		6000K						

3014 SMD LED STRIP

- Striscia led flessibile su circuito bianco riflettente.
 - Le versione IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
 - IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
 - La striscia è fornita in bobina da 5m.
 - Temperatura di Lavoro:-20°C ~ +35°C
 - Disponibile anche 2700K su richiesta
- Flexible led strips with reflective white circuit
 - The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
 - IP64 is protected with silicone, IP67 is protected with the silicone tube
 - The strip is supplied in 5m/reel
 - Working temperature: -20°C ~ +35°C
 - Available on request 2700K



14.4W 1080 lm 120LED/m




Versione DC24V: ogni 6 LED/50mm
DC24V version: every 6 LED/50mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3

Codice Code	n° Led	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R600/301420WW24	120/m	3000K	14.4W/m	1080lm/m	>80Ra	3014 SMD	5m	20
R600/301420NW24		4000K						
R600/301420CW24		6000K						
R600/301464WW24	120/m	3000K	14.4W/m	980lm/m	>80Ra	3014 SMD	5m	64
R600/301464NW24		4000K						
R600/301464CW24		6000K						

25W 1840 lm 204LED/m




Versione DC24V: ogni 6 LED/29.4mm
DC24V version: every 6 LED/29.4mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3

Codice Code	n° Led	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R1020/301420WW24	204/m	3000K	25W/m	1840lm/m	>80Ra	3014 SMD	2.50m	20
R1020/301420NW24		4000K						
R1020/301420CW24		6000K						
R1020/301464WW24	204/m	3000K	25W/m	1650lm/m	>80Ra	3014 SMD	2.50m	64
R1020/301464NW24		4000K						
R1020/301464CW24		6000K						

2835 SMD LED STRIP

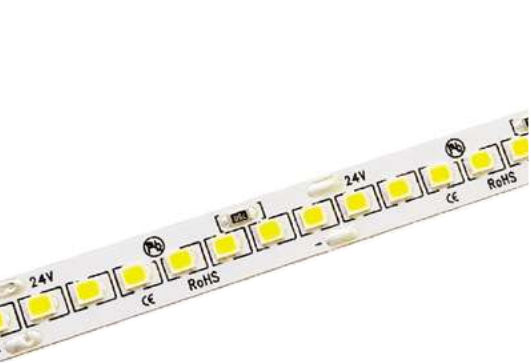

- Striscia led flessibile su circuito bianco riflettente.
 - Le versione IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
 - IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
 - La striscia è fornita in bobina da 5m.
 - Temperatura di Lavoro: -20°C ~ +35°C
 - Disponibile anche 2700K su richiesta
- Flexible led strips with reflective white circuit
 - The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
 - IP64 is protected with silicone, IP67 is protected with the silicone tube
 - The strip is supplied in 5m/reel
 - Working temperature: -20°C ~ +35°C
 - Available on request 2700K


DC
24V

AVAILABLE
WW NW CW

CE

RoHS

15W 2100 lm 84LED/m

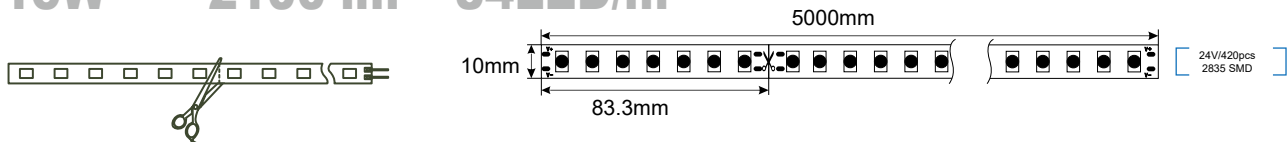


Versione DC24V: ogni 7 LED/83.3mm
DC24V version: every 7 LED/83.3mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3

Codice Code	Leds/m	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R420/283520WW24	84pcs	3000K	15W/m	2100lm/m	>90Ra	2835 SMD	5m	20
R420/283520NW24		4000K						
R420/283520CW24		6000K						
R420/283564WW24	84pcs	3000K	15W/m	2100lm/m	>90Ra	2835 SMD	5m	64
R420/283564NW24		4000K						
R420/283564CW24		6000K						

20W 2900 lm 112LED/m

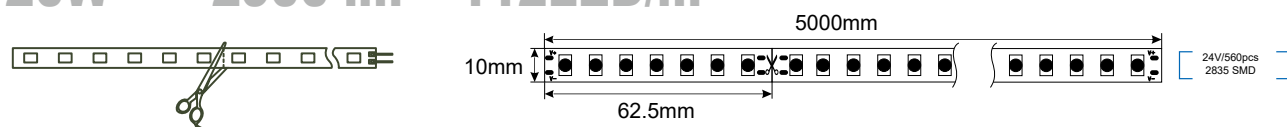


Versione DC24V: ogni 7 LED/62.5mm
DC24V versione: every 7 LED/62.5mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3

Codice Code	Leds/m	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R560/283520WW24	112pcs	3000K	20W/m	2900lm/m	>90Ra	2835 SMD	2.50m	20
R560/283520NW24		4000K						
R560/283520CW24		6000K						
R560/283564WW24	112pcs	3000K	20W/m	2900lm/m	>90Ra	2835 SMD	2.50m	64
R560/283564NW24		4000K						
R560/283564CW24		6000K						

25W 3600 lm 140LED/m

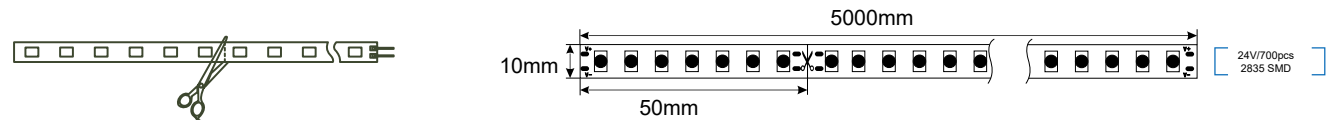

Versione DC24V: ogni 7 LED/50mm
DC24V version: every 7 LED/50mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3

Codice Code	Leds/m	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R700/283520WW24	140pcs	3000K	25W/m	3600lm/m	>90Ra	2835 SMD	5m	20
R700/283520NW24		4000K						
R700/283520CW24		6000K						
R700/283564WW24	140pcs	3000K	25W/m	3600lm/m	>90Ra	2835 SMD	5m	64
R700/283564NW24		4000K						
R700/283564CW24		6000K						

30W 4200 lm 168LED/m



Versione DC24V: ogni 7 LED/41.6mm
DC24V version: every 7 LED/41.6mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI>90 Step MacAdam:3

Codice Code	Leds/m	CCT	Potenza Wattage	Lumen	CRI	LED TYPE	Max length connectable	IP
R840/283520WW24	168pcs	3000K	30W/m	4200lm/m	>90Ra	2835 SMD	4m	20
R840/283520NW24		4000K						
R840/283520CW24		6000K						
R840/283564WW24	168pcs	3000K	30W/m	4200lm/m	>90Ra	2835 SMD	4m	64
R840/283564NW24		4000K						
R840/283564CW24		6000K						



LED STRIP RGB SERIES



Versione DC24V: ogni 6 LED/100mm
DC24V versione: every 6 LED/100mm

CRI>90 Step MacAdam:3

Codice Code	n° Led	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R300RGB2024	60/m		4.8-14.4W/m	560lm/m	5m	20
R300RGB6424				500lm/m		64
R300RGB6724				480lm/m		67





Versione DC24V: ogni 6 LED/100mm
DC24V versione: every 6 LED/100mm

CRI>90 Step MacAdam:3

Codice Code	n° Led	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R300RGBWW2024	60/m	RGB+WW	4.8-19.2W/m	560lm/m	5m	20
R300RGBNW2024		RGB+NW		500lm/m		
R300RGCW2024		RGB+CW		480lm/m		
R300RGBWW6424	60/m	RGB+WW	4.8-19.2W/m	560lm/m	5m	64
R300RGBNW6424		RGB+NW		500lm/m		
R300RGCW6424		RGB+CW		480lm/m		
R300RGBWW6724	60/m	RGB+WW	4.8-19.2W/m	560lm/m	5m	67
R300RGBNW6724		RGB+NW		500lm/m		
R300RGCW6724		RGB+CW		480lm/m		

- Striscia led flessibile su circuito bianco riflettente. Le versioni IP20 e IP64 hanno il nastro adesivo
- 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
- IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
- La striscia è fornita in bobina da 5m.
- Temperatura di Lavoro:-20°C ~ +35°C

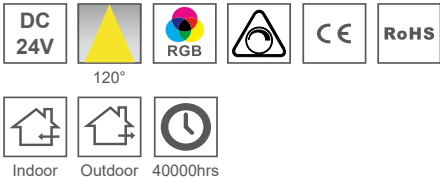

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione. It is recommended to install the LED strips in aluminum profiles for good dissipation.

- Flexible led strips with reflective white circuit
- The IP20 and IP64 versions have 3M
- adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- IP64 is protected with silicone, IP67 is protected with the silicone tube
- The strip is supplied in 5m/reel
- Working temperature: -20°C ~ +35°C

TUNABLE WHITE LED STRIP



- Flexible led strips with reflective white circuit
- 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- The strip is supplied in 5m/reel
- Temperatura di Lavoro:-20°C ~ +35°C



Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione. It is recommended to install the LED strips in aluminum profiles for good dissipation.

14.4-28.8W 2070-2300 lm 120LED/m



Versione DC24V: ogni 6 LED/50mm
DC24V versione: every 6 LED/50mm



CRI>90 Step MacAdam:3

Codice Code	Colore Colour	Potenza Wattage	Lumen	Max length connectable	IP
R600/35272024	Bianco White	14.428.8W/m	2070-2300LM/m	3m	20

LED COB LED STRIP SERIES



- Flexible led strips with reflective white circuit
- 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- The strip is supplied in 5m/reel
- Energy saving class: G
- Working temperature: -20°C ~ +35°C
- Available on request 2700K

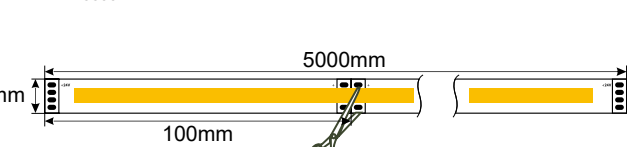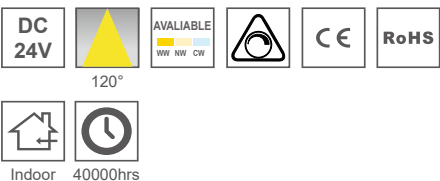


Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione. It is recommended to install the LED strips in aluminum profiles for good dissipation.

14W 900 lm


CRI>90 Step MacAdam:3

Codice Code	CCT	Potenza Wattage	Lumen	CRI	Max length connectable	IP
RCOBK3	3000K	14W/m	900LM/m	>90Ra	5m	20
RCOBK4	4000K	14W/m	900LM/m	>90Ra	5m	
RCOBK6	6000K	14W/m	900LM/m	>90Ra	5m	



Strip LED singola, lunghezza massima collegabile per singola strip 5 m.

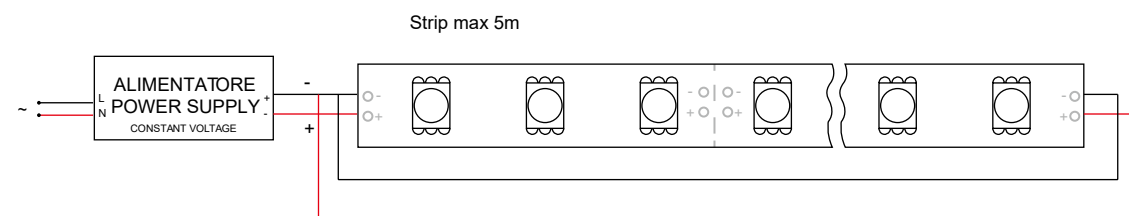

Strip LED RGB, collegamento doppio, lunghezza massima collegabile per singola strip 5 m.

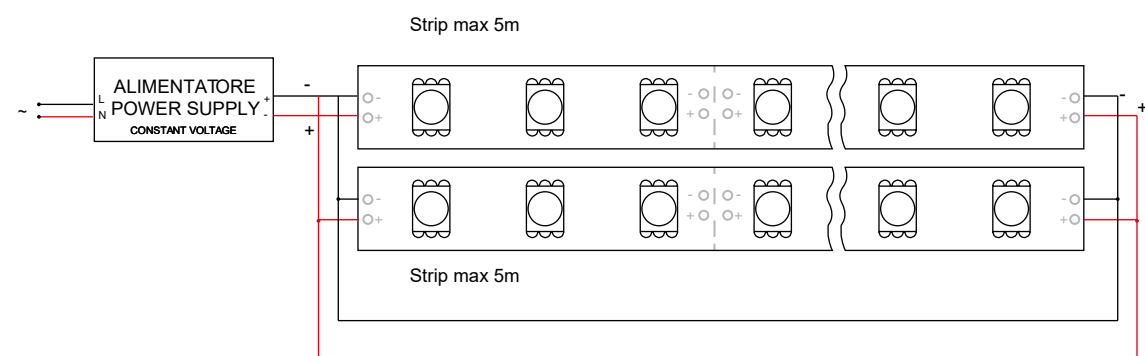

Strip LED dimmerate, collegamento multiplo, lunghezza massima collegabile per singola strip 5 m.

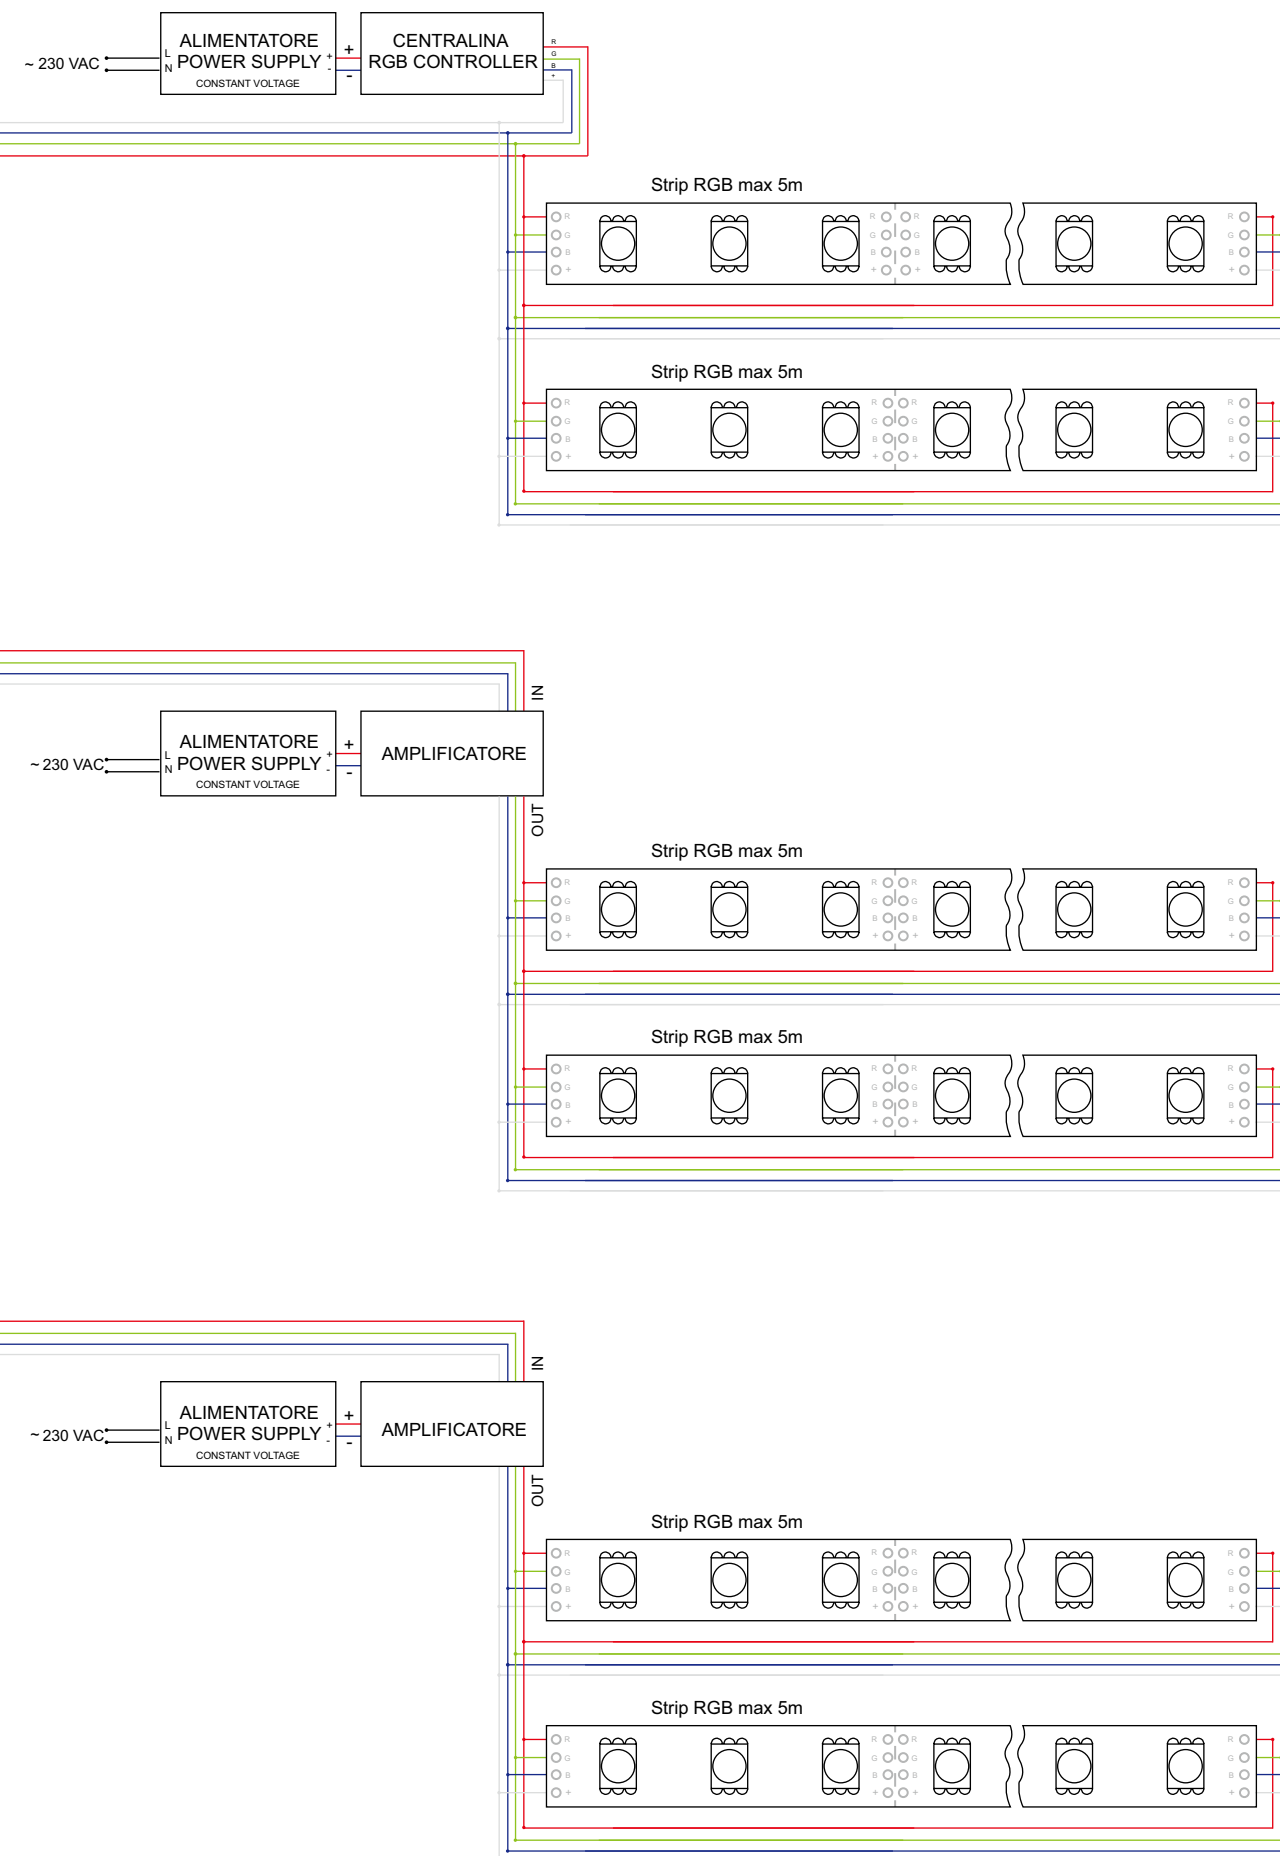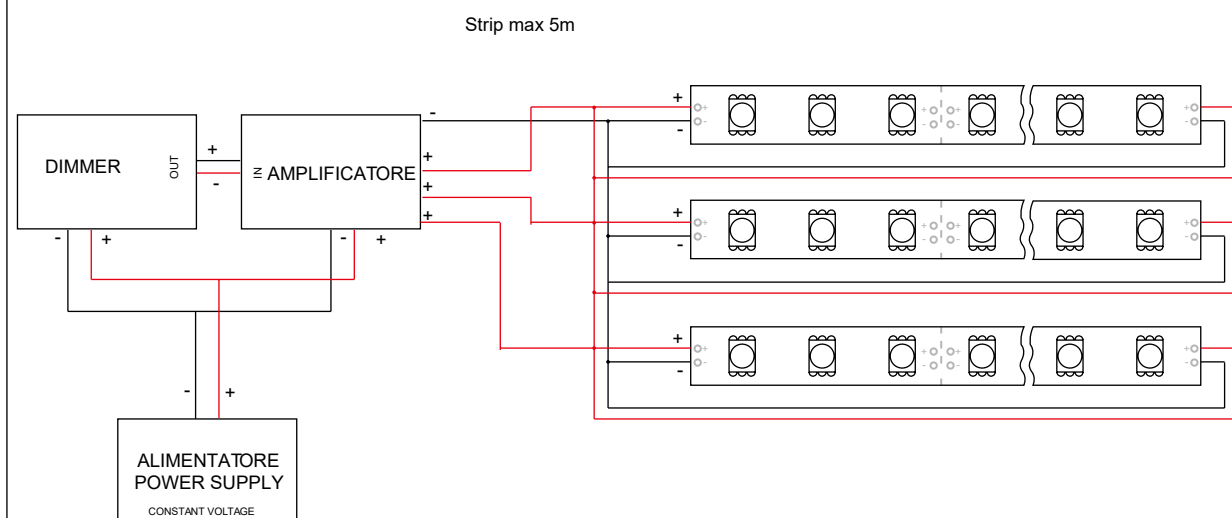

POWER SUPPLY & CONTROLLER

■ PRESTAZIONI / PERFORMANCE

I nostri alimentatori e controller per STRIP LED sono dotati di protezione contro corto circuito, sovraccarico e protezione termica. La gamma di alimentatori offre la scelta tra la tensione 12V e 24V e grado di protezione IP20 e IP67, fornendo inoltre diverse potenze tra cui scegliere. La gamma di controller consente la possibilità di dimmerare e gestire la luce delle nostre STRIP LED.

.....


Safety performance is superior, have the surge, thermal overload short circuit protection etc.



CONSTANT VOLTAGE LED DRIVER




- Design ultrasottile indipendente
 - Viti terminali catturate
 - Protezioni: opencircuit, cortocircuito, sovraccarico, sovratemperatura
 - Equivalente SELV
 - Classe di prelievo II
- Independent ultrathin design
 - Captured terminal screws
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - SELV equivalent
 - Protection class II

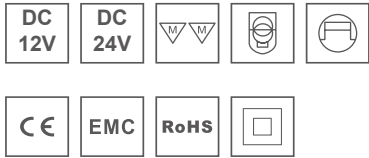

Codice Code	Input Voltage	Max. output	Output Voltage	Output current	PF	Efficiency	Dimensioni Dimensions
HVS-N-12020H19	200-240V	20W	12V	1.67A	0.8	80%	128x50x15mm
HVS-N-24020H19	200-240V	20W	24V	0.83A	0.8	82%	128x50x15mm
HVS-N-12030H18	200-240V	30W	12V	2.5A	0.8	82%	160x57.5x18mm
HVS-N-24030H18	200-240V	30W	24V	1.25A	0.8	83%	160x57.5x18mm
HVS-N-12060H17	200-240V	60W	24V	5A	0.8	86%	185x63.5x22mm
HVS-N-24060H17	200-240V	60W	24V	2.5A	0.8	86%	185x63.5x22mm
HVS-N-24100H17	200-240V	100W	24V	4.16A	0.8	92%	185x63.5x22mm
HVS-N-24150H17	200-240V	150W	24V	6.25A	0.8	92%	185x63.5x22mm




- Design super sottile
 - Viti terminali catturate
 - Protezioni: circuito aperto, corto circuito, sovraccarico, sovratemperatura
 - Equivalente SELV
 - Classe di protezione II
- Super slim design
 - Captured terminal screws
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - SELV equivalent
 - Protection class II

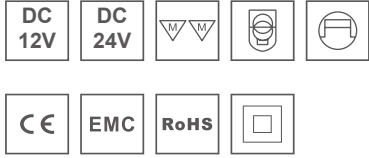

Normative


EN61347-1 (safety)
EN61347-2-13 (safety)
EN62493 (EMF)
EN55015 (emissioni)

EN61547 (immunità)
EN61000-3-2 (correnti armoniche)
EN61000-3-2 (flicker)




Codice Code	Input Voltage	Max. output	Output Voltage	Output current	PF	Efficiency	Ta	Tc	Dimensioni Dimensions
LT-60-12	220-240V	60W	12V	5.0A	0.95	90%	50°C	75°C	305x30x17mm
LT-60-24	220-240V	60W	24V	2.5A	0.95	91%	50°C	75°C	305x30x17mm
LT-75-12	220-240V	75W	12V	6.25A	0.95	90%	50°C	90°C	305x30x17mm
LT-75-24	220-240V	75W	24V	3.125A	0.95	91%	50°C	90°C	305x30x17mm
LT-100-12	220-240V	100W	12V	8.34A	0.95	91%	45°C	90°C	312x30x18.2mm
LT-100-24	220-240V	100W	24V	4.17A	0.95	92%	45°C	90°C	312x30x18.2mm

CONSTANT VOLTAGE LED DRIVER

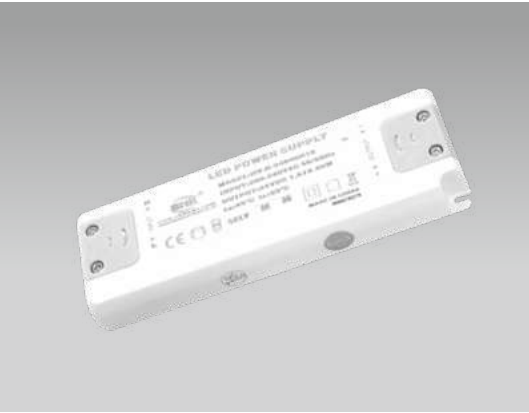


- Design ultrasottile indipendente
 - Viti terminali catturate
 - Protezioni: opencircuit, cortocircuito, sovraccarico, sovratemperatura
 - Equivalente SELV
 - Classe di prelievo II
- Independent ultrathin design
 - Captured terminal screws
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - SELV equivalent
 - Protection class II

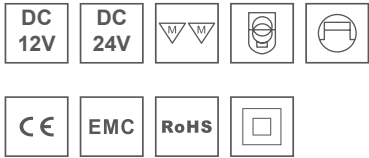

Normative



EN61347-1; EN61347-2-13 (safety)
EN61000-3-2 (correnti armoniche)
EN61000-3-3 (flicker)
RoHS



Codice Code	Input Voltage	Max. output	Output Voltage	Output current	PF	Efficiency	Ta	Tc	Dimensioni Dimensions	Net Weight
UT12V/20W	220-240V	20W	12V	1.67A	0.50	80%	45°C	85°C	128x50x13mm	0.08Kg
UT24V/20W	220-240V	20W	24V	0.83A	0.50	82%	45°C	85°C	128x50x13mm	0.08Kg
UT12V/30W	220-240V	30W	12V	2.5A	0.95	88%	40°C	90°C	155x53x16mm	0.11Kg
UT24V/30W	220-240V	30W	24V	1.25A	0.95	89%	40°C	90°C	155x53x16mm	0.11Kg
UT12V/50W	100-240V	50W	12V	4.16A	0.95	86%	50°C	85°C	185x62x22mm	0.23Kg
UT24V/50W	100-240V	50W	24V	2.1A	0.95	86%	50°C	85°C	185x62x22mm	0.23Kg



- Design compatto indipendente
 - Viti terminali catturate
 - Protezioni: opencircuit, cortocircuito, sovraccarico, sovratemperatura
 - Installazione semplice
 - Equivalente SELV
 - Classe di prelievo II
- Independent compact design
 - Captured terminal screws
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - Simple installation
 - SELV equivalent
 - Protection class II

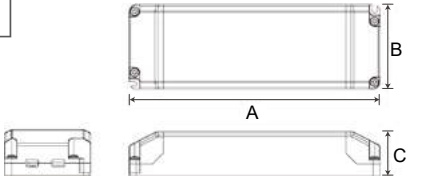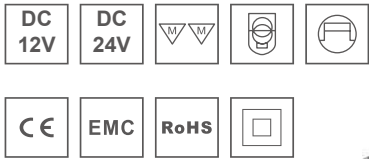


Codice Code	Input Voltage	Max. output	Output Voltage	Output current	PF	Efficiency	Ta	Tc	Dimensioni Dimensions
Q8H-12V-75W	220-240V	75W	12V	6.3A	0.95	88%	50°C	85°C	184x61x32mm
Q8H-24V-75W	220-240V	75W	24V	3.1A	0.95	89%	50°C	85°C	184x61x32mm
Q3-12V-100W	220-240V	100W	12V	8.3A	0.95	90%	45°C	85°C	184x61x32mm
Q3-24V-100W	220-240V	100W	24V	4.16A	0.95	92%	45°C	85°C	184x61x32mm
Q8H-12V-150W	220-240V	100W	12V	12.5A	0.95	90%	45°C	85°C	210x67x34mm
Q8H-24V-150W	220-240V	100W	24V	6.25A	0.95	91%	45°C	85°C	210x67x34mm

CONTROLLER & AMPLIFIER



Remote M1A / M2A / M4A

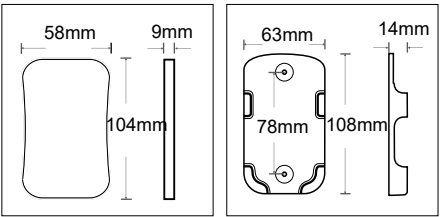


Codice Code	M1A	M1B	M2A	M2B	M4A	M4B
Color	Bianco White	Nero Black	Bianco White	Nero Black	Bianco White	Nero Black
Dimming Type	DIM		CT		RGB/RGBW	
Wireless type	RF 2.4GHz					
Working voltage	3Vdc (Button battery CR2032×1)					
Standby current	<2uA					
Distance of remote	30M (Under no interference)					
Working temp	-25~50°C					
Weight	40g±10g					
Dimensions	104×58×9mm (remote) 108×63×14mm (remote+hold)					



Remote M1A

- Controllatore mono colore a 4 zone
- 2,4 Ghz RF controllabile a distanza, entro 30 metri
 - Regolazione luminosità
- Touch RGBW LED Strip Control System
- 2,4Ghz RG Remote controllabile, control distance within 30 meters
 - Brightness Dimming

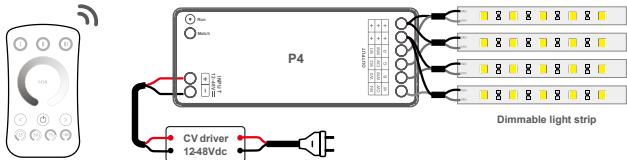



CONTROLLER DIM

Codice Code	Input Voltage	Output	Control Distance	Size
P1-DIM	DC12V-48V	Max. 11A Channel- Total output Max.11A	30m	Controller: 91x37x21mm Remote: 104x58x9mm



Remote M2A

- Controllatore mono colore a 4 zone
- 2,4 Ghz RF controllabile a distanza, entro 30 metri
 - Regolazione luminosità
- Touch RGBW LED Strip Control System
- 2,4Ghz RG Remote controllabile, control distance within 30 meters
 - Brightness Dimming

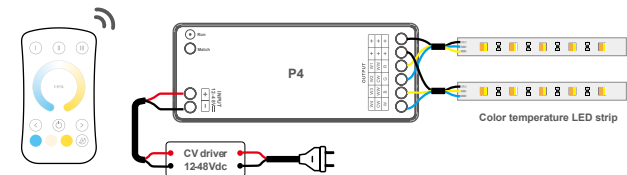

CONTROLLER CT

Codice Code	Input Voltage	Output	Control Distance	Size
P2-DIM+CCT	DC12V-48V	Max. 6A Channel- Total output Max. 12A	30m	Controller: 91x37x21mm Remote: 104x58x9mm



CONTROLLER & AMPLIFIER



Remote M4A



- Controllatore RGB
- Controllare i colori e l'intensità della strisce RGB
 - 2,4 Ghz RF controllabile a distanza, entro 30 metri
- Touch RGB LED Strip Control System
- RGB Color changing & Brightness Dimmable
 - 2,4Ghz RG Remote controllabile, control distance within 30 meters

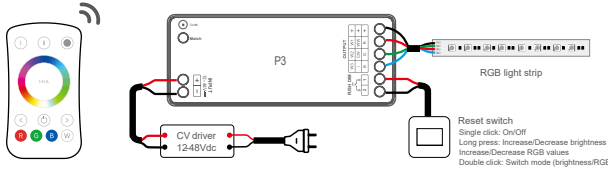

CONTROLLER RGB



Codice Code	Input Voltage	Output	Control Distance	Size
P3-RGB	DC12V-48V	Max. 5A Channel- Total output Max.15A	30m	Controller: 91x37x21mm Remote: 104x58x9mm



Remote M4A



- Controllatore RGB+W
- Controllare i colori e l'intensità della strisce RGB+W
 - 2,4 Ghz RF controllabile a distanza, entro 30 metri
- Touch RGB+W LED Strip Control System
- RGB+W Color changing & Brightness Dimmable
 - 2,4Ghz RG Remote controllabile, control distance within 30 meters

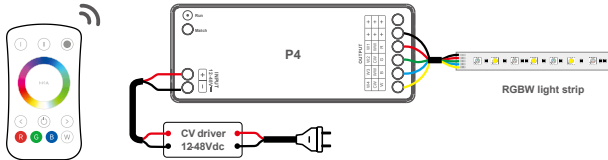


CONTROLLER RGB+W

Codice Code	Input Voltage	Output	Control Distance	Size
P4-RGBW	DC12V-48V	Max. 3.75A Channel- Total output Max. 15A	30m	Controller: 91x37x21mm Remote: 104x58x9mm



- Amplificatore a 4 canali
- Amplificando i segnali, si può collegare le strisce a una lunghezza illimitata.
- 4-Channel High Performance Amplifier
- Amplifying the receiving signals, the strip lights can extend to limitless length.



CONTROLLER Amplifier

Codice Code	Input Voltage	Output	Working Temperature	Size
P5-AMP	DC12V-24V	Max. 6A/Channel Total output Max. 10A	-20~60°C	119x46.5x22.5mm



CONTROLLER & AMPLIFIER



CONTROLLER SPI


SPI-16S Mini LED Pixel Controller

- SPI-16S è un mini controller per pixel LED, dotato di telecomando RF M16S, in grado di controllare quasi tutti i LED pilotati da IC.
- Tramite il telecomando RF M16S è possibile selezionare una varietà di effetti di illuminazione dinamici, impostare il numero di pixel controllati, regolare la velocità di variazione e la luminosità, cambiare la direzione del movimento della luce, regolare la sequenza RGB, selezionare il tipo di IC, memorizzare e riprodurre scene personalizzate, ecc.

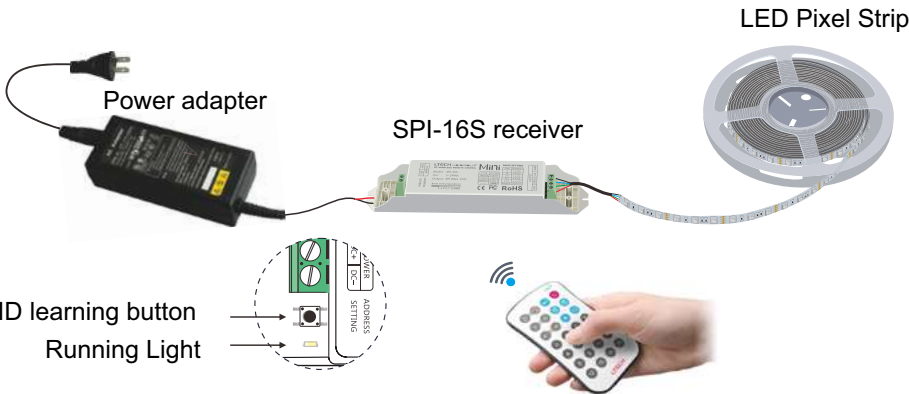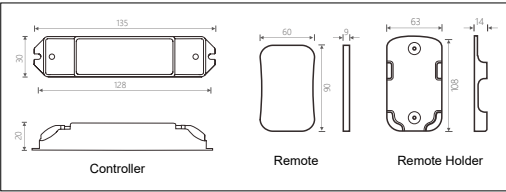

CONTROLLER SPI

Codice Code	Input Voltage	Output	Working Temperature	Size
Controller SPI-16S	DC5V-24V	Total output Max. 10A	-30~55°C	135x30x20mm
Remote M16S	DC3V Battery CR2032	Changing Mode: 16 kinds	-30~55°C	104x58x9mm




CONTROLLER
Touche Dimmer

Codice Code	Tensione Voltage	Corrente current	Potenza Wattage	Dimensioni Dimensions
K-1040-IC320	DC8-24V	≤8A	≤192W	40x10mm

SPI-16S Mini LED Pixel Controller

- SPI-16S is a Mini LED pixel controller, equipped with RF remote M16S, almost able to control all IC-driven LED lights.
- By RF remote control M16S, you can select from a variety of dynamic lighting effects, set controlled pixels quantity, adjust the changing speed and brightness, change the lighting moving direction, adjust RGB sequence, select the IC type, store and play customized scene etc.

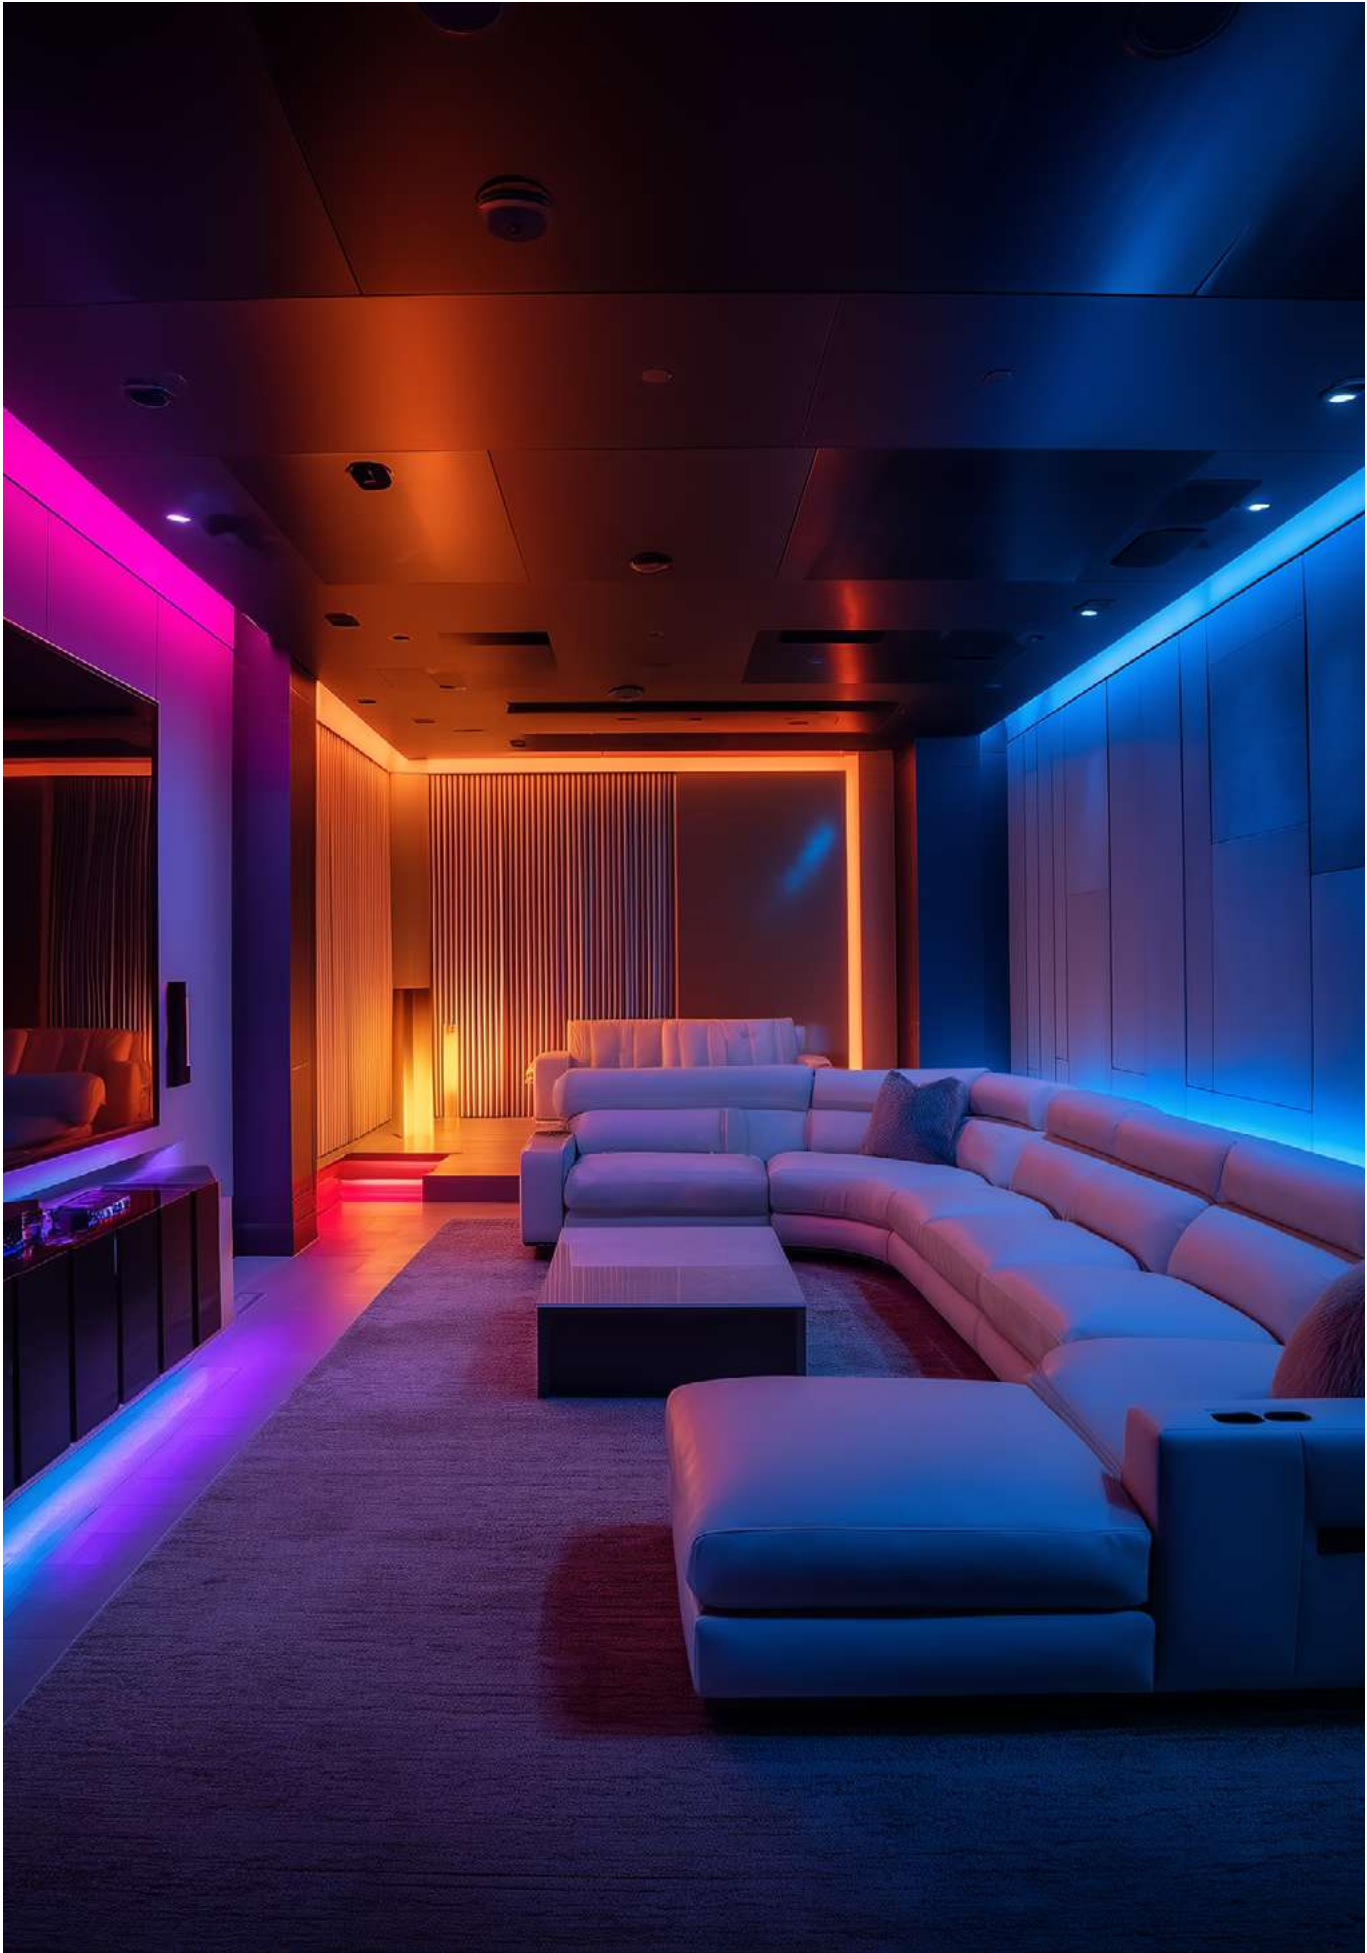

LED PROFILE


Estrusi d'alluminio studiati e progettati per garantire la miglior dissipazione di calore per le nostre STRIP LED. La gamma offre diverse modalità d'applicazione ed ogni tipologia è dotata dei suoi accessori.

LED PROFILE SERIES



PR1708


- Material: Extruded aluminum
 - Length: 2mt & 3mt
- Materiale: alluminio estruso
 - Lunghezza: 2mt & 3mt



FINISH




Anod. Aluminun



- PR1708.O** PC diffused cover Opal
PR1708.T PC diffused cover Transparent
PR1708.F PC diffused cover Frosted

End Caps



End cap with hole
End cap without hole
PRCAP1708

Accessories



Mounting clip (metal)
PRCLIP1708



Mounting clip (pc)
PRCLIP1708-P




Adjustable bracket
PRCLIPA1708



PR2308


- Material: Extruded aluminum
 - Length: 2mt & 3mt
- Materiale: alluminio estruso
 - Lunghezza: 2mt & 3mt



FINISH



Anod. Aluminun




- PR1708.O** PC diffused cover Opal
PR1708.T PC diffused cover Transparent
PR1708.F PC diffused cover Frosted

End Caps



End cap with hole
End cap without hole
PRCAP2308

Installation Steps

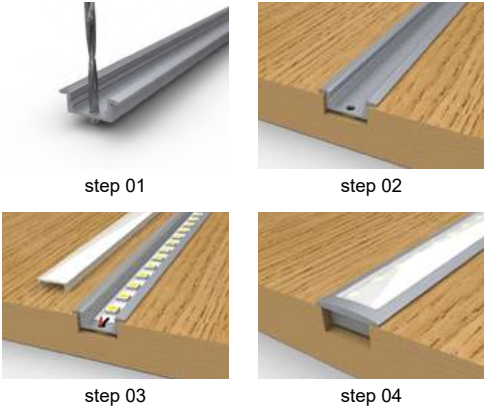


LED PROFILE SERIES



PRLP05


- Material: Extruded aluminum
 - Length: 2mt & 3mt
- Materiale: alluminio estruso
 - Lunghezza: 2mt & 3mt



FINISH



Anod. Aluminun



- PR1708.O** PC diffused cover Opal
PR1708.T PC diffused cover Transparent
PR1708.F PC diffused cover Frosted

End Caps



End cap with hole
End cap without hole
PRCAPLP05

Accessories




Mounting clip (metal)
PRCLIPLP05



PR3628

- Material: Extruded aluminum
 - Length: 3mt
- Materiale: alluminio estruso
 - Lunghezza: 3mt



FINISH



Anod. Aluminun



- PR3628.O** PC diffused cover Opal 3mt
PR3628.T PC diffused cover Transparent 3mt

End Caps



End cap with hole
End cap without hole
PRCAP3628

Accessories



Spring clip
PRCLIP3628


LED PROFILE SERIES



PR1816

- Material: Extruded aluminum
- Length: 2mt

- Materiale: alluminio estruso
- Lunghezza: 2mt



FINISH



Anod. Aluminun

End Caps



End cap with hole
End cap without hole

PRCAP1816

Accessories



Mounting clip (metal)

PRCLIP1816



PMMA Opal Matte


PR1816.O



PR1720

- Material: Extruded aluminum
- Length: 3mt

- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun



PR1720.F30 PC Frosted cover 30°

End Caps



End cap with hole
End cap without hole

PRCAP1720

Accessories



Mounting clip (metal)

PRCLIP1708



Mounting clip (PC)

PRCLIP1708-P


LED PROFILE SERIES



PR1715R

- Material: Extruded aluminum
- Length: 3mt


- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun



PR1708.O PC diffused cover Opal
PR1708.T PC diffused cover Transparent
PR1708.F PC diffused cover Frosted

End Caps



End cap with hole
End cap without hole

PRCAP1708

Accessories



Mounting clip (metal)

PRCLIP1708



Mounting clip (pc)

PRCLIP1708-P



Adjustable bracket


PRCLIPA1708



PR1616

- Material: Extruded aluminum
- Length: 3mt


- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun



PR3628.O PC diffused cover Opal
PR3628.F PC diffused cover Frosted

End Caps



End cap with hole
End cap without hole

PRCAP1616

Accessories



Mounting clip (metal)


PRCLIP1616

LED PROFILE SERIES



PR1920S

- Material: Extruded aluminum
- Length: 3mt
- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun

End Caps



End cap with hole
End cap without hole

PRCAP1920S




PR1920S.O PC diffused cover Opal
PR1920S.F PC diffused cover Frosted



PR2315

- Material: Extruded aluminum
- Length: 3mt
- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun

End Caps



End cap with hole
End cap without hole

PRCAP2315



PR2315.O

Installation Steps



step 01




step 02

LED PROFILE SERIES



PR1805

- Material: Extruded aluminum
- Length: 3mt
- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun

End Caps



End cap with hole
End cap without hole

PRCAP1805

Accessories



Mounting clip (metal)

PRCLIP1805




PC diffused cover Opal

PR1805.O



PR2525

- Material: Extruded aluminum
- Length: 3mt
- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun



PR2525.O PC diffused cover Opal

End Caps



End cap with hole
End cap without hole

PRCAP2525

Accessories



Mounting clip (metal)


PRCLIP2525



Steel wire

PRWIRE2525


LED PROFILE SERIES

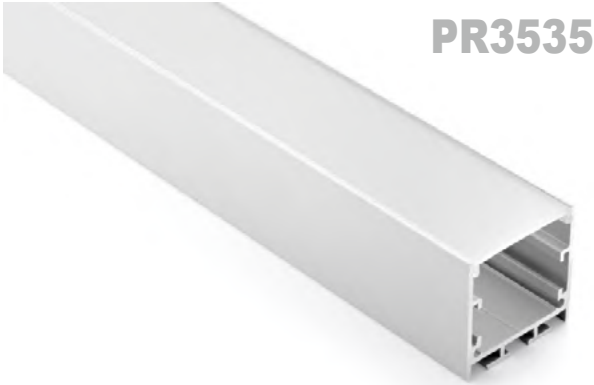

PR3535

- Material: Extruded aluminum
- Length: 3mt

- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun

End Caps



End cap with hole
End cap without hole

PRCAP3535

Accessories



Mounting clip (metal)

PRCLIP3535



Steel wire

PRWIRE3535



PC diffused cover Opal

PR3535.O


LED PROFILE SERIES



PR2711

- Material: Extruded aluminum
- Length: 3mt

- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun

End Caps




End cap with hole
End cap without hole

PRCAP2711



PC diffused cover Opal


PR2711.O

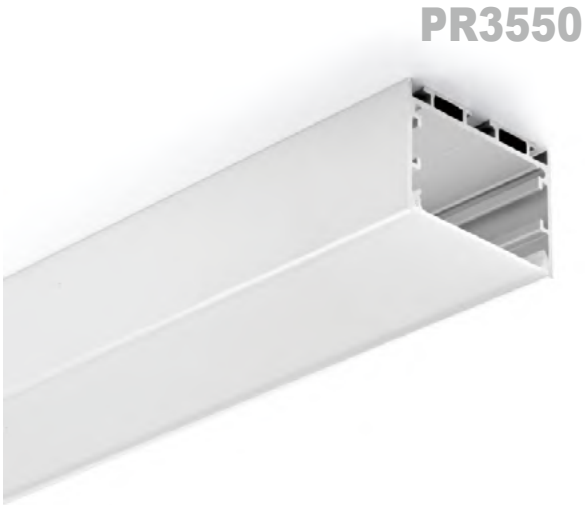

PR3550

- Material: Extruded aluminum
- Length: 3mt

- Materiale: alluminio estruso
- Lunghezza: 3mt



FINISH



Anod. Aluminun

End Caps



End cap with hole
End cap without hole

PRCAP3550

Accessories



Mounting clip (metal)

PRCLIP3550



Steel wire

PRWIRE3550



PC diffused cover Opal

PR3550.O


Handwriting practice lines on the left page, consisting of 20 horizontal dashed lines.

Handwriting practice lines on the right page, consisting of 20 horizontal dashed lines.



RG LUCE srl

Via Vittime del Razzismo N° 15
26817 SAN MARTINO IN STRADA (LO) ITALY
Tel : +39 0371 476214
Fax : +39 0371 615005
info@rglucersrl.it



www.rglucersrl.it